### 2-Color Display

## Digital Flow Switch

Applicable fluid Dry air, N<sub>2</sub>, Ar, CO<sub>2</sub>








### A wide range of flow measurement is possible with 1 product.

Flow ratio\*2 100: 1

\*2 Excludes the PF2M725 \*3 Made to order (Produced upon receipt of order)

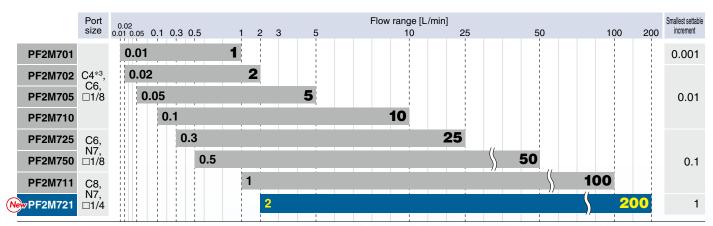

### **♦ IO**-Link Compatible

The flow rate value and the device status can be figured out easily via the process data.

PF2M7-L Series p. 4

Diagnosis items

Over current error, Outside of rated flow range, Accumulated flow error, Internal product malfunction

Made to order

Compatible with argon (Ar) and carbon dioxide (CO2) mixed gas



### Improved resistance to moisture and foreign matter p.1

The bypass construction reduces sensor accuracy deterioration and damage.

\* There is no bypass construction for the 1 and 2 L ranges.



A rear ported type has been added.



A flow adjustment valve (0.05 to 5 L/min) has been added.








ESOC CE THE MAN OF


## Improved resistance to moisture and foreign matter

The bypass construction reduces the moist air or foreign matter in contact with the sensor, reducing sensor accuracy deterioration and damage.

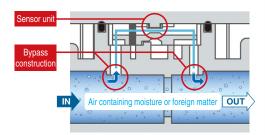

\* There is no bypass construction for the 1 and 2 L ranges.

### Compact, Lightweight

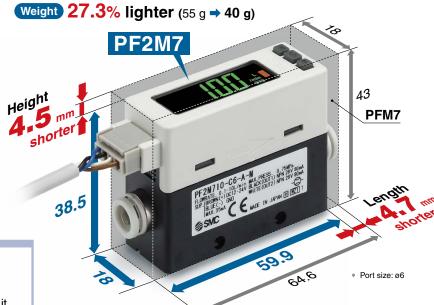

### Reversible display mode

When the product is mounted upside down, the orientation of the display can be rotated to make it easier to read.



# A flow adjustment valve is integrated into the product.

Space-saving designReduced piping

labor



### **Piping variations**

One-touch fitting



Made to order (Produced upon receipt of order)

ø8 ø1/4"

Female thread



Straight (Rc, NPT, G)

New Rear ported 1/8, 1/4

### **Display OFF mode**



LEDs can be turned off and checked when necessary. The product can also be used as a remote sensor.

FINE CE WE NAMED TO

### Mounting variations







Panel mounting

## The digital display allows for the visualization of the flow rate.


2-color display, Improved visibility



Select a model according to the fluid




### Recommended pneumatic circuit examples

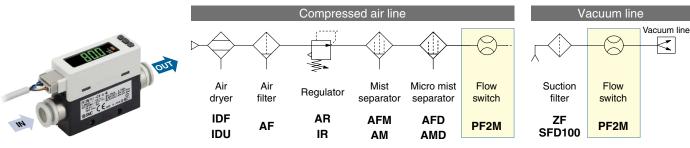


<sup>\*</sup> Recommended air quality class: JIS B 8392-1 1.1.2 to 1.6.2 (ISO 8753-1 1.1.2 to 1.6.2)

### **Analog free span function**

The analog span point (5 V (10 V), 20 mA) can be changed within 10 to 105% of the rated flow rate with respect to the displayed value.

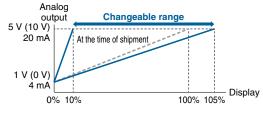

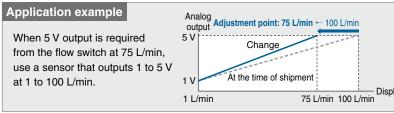

### Selectable analog output function

1 to 5 V or 0 to 10 V can be selected.

### **Delay time setting**

### Can be set between 0 and 60 s

The delay time can be set according to the application.

### **Grease-free**

| 27, 28                        |
|-------------------------------|
| Key-lock function             |
| Reset to the default settings |
| Delay time setting            |
| Error display function        |
| Setting of a security code    |
| Display mode                  |
| Zero cut-off function         |
| Accumulated value hold        |
| Simple setting mode           |
| Zero-clear function           |
|                               |


## Low current consumption: 35 mA\*1 or less

\*1 PFM7: 55 mA or less


## Power supply voltage: 12 to 24 V


\* For the IO-Link device: 18 to 30 V




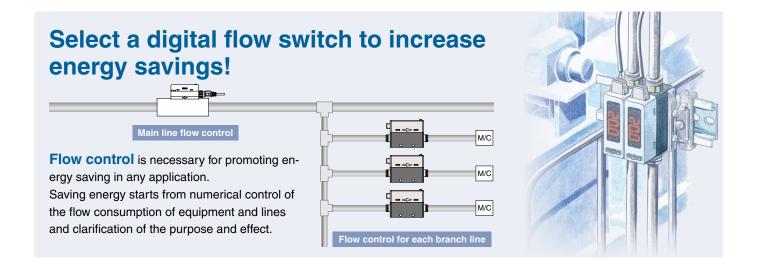



### **Applications**

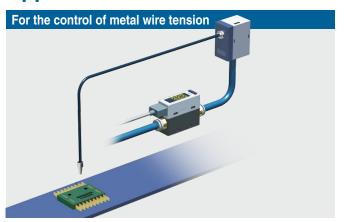

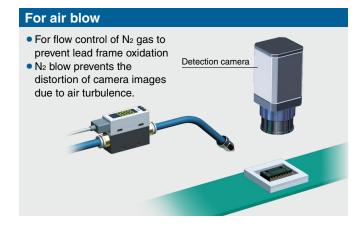

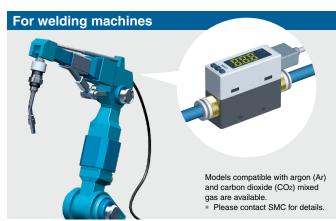

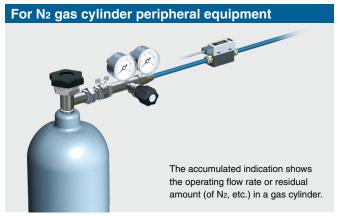

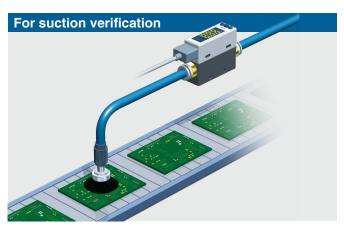




### IO-Link Compatible PF2M7□□-

p. **10** 

### Supports the IO-Link communication protocol

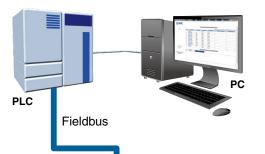

0

0

0

### Configuration File (IODD File\*1)

- · Manufacturer · Product part no.
- · Set value

IODD is an abbreviation of IO Device Description. This file is necessary for setting the device and connecting it to a master. Save the IODD file on the PC to be used to set the device prior to use.



interface technology between the sensor/actuator and the I/O terminal that is an

international standard: IEC61131-9.

IO-Link Compatible Device: Digital Flow Switch

### **Device settings** can be set by the master.

- Threshold value
- Operation mode, etc.

### Read the device data.

- · Switch ON/OFF signal and analog value
- Device information:

Manufacturer, Product part number, Serial number, etc.

- Normal or abnormal device status
- Cable breakage



### Implement diagnostic bits in the process data.

IO-Link Master

The diagnostic bit in the cyclic process data makes it easy to find problems with the equipment.

It is possible to find problems with the equipment in real time using the cyclic (periodic) data and to monitor such problems in detail with the noncyclic (aperiodic) data.

#### **Process Data**

| Bit offset | Item                     | Note          |
|------------|--------------------------|---------------|
| 0          | OUT1 output              | 0: OFF 1: ON  |
| 1          | OUT2 output              | 0: OFF 1: ON  |
| 8          | Diagnosis (flow rate)    | 0: OFF 1: ON  |
| 14         | Fixed output             | 0: OFF 1: ON  |
| 15         | Diagnosis (error)        | 0: OFF 1: ON  |
| 16 to 31   | Measured flow rate value | Signed 16 bit |

| Diagi             | iosis ilems                  |
|-------------------|------------------------------|
|                   | rrent error<br>of rated flow |
| range<br>· Accumu | lated flow                   |
| error             |                              |
| · Internal        | •                            |

| Bit offset | 31        | 30     | 29 | 28 | 27     | 26  | 25    | 24        | 23     | 22      | 21    | 20     | 19 | 18 | 17     | 16     |
|------------|-----------|--------|----|----|--------|-----|-------|-----------|--------|---------|-------|--------|----|----|--------|--------|
| Item       |           |        |    |    |        | Ме  | asure | d flow    | rate v | alue (l | PD)   |        |    |    |        |        |
| Bit offset | 15        | 14     | 13 | 12 | 11     | 10  | 9     | 8         | 7      | 6       | 5     | 4      | 3  | 2  | 1      | 0      |
| Item       | Error     | Fixed  |    | Re | servat | ion |       | Flow rate |        |         | Reser | vation |    |    | OUT2   | OUT1   |
|            | Diagnosis | Output |    |    |        |     |       | Diagnosis |        |         |       |        |    |    | Switch | output |

### Application Example For the predictive maintenance of suction verification The flow rate "switch ON/OFF signals" and "analog values" are monitored to determine the suction status. The process and suction status can then be compared.

### **Operation and Display**

| Communication with master | IO-Link status indicator light | Status     |       | Screen display*2 | Description                   |   |  |     |     |    |             |              |     |               |                 |  |                        |        |   |
|---------------------------|--------------------------------|------------|-------|------------------|-------------------------------|---|--|-----|-----|----|-------------|--------------|-----|---------------|-----------------|--|------------------------|--------|---|
|                           | *1                             |            |       | Operate          | ope.                          | Normal communication status (readout of measured value) |  |     |     |    |             |              |     |               |                 |  |                        |        |   |
| Yes                       | IO-Link mode (Flashing)        |            |       |                  | Start up                      | Strt.   |  |     |     |    |             |              |     |               |                 |  |                        |        |   |
| res                       |                                |            |       | Preoperate       | At the start of communication | At the start of communication                           |  |     |     |    |             |              |     |               |                 |  |                        |        |   |
|                           |                                | (Flashing) | **1   | **1              | <b>€ €</b> *1                 | *1  | <b>**</b> 1  | **1 | **1 | *1 | <b>**</b> 1 | <b>€</b> €*1 | **1 | <b>€○€</b> *1 | IO-Link<br>mode |  | Version does not match | Er 15. | The IO-Link version does not match that of the master. The master uses version 1.0. |
| No                        |                                |            |       | Abnormal         | Communication disconnection   | ope<br>Strt<br>Pre                                      | Normal communication was not received for 1 s or longer. |     |     |    |             |              |     |               |                 |  |                        |        |   |
|                           | OFF                            | 8          | SIO m | ode              | 5 10                          | General switch output                                   |  |     |     |    |             |              |     |               |                 |  |                        |        |   |

- \*1 In IO-Link mode, the IO-Link indicator is ON or flashing.
  \*2 "LoC" is displayed when the data storage lock is enabled. (Except for when the version does not match or when in SIO mode) The display color can be set to red or green.




## 3-Screen Display Digital Flow Monitor PFG300 Series p. 28-1




### **Allows for the Monitoring of Remote Lines**


Current model

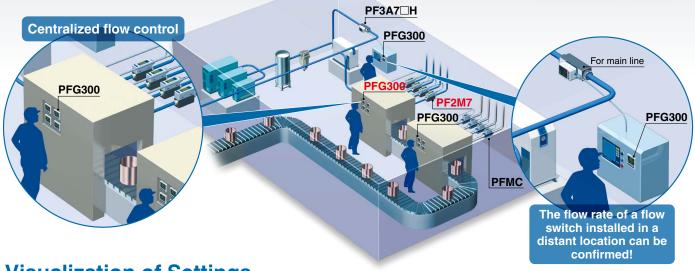


### **Visualization of Settings**





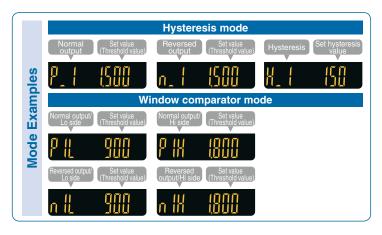

### **Easy Screen Switching**

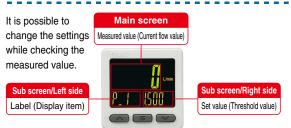


The sub screen can be switched by pressing the up/down buttons.




\* Either "Input of line name" or "Display OFF" can be added via the function settings.

### **Simple 3-Step Setting**

When the S button is pressed and the set value  $(P_1)$  is being displayed, the set value (threshold value) can be set. When the S button is pressed and the hysteresis  $(H_1)$  is being displayed, the hysteresis value can be set.

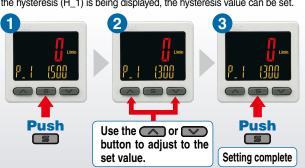

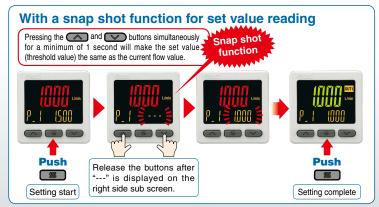

### **NPN/PNP Switch Function**

The number of stock items can be reduced.







### Analog output of 0 to 10 V is also available.


| \/altaga autout | 1 to 5 V   | Switchable |
|-----------------|------------|------------|
| Voltage output  | 0 to 10 V  | Switchable |
| Current output  | 4 to 20 mA | Fixed      |

### **Input Range Selection (for Pressure/Flow rate)**

The displayed value to the sensor input can be set as required.

(Voltage input: 1 to 5 V/Current input: 4 to 20 mA)


Pressure switch/Flow switch can be displayed.



A is displayed for 1 V (or 4 mA). B is displayed for 5 V (or 20 mA). The range can be set as required.

■ Pressure Sensor for General Fluids/PSE570






|               | Α    | В     |
|---------------|------|-------|
| <b>PSE570</b> | 0    | 1,000 |
| <b>PSE573</b> | -100 | 100   |
| PSE574        | 0    | 500   |

Set A and B to the values shown in the table above.

### **Convenient Functions**

### Copy function

The set values of the monitor can be copied.

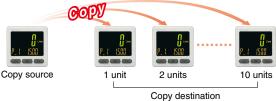

### Security code

The key locking function keeps unauthorized persons from tampering with the settings.

### Power saving mode

Power consumption is reduced by turning off the monitor.

| Current consumption*1 | Reduction rate*2      |
|-----------------------|-----------------------|
| 25 mA or less         | Approx. 50% reduction |


|   | 25 mA or less           | Approx. 50% reduction   |
|---|-------------------------|-------------------------|
| 1 | During normal operation | *2 In power saving mode |

### External input function

The accumulated value, peak value, and bottom value can be reset remotely.

### **Compact & Lightweight**

- Compact: Max. 6 mm shorter
- Lightweight: Max. 5 g lighter (30 g → 25 g)

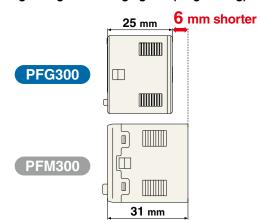


### Functions (▶ Refer to pages 28-7 to 28-9 for details.)

- Output operation
- Simple setting mode
- Display color
- Delay time setting
- Digital filter setting
- FUNC output switching function
- Selectable analog output function
- External input function Forced output function
- Accumulated value hold
- Peak/Bottom value display
- Setting of security code
- Keylock function
- Reset to the default settings
- Display with zero cut-off setting
- Selection of display on sub screen
- Analog output free range function
- Error display function
- Copy function
- Selection of power saving mode

### Mounting

The bracket configuration allows for mounting in four orientations.

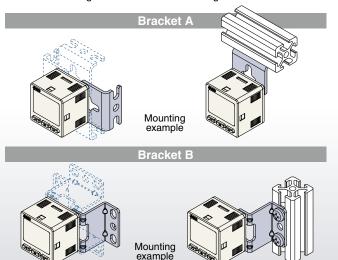



#### Panel mount

Mountable side by side without clearance


### One opening!

- · Reduced panel fitting labor
- · Space saving






### Flow Switch Flow Rate Variations

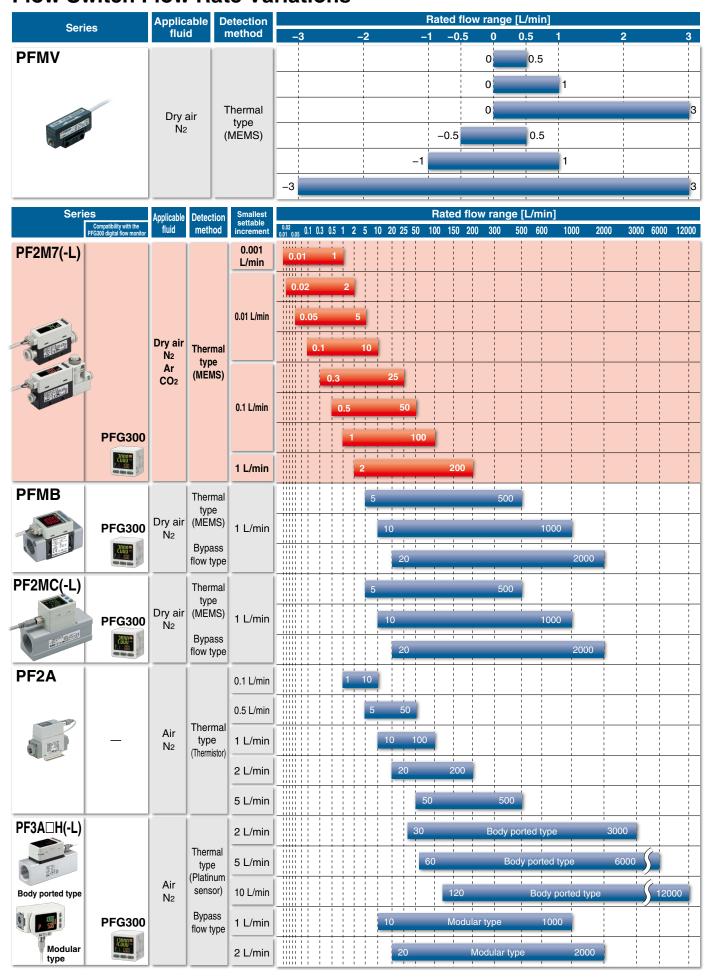

### Flow Switch Variations / Basic Performance Table

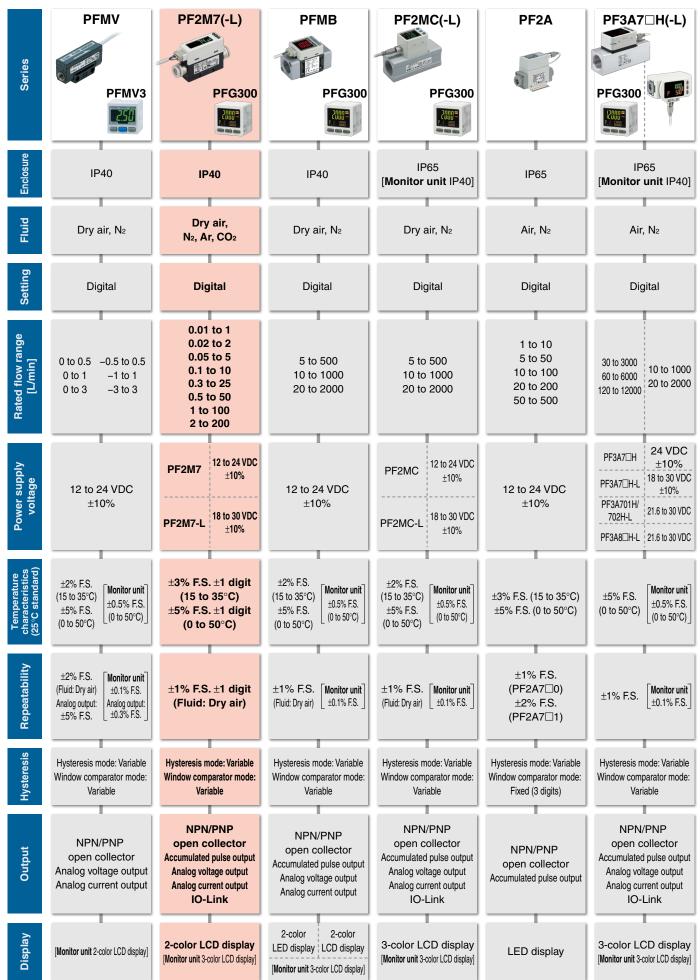

<sup>\*</sup> The monitor unit values are for the PFG300 and PFMV3.



## CONTENTS

# 2-Color Display Digital Flow Switch *PF2M7(-L) Series*3-Screen Display Digital Flow Monitor *PFG300 Series*



### 2-Color Display Digital Flow Switch PF2M7(-L) Series

| How to Order  | p. 9  |
|---|-------|
| Specifications  | p. 11 |
| Set Point Range and Rated Flow Range                            | p. 13 |
| Flow/Analog Output ····   | p. 13 |
| Pressure Loss (Reference Data): Without Flow Adjustment Valve   | p. 14 |
| Flow Rate Characteristics (Reference Data)                      | p. 14 |
| Flow Rate Characteristics at Negative Pressure (Reference Data) | p. 15 |
| Internal Circuits and Wiring Examples                           | p. 16 |
| Construction: Parts in Contact with Fluid                       | p. 18 |
| Dimensions  | p. 19 |
| Made to Order   | p. 26 |
| Function Details  | p. 27 |




### 3-Screen Display Digital Flow Monitor PFG300 Series

| How to Order                          | p. 28-1 |
|---------------------------------------|---------|
| Specifications                        | p. 28-2 |
| Internal Circuits and Wiring Examples | p. 28-3 |
| Dimensions                            | p. 28-4 |
| Function Details                      | p. 28-7 |
|                                       |         |

Safety Instructions ------ Back cover

# 2-Color Display Digital Flow Switch RoHS

## PF2M7 Series

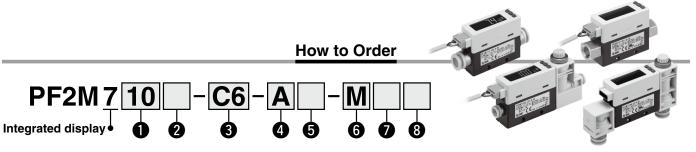

### Rated flow range

| _  |                 |
|----|-----------------|
| 01 | 0.01 to 1 L/min |
| 02 | 0.02 to 2 L/min |
| 05 | 0.05 to 5 L/min |
| 10 | 0.1 to 10 L/min |

| 25 | 0.2 to 25 L/min |
|----|-----------------|
| 50 | 0.5 to 50 L/min |
| 11 | 1 to 100 L/min  |
| 21 | 2 to 200 L/min  |

### 2 Flow adjustment valve/Piping entry direction

| Cumbal | Flow adjustment | Piping entry | Piping entry Rated flow range |   |   |    |            |    |     |     |
|--------|-----------------|--------------|-------------------------------|---|---|----|------------|----|-----|-----|
| Symbol | valve           | direction    | 1                             | 2 | 5 | 10 | 25         | 50 | 100 | 200 |
| Nil    | None            | Straight     | •                             |   | • | •  | •          | •  | •   |     |
| S      | Yes             | Straight     | _                             | _ | • | •  | lacksquare |    | •   |     |
| L      | None            | Rear ported  | •                             | • | • | •  | •          | •  | •   | •   |
| W      | Yes             | Rear ported  | _                             | _ | • | •  | lacksquare |    | •   |     |


\* 1 and 2 L/min type products are not available with a flow adjustment valve.

### 3 Port size

| Cumbal  | Dort oizo  | Rated flow range |          |     |              |     |          |     |      |
|---------|------------|------------------|----------|-----|--------------|-----|----------|-----|------|
| Symbol  | Port size  | 1                | 2        | 5   | 10           | 25  | 50       | 100 | 200  |
| 01      | Rc1/8      | •                | •        | •   | •            | •   | •        | _   | _    |
| N1      | NPT1/8     | •                | •        | •   | •            | •   | •        | _   | _    |
| F1      | G1/8       | •                | •        | •   | •            | •   | •        | _   | _    |
| 02      | Rc1/4      | _                | <u> </u> | _   | <del>-</del> | _   | <u> </u> | •   |      |
| N2      | NPT1/4     | _                | _        | _   | _            | _   | _        | •   | •    |
| F2      | G1/4       | _                | <u> </u> | _   | <del>-</del> | _   | <u> </u> | •   |      |
| C4*1    | ø4         | •                | •        | •   | •            | _   | _        | _   | _    |
| C6      | ø6         |                  | •        | •   | •            |     | •        | _   | _    |
| C8      | ø8         |                  |          | _   |              |     |          | •   |      |
| N7      | ø1/4"      | _                | _        | _   | <u> </u>     | •   | •        | •   |      |
| *1 Made | n to order | · /D             | rodi     | 100 | 4            | non | ro       | oin | t of |

order)

### Piping variations



\*2 Made to order (Produced upon receipt of order)

### 4 Output specification

| Symbol | OUT1 | OUT2   |  |  |  |  |  |
|--------|------|--|--|--|--|--|--|
| Α      | NPN  | NPN  |  |  |  |  |  |
| В      | PNP  | PNP  |  |  |  |  |  |
| С      | NPN  | Analog 1 to 5 V $\Leftrightarrow$ Analog 0 to 10 V*3 |  |  |  |  |  |
| D      | NPN  | Analog 4 to 20 mA                                    |  |  |  |  |  |
| E      | PNP  | Analog 1 to 5 V $\Leftrightarrow$ Analog 0 to 10 V*3 |  |  |  |  |  |
| F      | PNP  | Analog 4 to 20 mA                                    |  |  |  |  |  |


\*3 1 to 5 V or 0 to 10 V can be selected by pressing the button. The default setting is 1 to 5  $\rm V.$ 

### Option 2

| 1411               | 11  | •  |  |  |  |  |  |
|--------------------|---|--|--|--|--|--|--|
|                    | Bracket (For the type without a flow adjustment valve)                        | Bracket (For the type with a flow adjustment valve)                            |  |  |  |  |  |
| Without<br>bracket | ZS-33-M With 2 tapping screws  * Interchangeable with the existing PFM series | ZS-33-MS With 3 tapping screws  * Interchangeable with the existing PFM series |  |  |  |  |  |
|                    | T   | V  |  |  |  |  |  |
|                    | ount adapter (For the type a flow adjustment valve)                           | Panel mount adapter (For the type with a flow adjustment valve)                |  |  |  |  |  |
|                    | Panel mount adapter al mount apter B  | ZS-33-2JS Panel mount adapter S Panel mount adapter B Panel                    |  |  |  |  |  |
| W-N                | Nounting bracket  | Mounting bracket   |  |  |  |  |  |

\* Options are shipped together with the product but do not come assembled.

### Option 1

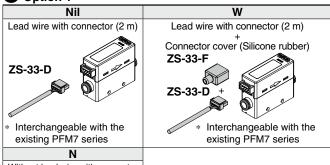

### Without lead wire with connector

| Unit specification |                           |  |  |  |  |  |  |  |
|--------------------|---------------------------|--|--|--|--|--|--|--|
| M                  | SI unit only*4            |  |  |  |  |  |  |  |
| Nil                | Unit selection function*5 |  |  |  |  |  |  |  |


- \*4 Fixed unit: Instantaneous flow: L/min Accumulated flow: L
- \*5 This product is for overseas use only. (The SI unit type is provided for use in Japan in accordance with the New Measurement Act.) The unit can be changed. Instantaneous flow: L/min ⇔ cfm Accumulated flow:  $L \Leftrightarrow ft^3$

#### Calibration certificate\*6

| Nil | None |
|-----|------|
| Α   | Yes  |


\*6 Made to order The certificate is in both English and Japanese.

### **DIN Rail Mounting Bracket (To Be Ordered Separately)**

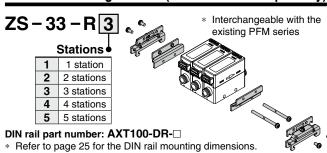

# 2-Color Display Digital Flow Switch RoHS

## PF2M7-L Series

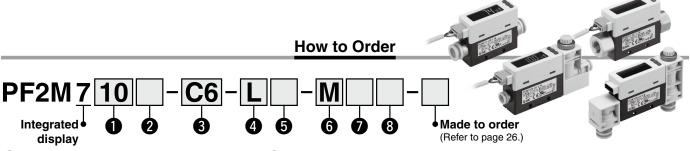

### Rated flow range

| 01 | 0.01 to 1 L/min |
|----|-----------------|
| 02 | 0.02 to 2 L/min |
| 05 | 0.05 to 5 L/min |
| 10 | 0.1 to 10 L/min |

| 25 | 0.2 to 25 L/min |
|----|-----------------|
| 50 | 0.5 to 50 L/min |
| 11 | 1 to 100 L/min  |
| 21 | 2 to 200 L/min  |

### 2 Flow adjustment valve/Piping entry direction

| Cumbal | Flow adjustment | Piping entry | riping entry Rated flow range |   |   |    |            |    |     |            |
|--------|-----------------|--------------|-------------------------------|---|---|----|------------|----|-----|------------|
| Symbol | valve           | direction    | 1                             | 2 | 5 | 10 | 25         | 50 | 100 | 200        |
| Nil    | None            | Straight     | lacksquare                    |   | • | •  | lacksquare | •  | •   |            |
| S      | Yes             | Straight     | _                             | _ | • | •  | •          | •  | •   | lacksquare |
| L      | None            | Rear ported  | •                             |   | • | •  | •          | •  | •   |            |
| W      | Yes             | Rear ported  | _                             |   | • | •  | •          | •  | •   |            |


\* 1 and 2 L/min type products are not available with a flow adjustment valve.

### 3 Port size

| Cumbal  | Dort oizo                                  |   | R | ate          | d flo    | ow r | anç | ge  |     |
|---------|--|---|---|--------------|----------|------|-----|-----|-----|
| Symbol  | Port size                                  | 1 | 2 | 5            | 10       | 25   | 50  | 100 | 200 |
| 01      | Rc1/8                                      |   | • | •            |          |      | •   | _   |     |
| N1      | NPT1/8                                     | • | • | lacktriangle | •        | •    | •   | _   | _   |
| F1      | G1/8                                       | • | • | •            | •        | •    | •   | _   | _   |
| 02      | Rc1/4                                      | _ | _ | _            |          | _    | _   | •   |     |
| N2      | NPT1/4                                     | _ | _ | _            | -        | _    | _   | •   | •   |
| F2      | G1/4                                       | _ | _ | _            |          | _    | _   | •   |     |
| C4*1    | ø4   | • | • | •            | •        | _    | _   | _   | _   |
| C6      | ø6   |   | • | •            | •        |      | •   | _   | _   |
| C8      | ø8   |   |   |              |          |      |     | •   |     |
| N7      | ø1/4"                                      | _ | _ | _            | <u> </u> | •    | •   | •   |     |
| ±1 Made | *1 Made to order (Produced upon receipt of |   |   |              |          |      |     |     |     |

\*1 Made to order (Produced upon receipt of order)

### **Piping variations**



\*2 Made to order (Produced upon receipt of order)

### 4 Output specification

| Symbol | OUT1                | OUT2               |
|--------|---------------------|--------------------|
| L      | IO-Link/            | _                  |
|        | NPN/PNP             | NIDNI/DNID/E-+     |
| L2     | IO-Link/            | NPN/PNP/External   |
|        | NPN/PNP             | input              |
| L3     | IO-Link/            | Analog 1 to 5 V ⇔  |
| LJ     | NPN/PNP             | Analog 0 to 10 V*3 |
| L4     | IO-Link/<br>NPN/PNP | Analog 4 to 20 mA  |
|        |                     |                    |

\*3 1 to 5 V or 0 to 10 V can be selected by pressing the button. The default setting is 1 to 5 V.

### 6 Unit specification

| М  | SI unit only*4            |  |  |  |  |
|--|---------------------------|--|--|--|--|
| Nil                                      | Unit selection function*5 |  |  |  |  |
| *4 Fixed unit: Instantaneous flow: L/min |                           |  |  |  |  |

Accumulated flow: L


\*5 This product is for overseas use only.

(The SI unit type is provided for use


(The SI unit type is provided for use in Japan in accordance with the New Measurement Act.)


The unit can be changed. Instantaneous flow: L/min  $\Leftrightarrow$  cfm Accumulated flow: L  $\Leftrightarrow$  ft<sup>3</sup>

### Option 1

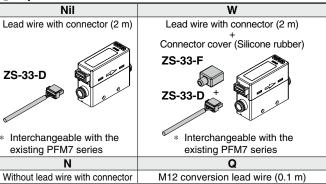


### Option 2

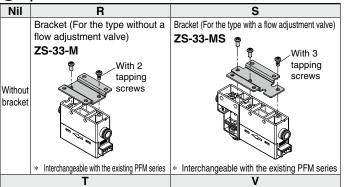



Panel mount adapter (For the type with a flow adjustment valve)



Options are shipped together with the product but do not come assembled.

### 8 Calibration certificate\*

| <b>O</b> Cai | ibration certificate |
|--------------|----------------------|
| Nil          | None                 |
| Α            | Yes                  |

\*6 Made to order
The certificate is in both
English and Japanese.


### **Made to Order**

| Symbol | Specification  |
|--------|--|
| X731   | Compatible with argon (Ar) and carbon dioxide (CO <sub>2</sub> ) mixed gas |

For details, refer to page 26.

### DIN Rail Mounting Bracket (To Be Ordered Separately)

Refer to page 9.

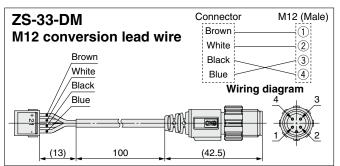

### **Specifications**

For flow switch precautions and specific product precautions, refer to the Operation Manual on the SMC website.

| Model   PF2M701   PF2M702   PF2M705   PF2M710   PF2M725   PF2M750   PF2M711 |  |   |                            |   | DECNIZOS   |   |  |   |  |   |  |  |  |  |
|---|--|---|----------------------------|---|--|---|--|---|--|---|--|--|--|--|
| _   |  |   | PF2M701                    | PF2M702   | PF2M705  | PF2M710   | <b>PF2M725</b><br>2, Ar, CO2   | PF2M750   | PF2M711  | PF2M721   |  |  |  |  |
| Fluid   | Applicable fluid   | ·1  |                            |   | (JIS B 8392-1  |   | z, Ai, 002<br>, ISO 8573–1   | 1.1.2 to 1.6.2)   |  |   |  |  |  |  |
| ш   | Fluid temperatu  |   |                            |   |  | 0 to  |  |   |  |   |  |  |  |  |
|   | Detection metho  |   | Thermal type (I            |   |  |   | nermal type (B   | ,, ,,   |  | 1   |  |  |  |  |
|   | Rated flow rang  |   | 0.01 to 1                  | 0.02 to 2   | 0.05 to 5  | 0.1 to 10   | 0.3 to 25  | 0.5 to 50   | 1 to 100   | 2 to 200<br>2 to 100  |  |  |  |  |
|   | [L/min]  | CO2 Instantaneous flow [L/min]  | 0.01 to 0.5                | 0.02 to 1   | 0.05 to 2.5  | 0.1 to 5<br>-0.5 to 10.5  | 0.3 to 12.5<br>-1.3 to 26.3  | 0.5 to 25<br>-2.5 to 52.5   | 1 to 50<br>-5 to 105   | -10 to 210  |  |  |  |  |
| Flow  | Set point range  | Accumulated flow [L]  | 0.00 to 99                 |   | 0.0 to 999   |   | -1.3 to 20.3   |   | 9999999  | -1010210  |  |  |  |  |
| 正   | Smallest settabl   |   | 0.001                      | 00000.00  | 0.01   |   |  | 0.1   |  |   |  |  |  |  |
|   | increment  | Accumulated flow [L]  | 0.0                        | )1  | 0.   | .1  |  |   | 1  |   |  |  |  |  |
|   |  | ume per pulse [L/pulse]   |                            | 0.01  |  |   | 0.1  |   |  | 1   |  |  |  |  |
|   |  | lue hold function*2   |                            |   | Interva  |   | utes can be se   | elected.  |  |   |  |  |  |  |
| go .  | Operating press  |   |                            |   |  | -0.1 to 0   |  |   |  |   |  |  |  |  |
| sar   | Rated pressure<br>Proof pressure   | range "S  |                            |   |  | -0.07 to  | 0.75 MPa<br>MPa  |   |  |   |  |  |  |  |
| Pressure  | Pressure loss  |   |                            |   | Ret  |   | sure Loss" gra   | nh  |  |   |  |  |  |  |
| Δ.  | Pressure charac  | teristics   |                            |   |  |   | 0.35 MPa stand   | •   |  |   |  |  |  |  |
| <u>a</u>  | Power supply F   | or the switch output device   |                            |   |  | 12 to 24 V  |  | ,   |  |   |  |  |  |  |
| Electrical  | voltage*4  | or the IO-Link device   |                            |   |  |   | DC ±10%  |   |  |   |  |  |  |  |
| <u>e</u>  | Current consum   | ption   |                            |   |  |   | or less  |   |  |   |  |  |  |  |
|   | Protection   |   |                            |   |  |   | rotection  |   |  |   |  |  |  |  |
| <b>^</b> *2   | Display accurac  |   |                            |   |  | ±3% F.S<br>±3%  |  |   |  |   |  |  |  |  |
| Accuracy*5  | Repeatability  | oouracy   |                            | +1% F   | S. ±1 digit (±2%   |   |  | l filter is set to  | 0.05 s)  |   |  |  |  |  |
| ြင္ပ  |  |   | 1                          | ±1/V1.  |  |   | 35°C: 25°C st  |   | 00 0)  |   |  |  |  |  |
| Ă   | Temperature ch   | Iracteristics   |                            |   |  | 6. ±1 digit (0 to   | 50°C: 25°C sta   |   |  |   |  |  |  |  |
|   | Output type  |   |                            |   |  | NPN/PNP o   |  |   |  |   |  |  |  |  |
|   | Output mode  |   | Sel                        | ect from Hyste  | eresis, Window   |   |  |   | ated pulse out   | put,  |  |  |  |  |
|   | •  | -   |                            |   |  |   | h output OFF r   |   |  |   |  |  |  |  |
|   | Switch operatio<br>Max. load currer  |   |                            |   | Selec  |   | or Reversed o  | utput.  |  |   |  |  |  |  |
| l pr  | Max. applied   | Standard  | 80 mA<br>28 VDC (NPN only) |   |  |   |  |   |  |   |  |  |  |  |
| o th  | voltage  | IO-Link compatible  | 30 VDC (NPN only)          |   |  |   |  |   |  |   |  |  |  |  |
| Switch output   | Internal voltage   | Standard  |                            | NPN: 1 V or less (Load current: 80 mA) PNP: 1.5 V or less (Load current: 80 mA) |  |   |  |   |  |   |  |  |  |  |
| N K   | drop   | IO-Link compatible  |                            | 1.5 V or less (Load current: 80 mA) 50 ms or less                               |  |   |  |   |  |   |  |  |  |  |
| 0,  | Response time*   |   | 0.1.1                      | 01 040  |  |   |  |   | 10 "   |   |  |  |  |  |
|   | Delay time*7   |   | Select fro                 | m 0 to 0.10 s (   | increment of 0)  |   | .0 s (incremen<br>s, 50 s, or 60 s.  |   | o 10 s (increme  | ent of 1 s),  |  |  |  |  |
|   | Hysteresis*8   |   |                            |   | <b>.</b>   | Variable  |  | •   |  |   |  |  |  |  |
|   | Protection   |   | Short circuit protection   |   |  |   |  |   |  |   |  |  |  |  |
| Analog<br>output*9  | Output type  |   | Voltage outpu              | it: 1 to 5 V, 0 to  | o 10 V (only wh  |   |  |   | , Current outp   | ut: 4 to 20 mA  |  |  |  |  |
| a<br>tbn  | Impedance  | Voltage output  |                            | 1 12 1  |  |   | ce: Approx. 1 k  |   |  | (40)/   |  |  |  |  |
| A 9   | Response time*   | Current output  Maximum load impedance: 600 Ω at power supply voltage of 24 V, 300 Ω at power supply voltage of 12 V  50 ms ±40%  |                            |   |  |   |  |   |  |   |  |  |  |  |
|   |  | Reference condition* <sup>11</sup> Select from Standard condition (STD) or Normal condition (NOR).  |                            |   |  |   |  |   |  |   |  |  |  |  |
|   | Display mode   |   |                            |   |  |   |  |   |  |   |  |  |  |  |
|   | Unit*12  | Instantaneous flow  |                            |   |  | L/min   | ı, cfm   |   |  |   |  |  |  |  |
| Display   | Onit   | Accumulated flow  |                            |   |  |   | ft <sup>3</sup>  |   |  | T   |  |  |  |  |
| lsp   | B  | Instantaneous flow [L/min]  | -0.05 to 1.05              | -0.1 to 2.1   |  |   | -1.3 to 26.3   |   |  | -10 to 210  |  |  |  |  |
|   | Display range  | Zero cut-off range Accumulated flow [L]*13  | 0.00 to 99                 |   | ±10% F.S. (Sele<br>0.0 to 999  |   | . for the maxim  |   | rate.)<br>9999999  |   |  |  |  |  |
|   | Display  | Accumulated now [L]   | 0.00 10 99                 | 33333.33  |  |   | n, 4 digits, 7 se  |   | 3333333  | ,   |  |  |  |  |
|   | Indicator LED  |   |                            |   |  |   | ut is ON (OUT  |   |  |   |  |  |  |  |
| Digita  | al filter*14   |   |                            |   | Select fro   |   | s, 0.5 s, 1 s, 2   | s, or 5 s.  |  |   |  |  |  |  |
|   | Enclosure  |   |                            |   |  | IP  |  |   |  |   |  |  |  |  |
| ig e  |  |   |                            |   |  |   | n  |   |  |   |  |  |  |  |
| nmental   | Withstand volta  |   |                            | 0 MO or more  |  |   |  |   | ale and housin   |   |  |  |  |  |
| rironmental<br>ssistance  | Withstand volta  | ance  | 5                          |   | (500 VDC me  | asured via me   | gohmmeter) be  | etween termina  |  | 3   |  |  |  |  |
| Environmental resistance  | Withstand volta  | ance<br>erature range   | 5                          | Operat  |  | asured via me<br>Stored: -10 to   | gohmmeter) be<br>60°C (No cond   | etween termina<br>densation or fr   | reezing)   |   |  |  |  |  |
|   | Withstand volta<br>Insulation resist<br>Operating temp<br>Operating humidards  | ance<br>erature range<br>lity range   | 5                          | Operat<br>Op  | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored  | asured via me<br>Stored: -10 to<br>: 35 to 85% Rh   | gohmmeter) be<br>60°C (No condens<br>H (No condens<br>king, UL (CSA)   | etween termina<br>densation or fr<br>ation or freezi  | reezing)<br>ng)  |   |  |  |  |  |
| Stand   | Withstand volta Insulation resist Operating temp Operating humidards Piping  | ance<br>erature range<br>lity range<br>ene-touch fitting  | 5                          | Operat<br>Op<br>C4 (ø4)   | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored<br>(/C6 (ø6)   | asured via me<br>Stored: -10 to<br>: 35 to 85% RI<br>CE/UKCA mar  | gohmmeter) be<br>60°C (No condens<br>I (No condens<br>king, UL (CSA)<br>C6 (ø6)/N                                    | etween termina<br>densation or fr<br>ation or freezi  | reezing)<br>ng)<br>C8 (ø8)/l                                       | N7 (ø1/4")  |  |  |  |  |
| Stand   | Withstand volta Insulation resist Operating temp Operating humidards Piping (Specification)  | ance<br>erature range<br>lity range<br>one-touch fitting<br>crew-in (Rc, NPT, G)  | 5                          | Operat<br>Op<br>C4 (ø4)   | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored  | asured via me<br>Stored: -10 to<br>I: 35 to 85% RH<br>CE/UKCA mar<br>PT1/8)/F1 (G1  | gohmmeter) be<br>60°C (No cond<br>I (No condens<br>king, UL (CSA)<br>C6 (Ø6)/N                                       | etween termina<br>densation or fr<br>ation or freezi  | reezing)<br>ng)<br>C8 (ø8)/l                                       |   |  |  |  |  |
| Stand<br>Stand  | Withstand volta Insulation resist Operating temp Operating humidards Piping (Specification Specification Specifica | ance erature range lity range one-touch fitting crew-in (Rc, NPT, G)  | 5                          | Operat<br>Op<br>C4 (ø4).<br>01  | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored<br>(/C6 (ø6)<br>(Rc1/8)/N1 (N  | asured via me<br>Stored: -10 to<br>: 35 to 85% Rh<br>CE/UKCA mar<br>PT1/8)/F1 (G1<br>Straigh  | gohmmeter) be<br>60°C (No condens<br>H (No condens<br>king, UL (CSA)<br>C6 (ø6)/N<br>/8)<br>t, Rear                  | etween termina<br>densation or freezin<br>ation or freezin<br>)<br>N7 (ø1/4")               | reezing) ng)  C8 (ø8)/l 02 (Rc1/4)/N2 (N                           | N7 (ø1/4")  |  |  |  |  |
| Stand<br>Stand  | Withstand volta Insulation resist Operating temp Operating humidards Piping Specification Piping entry dire materials of part  | erature range lity range line-touch fitting crew-in (Rc, NPT, G) ection s in contact with fluid   | 5                          | Operat<br>Op<br>C4 (ø4).<br>01  | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored<br>(/C6 (ø6)<br>(Rc1/8)/N1 (N  | asured via me<br>Stored: -10 to<br>: 35 to 85% Rh<br>CE/UKCA mar<br>PT1/8)/F1 (G1<br>Straigh<br>steel 304, Bras   | gohmmeter) be<br>60°C (No condens<br>H (No condens<br>king, UL (CSA)<br>C6 (ø6)/N<br>/8)<br>t, Rear                  | etween termina<br>densation or freezin<br>ation or freezin<br>)<br>N7 (ø1/4")               | reezing) ng)  C8 (ø8)/l 02 (Rc1/4)/N2 (N                           | N7 (Ø1/4")<br>IPT1/4)/F2 (G1/4)                             |  |  |  |  |
| Stand<br>Stand  | Withstand volta Insulation resist Operating temp Operating humidards Piping (specification) Piping entry dire materials of part  | ance erature range lity range one-touch fitting crew-in (Rc, NPT, G)  | 5                          | Operat<br>Op<br>C4 (ø4).<br>01  | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored<br>(/C6 (ø6)<br>(Rc1/8)/N1 (N  | asured via me<br>Stored: –10 to<br>I: 35 to 85% Rh<br>CE/UKCA mar<br>PT1/8)/F1 (G1<br>Straigh<br>steel 304, Bras<br>nt: 40 g                                | gohmmeter) be<br>60°C (No condens<br>H (No condens<br>king, UL (CSA)<br>C6 (ø6)/N<br>/8)<br>t, Rear                  | etween termina<br>densation or freezin<br>ation or freezin<br>)<br>N7 (ø1/4")               | C8 (ø8)/l 02 (Rc1/4)/N2 (N Si, Au, GE4F Straig Rear                | N7 (ø1/4")<br>IPT1/4)/F2 (G1/4)<br>nt: 48 g<br>: 63 g       |  |  |  |  |
| Stand<br>Stand<br>Main  | Withstand volta Insulation resist Operating temp Operating humidards Piping (specification Septiments) Piping entry directly materials of part Body  | erature range lity range line-touch fitting crew-in (Rc, NPT, G) ection s in contact with fluid   | 5                          | Operat<br>Op<br>C4 (ø4).<br>01  | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored<br>(/C6 (ø6)<br>(Rc1/8)/N1 (N<br>KM, Stainless s<br>Straigh<br>Straigh | asured via me<br>Stored: -10 to<br>: 35 to 85% Rh<br>CE/UKCA mar<br>PT1/8)/F1 (G1<br>Straigh<br>steel 304, Bras<br>tt: 40 g<br>: 55 g<br>tt: 60 g           | gohmmeter) be<br>60°C (No condens<br>H (No condens<br>king, UL (CSA)<br>C6 (ø6)/N<br>/8)<br>t, Rear                  | etween termina<br>densation or freezin<br>ation or freezin<br>)<br>N7 (ø1/4")               | C8 (ø8)/l 02 (Rc1/4)/N2 (N Si, Au, GE4F Straig Rear Straight: 72 c | N7 (Ø1/4") IPT1/4)/F2 (G1/4) Int: 48 g : 63 g (G1/4: 117 g) |  |  |  |  |
| Stand<br>Stand<br>Main  | Withstand volta Insulation resist Operating temp Operating humidards Piping (specification Septiments) Piping entry directly materials of part Body  | ance brature range lity range lity range line-touch fitting crew-in (Rc, NPT, G) briction s in contact with fluid line-touch fitting crew-in  | 5                          | Operat<br>Op<br>C4 (ø4).<br>01  | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored<br>(/C6 (ø6)<br>(Rc1/8)/N1 (N<br>KM, Stainless s<br>Straigh<br>Rear:   | asured via me<br>Stored: -10 to<br>: 35 to 85% Rh<br>CE/UKCA mar<br>PT1/8)/F1 (G1<br>Straigh<br>steel 304, Bras<br>tt: 40 g<br>: 55 g<br>tt: 60 g           | gohmmeter) be<br>60°C (No condens<br>H (No condens<br>king, UL (CSA)<br>C6 (ø6)/N<br>/8)<br>t, Rear                  | etween termina<br>densation or fr<br>ation or freezi<br>)<br>N7 (Ø1/4")<br>nickel plating), | C8 (ø8)/l 02 (Rc1/4)/N2 (N Si, Au, GE4F Straig Rear Straight: 72 c | N7 (ø1/4")<br>IPT1/4)/F2 (G1/4)<br>nt: 48 g<br>: 63 g       |  |  |  |  |
| Stand<br>Stand<br>Stand<br>Stand  | Withstand volta Insulation resist Operating temp Operating humidards Piping Specification Piping entry dire materials of part Body Flow adjustmen Lead wire  | ance brature range lity range lity range line-touch fitting crew-in (Rc, NPT, G) briction s in contact with fluid line-touch fitting crew-in  | 5                          | Operat<br>Op<br>C4 (ø4).<br>01  | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored<br>(/C6 (ø6)<br>(Rc1/8)/N1 (N<br>KM, Stainless s<br>Straigh<br>Straigh | asured via me<br>Stored: -10 to<br>: 35 to 85% Rh<br>CE/UKCA mar<br>PT1/8)/F1 (G1<br>Straigh<br>steel 304, Bras<br>nt: 40 g<br>: 55 g<br>nt: 60 g<br>: 75 g | gohmmeter) be<br>60°C (No cond<br>H (No condens<br>king, UL (CSA)<br>C6 (ø6)/N<br>/8)<br>t, Rear<br>s (Electroless i | etween termina<br>densation or fr<br>ation or freezi<br>)<br>N7 (Ø1/4")<br>nickel plating), | C8 (ø8)/l 02 (Rc1/4)/N2 (N Si, Au, GE4F Straig Rear Straight: 72 c | N7 (Ø1/4") IPT1/4)/F2 (G1/4) Int: 48 g : 63 g (G1/4: 117 g) |  |  |  |  |
| Stand<br>Stand<br>Main  | Withstand volta Insulation resist Operating temp Operating humidards Piping Specification Piping entry dire materials of part Body Flow adjustmen Lead wire Bracket  | erature range dity range erature range dity range erature | -                          | Operat<br>Op<br>C4 (ø4).<br>01  | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored<br>(/C6 (ø6)<br>(Rc1/8)/N1 (N<br>KM, Stainless s<br>Straigh<br>Straigh | asured via me<br>Stored: –10 to<br>: 35 to 85% Rh<br>CE/UKCA mar<br>PT1/8)/F1 (G1<br>Straigh<br>steel 304, Bras<br>at: 40 g<br>: 55 g<br>: 75 g             | gohmmeter) be 60°C (No cone 1 (No condens king, UL (CSA) C6 (Ø6)/N /8) t, Rear s (Electroless is                     | etween termina<br>densation or fr<br>ation or freezi<br>)<br>N7 (Ø1/4")<br>nickel plating), | C8 (ø8)/l 02 (Rc1/4)/N2 (N Si, Au, GE4F Straig Rear Straight: 72 c | N7 (Ø1/4") IPT1/4)/F2 (G1/4) Int: 48 g : 63 g (G1/4: 117 g) |  |  |  |  |
| Stand<br>Stand<br>Main  | Withstand volta Insulation resist Operating temp Operating humidards Piping Specification Piping entry dire materials of part Body Flow adjustmen Lead wire  | ance erature range dity range ene-touch fitting crew-in (Rc, NPT, G) ection s in contact with fluid ene-touch fitting crew-in   |                            | Operat<br>Op<br>C4 (ø4).<br>01  | e (500 VDC me<br>ing: 0 to 50°C,<br>perating/Stored<br>(/C6 (ø6)<br>(Rc1/8)/N1 (N<br>KM, Stainless s<br>Straigh<br>Straigh | asured via me<br>Stored: –10 to<br>: 35 to 85% Rh<br>CE/UKCA mar<br>PT1/8)/F1 (G1<br>Straigh<br>steel 304, Bras<br>at: 40 g<br>: 55 g<br>: 75 g             | gohmmeter) be 60°C (No cone 1 (No condens king, UL (CSA) C6 (Ø6)/N /8) t, Rear s (Electroless i +3- 5 g 0 g 5 g      | etween termina<br>densation or fr<br>ation or freezi<br>)<br>N7 (Ø1/4")<br>nickel plating), | C8 (ø8)/l 02 (Rc1/4)/N2 (N Si, Au, GE4F Straig Rear Straight: 72 c | N7 (Ø1/4") IPT1/4)/F2 (G1/4) Int: 48 g : 63 g (G1/4: 117 g) |  |  |  |  |

### 2-Color Display Digital Flow Switch **PF2M7(-L)** Series

- \*1 Refer to the "Recommended pneumatic circuit examples" on page 2.
- \*2 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum access limit of the memory device is 3.7 million times. If the product is operated 24 hours per day, the product life will be as follows:
  - 5 min interval: life is calculated as 5 min x 3.7 million = 18.5 million min = 35 years
  - 2 min interval: life is calculated as 2 min x 3.7 million = 7.4 million min = 14 years
- \*3 Negative pressure indicates the pressure value on the IN side (inlet side).
- \*4 When multiple products are installed closely, the upper limit of the power supply voltage is 24 VDC.
- \*5 The accuracy value is based on dry air as a fluid. For other fluids, it is a reference value.
- \*6 Value when the digital filter is set at 0.05 s
- \*7 The time from when the instantaneous flow reaches the set value to when the switch output operates can be set.
- \*8 If the flow fluctuates around the set value, the hysteresis must be set to a value more than the fluctuating width. Otherwise, chattering will occur.
- \*9 When using a product with an analog output

- \*10 When selecting 0 to 10 V, refer to the analog output graph for the allowable load current.
- \*11 Standard condition (STD): 20 [°C], 101.3 [kPa] (Absolute pressure), 65 [% RH] (The flow rate given in the specifications is the value under standard conditions.)
  - Normal condition (NOR): 0 [°C], 101.3 [kPa] (Absolute pressure), 0 [% RH]
- \*12 Setting is only possible for models with the unit selection function.
- \*13 Power value is displayed for accumulated flow. The first 4 digits of the measurement value are always displayed.
- \*14 The time for the digital filter can be set to the sensor input. The response time indicates when the set value is 90% in relation to the step input.
- \*15 Check the precautions for One-touch fitting before use. When the piping condition is changed, for example due to piping on the back of the product, use a general purpose fitting (KQ□L series). Some piping conditions may have negative effects on the flow accuracy.
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

### **Communication Specifications (IO-Link mode)**

|                               | incations (iO-Link mode)  |                           |  |  |  |  |  |
|-------------------------------|---|---------------------------|--|--|--|--|--|
| IO-Link type                  | Device  |                           |  |  |  |  |  |
| IO-Link version               | V1.1  |                           |  |  |  |  |  |
| Communication speed           | COM   | //2 (38.4 kbps)           |  |  |  |  |  |
| Minimum cycle time            |   | 3.4 ms                    |  |  |  |  |  |
| Process data length           | Input data: 4 by  | ytes, Output data: 0 byte |  |  |  |  |  |
| On request data communication |   | Yes                       |  |  |  |  |  |
| Data storage function         |   | Yes                       |  |  |  |  |  |
| Event function                |   | Yes                       |  |  |  |  |  |
| Vendor ID                     | 13  | 1 (0 x 0083)              |  |  |  |  |  |
| Device ID                     | PF2M701-  -   -   -          : 0 x 00016D (365)         PF2M701-  - - - - -         : 0 x 00016E (366)         PF2M701-  - - - -         : 0 x 00017D (368)         PF2M702-  - - - -         : 0 x 000171 (369)         PF2M702-  - - - - -         : 0 x 000172 (370)         PF2M702-  - - - - -        : 0 x 000173 (371)         PF2M702-  - - - - - -        : 0 x 000174 (372)         PF2M705-  - - - - - - -        : 0 x 000175 (373)         PF2M705-  - - - - - - - -        : 0 x 000177 (375)         PF2M705-  - - - - - - - - -        : 0 x 000178 (376)         PF2M710-  - - - - - - - - - - - - - - - - - - | PF2M725L                  |  |  |  |  |  |




### Set Point Range and Rated Flow Range

#### Set the flow rate within the rated flow range.

The set point range is the range of flow rate that can be set in the switch.


The rated flow range is the range that satisfies the switch specifications (accuracy, linearity, etc.).


It is possible to set a value outside of the rated flow range if it is within the set point range, however, the satisfaction of specifications can not be guaranteed. The flow range if using CO<sub>2</sub> is given in brackets.

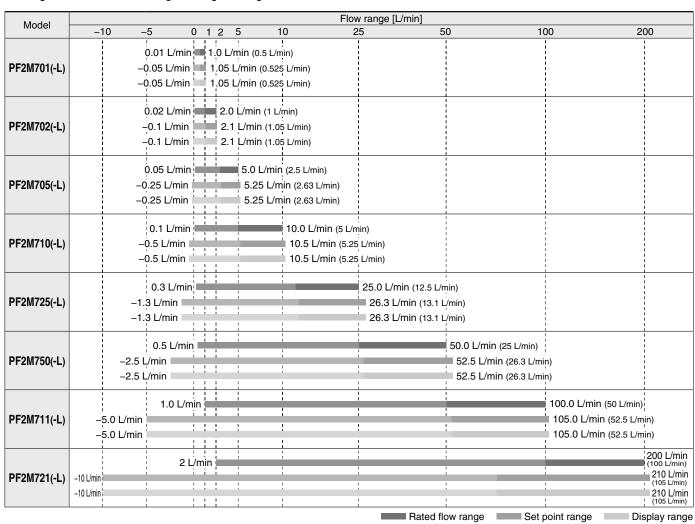

### Flow/Analog Output

|                              |      | E                                 |             |       |
|------------------------------|------|-----------------------------------|-------------|-------|
|                              | Α    | PF2M701/02/05<br>/10/50/11/21(-L) | PF2M725(-L) | С     |
| Voltage output (1 to 5 V)    | 1 V  | 1.04 V                            | 1.05 V      | 5 V   |
| Current output (4 to 20 mA)  | 4 mA | 4.16 mA                           | 4.19 mA     | 20 mA |
|                              |      | F                                 |             |       |
|                              | E    | PF2M701/02/05<br>/10/50/11/21(-L) | PF2M725(-L) | G     |
| Voltage output (0 to 10 V)*1 | 0 V  | 0.10 V                            | 0.12 V      | 10 V  |



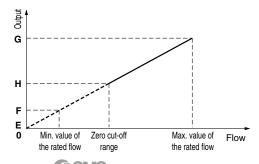



- \*1 The analog output current from the connected equipment should be 20 µA or less when selecting 0 to 10 V.
  - When 20 µA or more current flows, it is possible that the accuracy is not satisfied at less than or equal to 0.5 V.
- D or H fluctuates depending on the setting of the zero cut-off function.


When the zero cut-off function is set to "0," the flow rate display value starts from 0 L/min., but in conditions other than horizontal installation and supply pressure of 0.35 MPa, the output may not be 0 L/min.


### 2-Color Display Digital Flow Switch **PF2M7(-L)** Series


### Pressure Loss (Reference Data): Without Flow Adjustment Valve

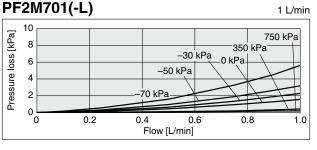


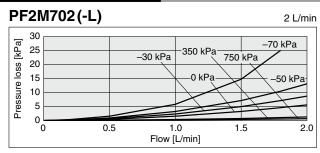


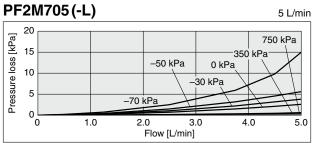


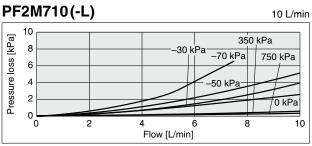

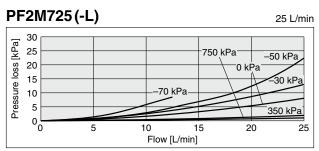


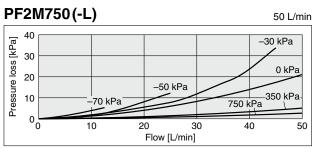


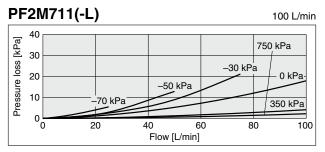


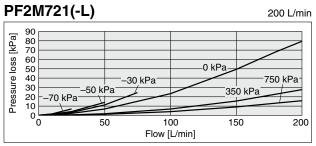



### Flow Rate Characteristics (Reference Data)

















### Flow Rate Characteristics at Negative Pressure (Reference Data)


When the PF2M series is used with negative pressure (-70 to 0 kPa), the measurable range (warranty range of the specifications including pressure characteristics) varies depending on the flow range.


Select the flow range referring to the graph below.




















### 2-Color Display Digital Flow Switch **PF2M7(-L)** Series


### Internal Circuits and Wiring Examples

### NPN + NPN output type **PF2M7** ----**A**---

Brown DC (+) Black OUT1 - Pag 12 to 24 VDC White OUT2 Blue DC (-)


Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1 V or less

### PNP + PNP output type **PF2M7** -------

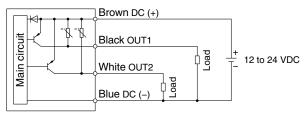

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

### NPN + Analog output type

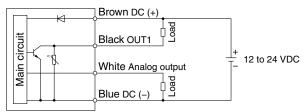

Max. applied voltage: 28 V, Max. load current: 80 mA,


Internal voltage drop: 1 V or less

C: Analog output: 1 to 5 V or 0 to 10 V can be selected. Output impedance: 1 k $\Omega$ 

D: Analog output: 4 to 20 mA Load impedance: 50 to 600  $\Omega$ 

### PNP + Analog output type

PF2M7

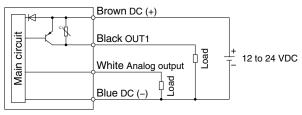


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

E: Analog output: 1 to 5 V or 0 to 10 V can be selected.

Output impedance: 1 k $\Omega$ F: Analog output: 4 to 20 mA Load impedance: 50 to 600  $\Omega$ 

Load


### Accumulated pulse output wiring examples




PF2M7

NPN + Analog output type **PF2M7** \_\_-\_-**C**\_-\_\_\_

**PF2M7**--------






PNP + PNP output type PF2M7

PNP + Analog output type **PF2M7** ----**E**----**PF2M7**------








### **Internal Circuits and Wiring Examples**

### **PF2M7** -------**NPN** output type


### Brown DC (+) Black OUT1



Max. applied voltage: 30 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less


### **PF2M7**------

### NPN 2 output type

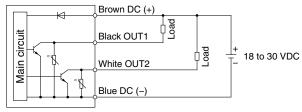

Max. applied voltage: 30 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less


### NPN + External input type

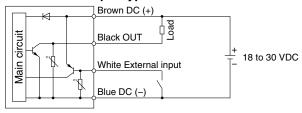

Max. applied voltage: 30 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

#### **PF2M7** - - - **L3/4** - - - -

### L3: NPN + Analog voltage output type L4: NPN + Analog current output type

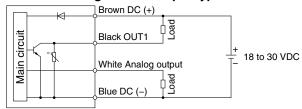

Max. applied voltage: 30 V, Max. load current: 80 mA,


Internal voltage drop: 1.5 V or less

L3: Analog output: 1 to 5 V or 0 to 10 V can be selected.


Output impedance: 1 k $\Omega$ L4: Analog output: 4 to 20 mA Load impedance: 50 to 600  $\boldsymbol{\Omega}$ 

#### When used as an IO-Link device

17




### PNP output type

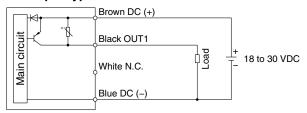


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

### PNP 2 output type

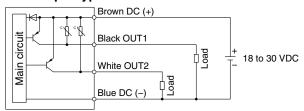


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

### PNP + External input type

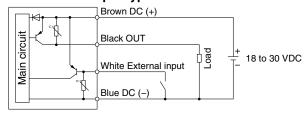

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

### L3: PNP + Analog voltage output type L4: PNP + Analog current output type

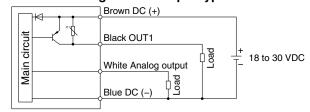


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

L3: Analog output: 1 to 5 V or 0 to 10 V can be selected. Output impedance: 1 k $\Omega$ 

L4: Analog output: 4 to 20 mA Load impedance: 50 to 600  $\Omega$ 

### **Construction: Parts in Contact with Fluid**

### PF2M701/702/705/710/725/750/711(-L)

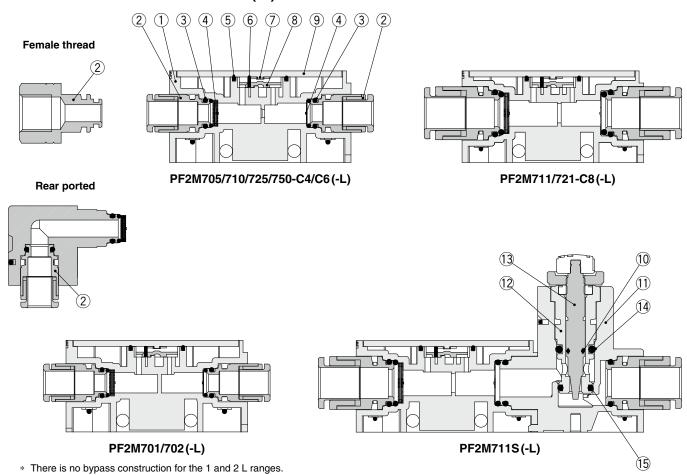


### **Component Parts**


| No. | Description                | Material            | Note                       |
|-----|----------------------------|---------------------|----------------------------|
| 1   | Body                       | PPS                 |                            |
| 2   | Fitting for piping         | Brass               | Electroless nickel plating |
| 3   | O-ring                     | FKM                 |                            |
| 4   | Flow rectifier             | Stainless steel 304 |                            |
| 5   | Seal                       | FKM                 |                            |
| 6   | Flow rectifier             | Stainless steel 304 |                            |
| 7   | Sensor chip                | Silicon             |                            |
| 8   | Body B                     | PPS                 |                            |
| 9   | Printed circuit board      | GE4F                |                            |
| 10  | O-ring                     | FKM                 | Fluoro coating             |
| 11  | Flow adjustment valve body | PBT                 |                            |
| 12  | Body                       | Brass               | Electroless nickel plating |
| 13  | Needle                     | Brass               | Electroless nickel plating |
| 14  | O-ring                     | FKM                 | Fluoro coating             |
| 15  | O-ring                     | FKM                 | Fluoro coating             |

### **Dimensions**


### PF2M7□-C4/C6/C8/N7(-L)

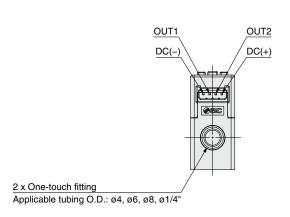


|  |      | [mm]           |
|--|------|----------------|
| Model                                  | Α    | P              |
| PF2M701/702/705/710<br>-C4(-L)         | 59.1 | ø2.8 depth 8.4 |
| PF2M701/702/705/710/<br>725/750-C6(-L) | 59.9 | ø2.8 depth 8.4 |
| PF2M725/750-N7(-L)                     | 67.5 | ø2.8 depth 8.4 |
| PF2M711/721-C8(-L)                     | 68   | ø2.8 depth 6.2 |
| PF2M711/721-N7(-L)                     | 64.6 | ø2.8 depth 6.2 |

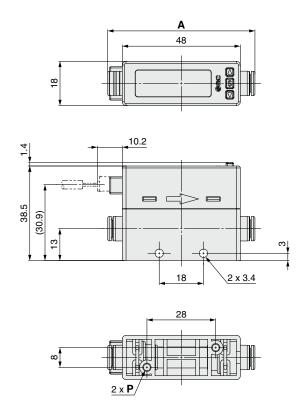

### PF2M7 L-C4/C6/C8/N7(-L)

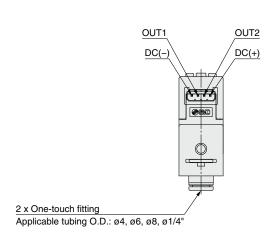

|   |      |      | [mm]           |
|---|------|------|----------------|
| Model                                   | Α    | С    | Р              |
| PF2M701/702/705/710L<br>-C4(-L)         | 84.4 | 7.6  | ø2.8 depth 8.4 |
| PF2M701/702/705/710/<br>725/750L-C6(-L) | 84.4 | 8    | ø2.8 depth 8.4 |
| PF2M725/750L-N7(-L)                     | 84.4 | 11.8 | ø2.8 depth 8.4 |
| PF2M711/721L-C8(-L)                     | 88   | 12   | ø2.8 depth 6.2 |
| PF2M711/721L-N7(-L)                     | 88   | 10.3 | ø2.8 depth 6.2 |

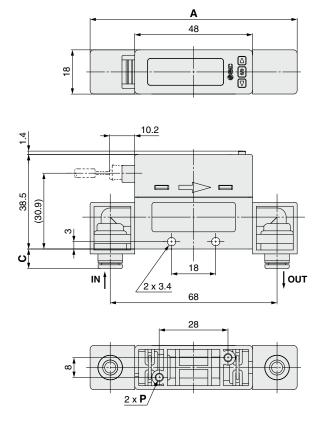





### 2-Color Display Digital Flow Switch **PF2M7(-L)** Series


### **Dimensions**


### **PF2M7**□-□1/2(-L)




|  |    |    | [mm]           |
|--|----|----|----------------|
| Model                                  | Α  | В  | Р              |
| PF2M701/702/705/710/<br>725/750-01(-L) | 66 | 14 | ø2.8 depth 8.4 |
| PF2M701/702/705/710/<br>725/750-N1(-L) | 68 | 14 | ø2.8 depth 8.4 |
| PF2M701/702/705/710/<br>725/750-F1(-L) | 70 | 14 | ø2.8 depth 8.4 |
| PF2M711/721-02(-L)                     | 70 | 17 | ø2.8 depth 6.2 |
| PF2M711/721-N2(-L)                     | 70 | 17 | ø2.8 depth 6.2 |
| PF2M711/721-F2(-L)                     | 78 | 21 | ø2.8 depth 6.2 |

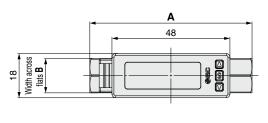

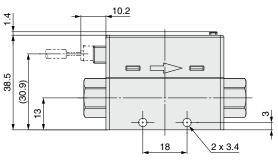


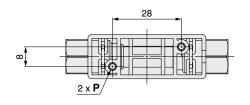



### **PF2M**□**L**-□1/2(-**L**)



|   |      |    |    | [mm]           |
|---|------|----|----|----------------|
| Model                                   | Α    | С  | В  | P              |
| PF2M701/702/705/710/<br>725/750L-01(-L) | 84.4 | 11 | 14 | ø2.8 depth 8.4 |
| PF2M701/702/705/710/<br>725/750L-N1(-L) | 84.4 | 12 | 14 | ø2.8 depth 8.4 |
| PF2M701/702/705/710/<br>725/750L-F1(-L) | 84.4 | 13 | 14 | ø2.8 depth 8.4 |
| PF2M711/721L-02(-L)                     | 88   | 13 | 17 | ø2.8 depth 6.2 |
| PF2M711/721L-N2(-L)                     | 88   | 13 | 17 | ø2.8 depth 6.2 |
| PF2M711/721L-F2(-L)                     | 88   | 17 | 21 | ø2.8 depth 6.2 |

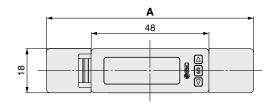


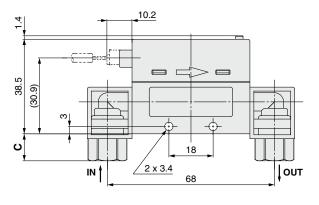








### **Dimensions**

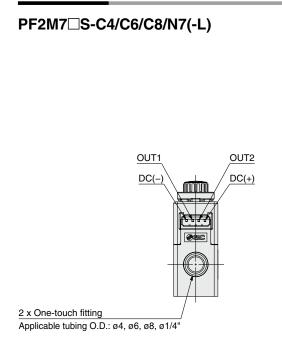

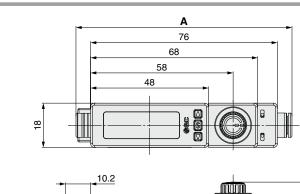

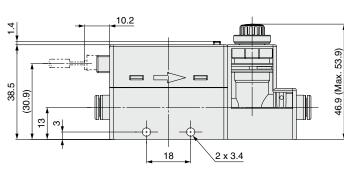


[mm] Model Α PF2M705/710S-C4(-L) 87.1 ø2.8 depth 8.4 ø2.5 depth 6 PF2M705/710/725/750S 87.9 ø2.8 depth 8.4 ø2.5 depth 6 -C6(-L) PF2M725/750S-N7(-L) 95.5 ø2.8 depth 8.4 ø2.5 depth 6 PF2M711/721S-C8(-L) 96 ø2.8 depth 6.2 ø2.5 depth 5 PF2M711/721S-N7(-L) 92.6 ø2.8 depth 6.2 ø2.5 depth 5

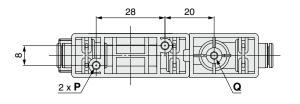


46.9 (Max. 53.9)

OUT

### PF2M7 W-C4/C6/C8/N7(-L)

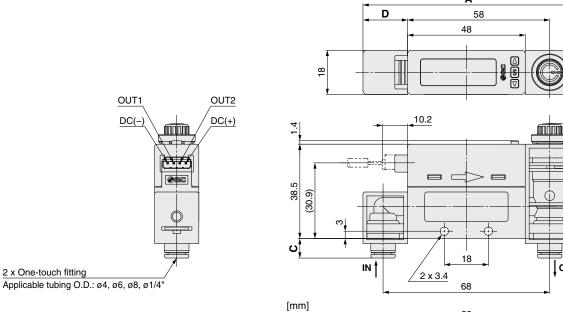

|                                 |      |      |      | [mm]           |
|---------------------------------|------|------|------|----------------|
| Model                           | Α    | С    | D    | Р              |
| PF2M705/710W-C4(-L)             | 86.2 | 7.6  | 18.2 | ø2.8 depth 8.4 |
| PF2M705/710/725/750W<br>-C6(-L) | 86.2 | 8    | 18.2 | ø2.8 depth 8.4 |
| PF2M725/750W-N7(-L)             | 86.2 | 11.8 | 18.2 | ø2.8 depth 8.4 |
| PF2M711/721W-C8(-L)             | 88   | 12   | 20   | ø2.8 depth 6.2 |
| PF2M711/721W-N7(-L)             | 88   | 10.3 | 20   | ø2.8 depth 6.2 |





### 2-Color Display Digital Flow Switch **PF2M7(-L)** Series

### **Dimensions**


PF2M711/721W-F2(-L)


88

17

20

21

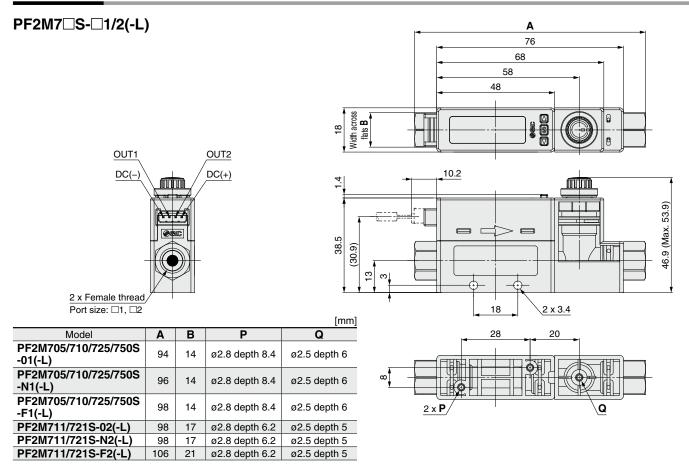

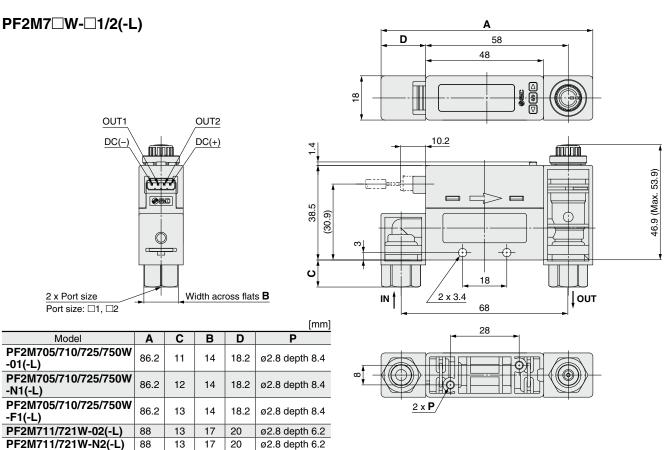


ø2.8 depth 6.2


### **Dimensions**

### PF2M701/702/705/710/725/750/711/721(-L)


### Panel mounting/Without flow adjustment valve/Straight

### With bracket/Without flow adjustment valve

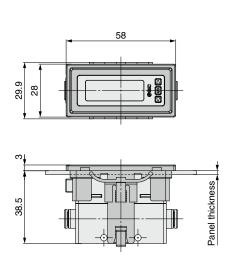





### Panel mount adapter/Without flow adjustment valve



|                                    | [mm] |
|------------------------------------|------|
| Model                              | Α    |
| PF2M701/702/705/710/725/750L-□(-L) | 84.4 |
| PF2M711/721L-□(-L)                 | 88   |



### **Panel Fitting Dimensions**

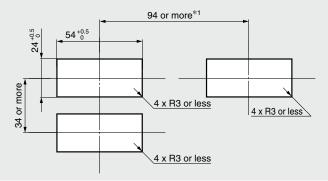

Panel thickness 1 to 3.2 mm

\*1 This is the minimum value when the rear ported type is selected for the piping entry direction. For the straight type, please design the layout with consideration to the piping material and tubing length. If a bend (R) is used, limit it to R3 or less.




### **Dimensions**

### PF2M705/710/725/750/711/721(-L)


### Panel mounting/With flow adjustment valve/Straight

# 


### With bracket/With flow adjustment valve

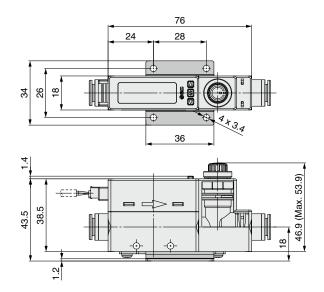


### Panel mount adapter/With flow adjustment valve



|                            | [mm] |
|----------------------------|------|
| Model                      | Α    |
| PF2M705/710/725/750W-□(-L) | 91.2 |
| PF2M711/721W-□(-L)         | 93   |

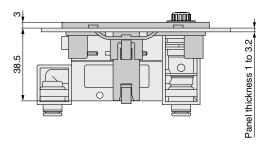

### **Panel Fitting Dimensions**

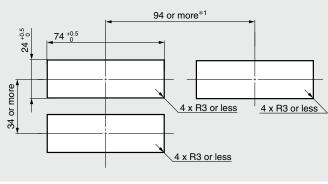

Panel thickness 1 to 3.2 mm

<sup>\*1</sup> This is the minimum value when the rear ported type is selected for the piping entry direction. For the straight type, please design the layout with consideration to the piping material and tubing length. If a bend (R) is used, limit it to R3 or less.





### **Dimensions**

### PF2M701/702/705/710/725/750/711/721(-L)

### DIN rail mounting bracket


### **ZS-33-R**□

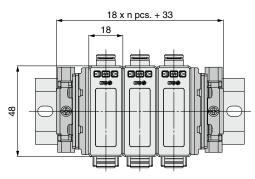

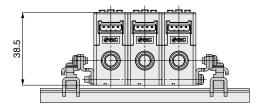

### DIN rail AXT100-DR-□


 $\ast\;$  For  $\Box,$  enter a number from the No. line in the table below.

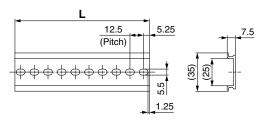

L Dimensions [mm]

| <br> |    |      |    |      |    |      |    |       |     |       |     |       |     |       |     |       |     |       |     |       |
|------|----|------|----|------|----|------|----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| No.  | 1  | 2    | 3  | 4    | 5  | 6    | 7  | 8     | 9   | 10    | 11  | 12    | 13  | 14    | 15  | 16    | 17  | 18    | 19  | 20    |
| L    | 23 | 35.5 | 48 | 60.5 | 73 | 85.5 | 98 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 |

### Lead wire with connector ZS-33-D

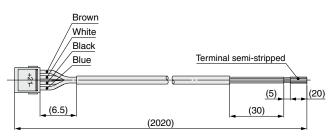

### **Cable Specifications**

| Conductor           | Nominal cross section | AWG 26                    |  |  |
|---------------------|-----------------------|---------------------------|--|--|
| Conductor           | Outside diameter      | Approx. 0.50 mm           |  |  |
| Insulator           | Outside diameter      | Approx. 1.00 mm           |  |  |
| insulator           | Color                 | Brown, White, Black, Blue |  |  |
| Sheath Material     |                       | Oil-resistant PVC         |  |  |
| Finished outside of | liameter              | ø3.5                      |  |  |

<sup>\*</sup> For wiring, refer to the Operation Manual from the SMC website Documents/Download --> Instruction Manuals.



### **PF2M7-L** Series **IO-Link** Compatible Products

### **Made to Order**

Please contact SMC for detailed specifications, delivery times, and prices.



### **Symbol**

### Compatible with Argon (Ar) and Carbon Dioxide (CO2) Mixed Gas

X731

The argon–carbon dioxide gas ratio  $(Ar:CO_2)$  can be selected using the push-buttons from among the following: 92:8, 90:10, 80:20, 70:30, 60:40, 40:60, and 30:70. The dimensions are the same as those of the standard model.

| PF2M 7               |        |                  |  |  |  |  |  |  |
|----------------------|--------|------------------|--|--|--|--|--|--|
| Output specification |        |                  |  |  |  |  |  |  |
| 7 Integrated display | Symbol | OUT1             | OUT2   |  |  |  |  |  |
|                      | L      | IO-Link/NPN/PNP  | _  |  |  |  |  |  |
|                      | L2     | IO-Link/NPN/PNP  | NPN/PNP/External input                             |  |  |  |  |  |
|                      | L3     | IO-Link/NPN/PNP  | Analog 1 to 5 V $\Leftrightarrow$ Analog 0 to 10 V |  |  |  |  |  |
|                      | L4     | IO-I ink/NPN/PNP | Analog 4 to 20 mA                                  |  |  |  |  |  |

For "How to Order," refer to page 10.

<sup>\*</sup> Only applicable to the IO-Link output specification

| Marala I | Gas | ratio           | Detect "             | Diaminu/Oni i           | Max. anal           | og output      |  |
|----------|-----|-----------------|----------------------|-------------------------|---------------------|----------------|--|
| Model    | Ar  | CO <sub>2</sub> | Rated flow range     | Display/Set point range | Voltage (Vmax)      | Current (Imax) |  |
|          | 92% | 8%              |                      |                         |                     | . ,            |  |
|          | 90% | 10%             |                      |                         |                     |                |  |
|          | 80% | 20%             | 0.01 to 1 L/min      | -0.05 to 1.05 L/min     | 5 V                 | 20 mA          |  |
| PF2M701  | 70% | 30%             |                      |                         |                     |                |  |
|          | 60% | 40%             |                      |                         |                     |                |  |
|          | 40% | 60%             | 0.01 to 0.6 L/min    | -0.03 to 0.63 L/min     | 5 V                 | 20 mA          |  |
|          | 30% | 70%             | 0.01 10 0.6 [/111111 | -0.03 to 0.63 L/IIIII   | o v                 | 20 IIIA        |  |
|          | 92% | 8%              |                      |                         |                     |                |  |
|          | 90% | 10%             |                      |                         |                     |                |  |
|          | 80% | 20%             | 0.02 to 2 L/min      | -0.1 to 2.1 L/min       | 5 V                 | 20 mA          |  |
| PF2M702  | 70% | 30%             |                      |                         |                     |                |  |
|          | 60% | 40%             |                      |                         |                     |                |  |
|          | 40% | 60%             | 0.00 to 4.01 /orio   | 0.00 to 4.00 l /orio    | F.\/                | 00 4           |  |
|          | 30% | 70%             | 0.02 to 1.2 L/min    | -0.06 to 1.26 L/min     | 5 V                 | 20 mA          |  |
|          | 92% | 8%              |                      |                         |                     |                |  |
|          | 90% | 10%             | 1                    |                         |                     |                |  |
|          | 80% | 20%             | 0.05 to 5 L/min      | -0.25 to 5.25 L/min     | 5 V                 | 20 mA          |  |
| PF2M705  | 70% | 30%             | 0.00 to 0 2711111    |                         |                     |                |  |
|          | 60% | 40%             |                      |                         |                     |                |  |
|          | 40% | 60%             |                      |                         |                     |                |  |
|          | 30% | 70%             | 0.05 to 3 L/min      | -0.15 to 3.15 L/min     | 5 V                 | 20 mA          |  |
|          | 92% | 8%              | 0.1 to 10 L/min      | -0.5 to 10.5 L/min      |                     |                |  |
|          | 90% | 10%             |                      |                         |                     |                |  |
|          | 80% | 20%             |                      |                         | 5 V                 | 20 mA          |  |
| PF2M710  | 70% | 30%             |                      |                         |                     |                |  |
|          | 60% | 40%             |                      |                         |                     |                |  |
|          | 40% | 60%             |                      | 0.04-0.01/min           | <b>5</b> \ <b>7</b> | 00.4           |  |
|          | 30% | 70%             | 0.1 to 6 L/min       | -0.3 to 6.3 L/min       | 5 V                 | 20 mA          |  |
|          | 92% | 8%              |                      | -1.3 to 26.3 L/min      |                     |                |  |
|          | 90% | 10%             | 0.3 to 25 L/min      |                         | 5 V                 | 20 mA          |  |
|          | 80% | 20%             |                      |                         |                     |                |  |
| PF2M725  | 70% | 30%             |                      |                         |                     |                |  |
|          | 60% | 40%             |                      |                         |                     |                |  |
|          | 40% | 60%             |                      |                         |                     |                |  |
|          | 30% | 70%             | 0.3 to 15 L/min      | -0.8 to 15.8 L/min      | 5 V                 | 20 mA          |  |
|          | 92% | 8%              |                      |                         |                     |                |  |
|          | 90% | 10%             |                      |                         |                     |                |  |
|          | 80% | 20%             | 0.5 to 50 L/min      | -2.5 to 52.5 L/min      | 5 V                 | 20 mA          |  |
| PF2M750  | 70% | 30%             |                      |                         | -                   | -              |  |
|          | 60% | 40%             |                      |                         |                     |                |  |
|          | 40% | 60%             |                      |                         |                     | :              |  |
|          | 30% | 70%             | 0.5 to 30 L/min      | -1.5 to 31.5 L/min      | 5 V                 | 20 mA          |  |
|          | 92% | 8%              |                      |                         |                     |                |  |
|          | 90% | 10%             |                      |                         |                     |                |  |
|          | 80% | 20%             | 1 to 100 L/min       | -5 to 105 L/min         | 5 V                 | 20 mA          |  |
| PF2M711  | 70% | 30%             |                      |                         | ÷ •                 |                |  |
| =        | 60% | 40%             |                      |                         |                     |                |  |
|          | 40% | 60%             |                      |                         |                     |                |  |
|          | 30% | 70%             | 1 to 60 L/min        | -3 to 63 L/min          | 5 V                 | 20 mA          |  |

<sup>\*</sup> When changing the max. analog output, use the analog free span function on page 28.



# PF2M7(-L) Series Function Details

For the setting of functions and operation methods, refer to the "Operation Manual" on the SMC website Documents/Download --> Instruction Manuals.

#### ■ Output operation

The output operation can be selected from the following:

Output corresponding to instantaneous flow (Hysteresis mode, Window comparator mode)

- · Hysteresis mode is the mode where the switch output will turn ON when the flow is greater than the set value, and will turn OFF when the flow falls below the set value by the amount of hysteresis or more.
- · Window comparator mode is the mode where an operating mode in which the switch output is turned on and off depending on whether the flow is inside or outside the range of two set values.

Output corresponding to accumulated flow (Accumulated output mode, Accumulated pulse output mode)

- · In accumulated output mode, the switch output will start at the set accumulated flow rate value.
- · Accumulated pulse output is a pulse signal which is output every time a predefined accumulated flow has passed.

Others (Error output, Switch output OFF)

- The error output function outputs the switch output when an error is displayed.
- · The switch output off function turns off the switch output.
- \* Default setting: Hysteresis mode, Normal output

#### ■ Simple setting mode

Only the set values for instantaneous flow and accumulated flow can be changed. The output mode, output type, display color, and accumulated pulse output cannot be changed.

#### ■ Display color

The display color can be selected for each output status. The selection of the display color provides visual identification of abnormal values.

| Green for ON, Red for OFF |
|---------------------------|
| Red for ON, Green for OFF |
| Red all the time          |
| Green all the time        |

### ■ Reference condition

The display unit can be selected from standard condition or normal condition.

Standard condition: Flow rate converted to a volume at 20°C, 101.3 kPa (absolute pressure), and 65% RH Normal condition: Flow rate converted to a volume at 0°C, 101.3 kPa (absolute pressure), and 0% RH

#### ■ Delay time setting

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set. Setting the delay time can prevent the switch output from chattering.

The total switching time is the switch operation time and the set delay time. (Default setting: 0 s)

| 0 to 0.10 s (Increments of 0.01 s) |
|------------------------------------|
| 0.1 to 1.0 s (Increments of 0.1 s) |
| 1 to 10 s (Increments of 1 s)      |
| 20 s                               |
| 30 s                               |
| 40 s                               |
| 50 s                               |
| 60 s                               |

### ■ Digital filter setting

The time for the digital filter can be set to the sensor input. Setting the digital filter can reduce chattering of the switch output and flickering of the analog output and the display.

| 0.1 s |
|-------|
| 0.5 s |
| 1 s   |
| 2 s   |
| 5 s   |

0.05 s

The response time indicates when the set value is 90% in relation to the step input.

(Default setting: 1 s)

#### ■ Selectable analog output function

1 to 5 V or 0 to 10 V can be selected for the analog voltage output type. (Default setting: 1 to 5 V)

#### ■ Forced output function

The output is forced ON/OFF when starting the system or during maintenance. This enables the confirmation of wiring and prevents system errors due to unexpected output.

For the analog output type: When ON, the output will be 5 V (or 10 V when 0 to 10 V is selected) or 20 mA, and when OFF, 1 V (or 0 V when 0 to 10 V is selected) or 4 mA.

\* Also, an increase or decrease of the flow will not change the ON/OFF status of the output while the forced output function is activated.

#### ■ Accumulated value hold

The accumulated value will be stored even if the power supply is turned OFF. The accumulated value is memorized every 2 or 5 minutes during measurement and continues from the last memorized value when the power supply is turned ON again.

The max. writable limit of the memory device is 3.7 million times, which should be taken into consideration.

#### ■ Peak/Bottom value display

The max. (min.) flow rate is detected and updated from when the power supply is turned ON. In peak (bottom) value display mode, this max. (min.) flow rate is displayed.

### **■** Display OFF mode

This function will turn the display OFF. In this mode, "\_\_\_" will flash on the main screen. If any button is pressed during this mode, the display reverts to normal for 30 seconds to allow the flow, etc., to be quickly checked.

#### ■ Setting of a security code

The user can select whether a security code must be entered to release the key lock. At the time of shipment from the factory, it is set such that a security code is not required.

### ■ Key-lock function


Prevents operation errors such as accidentally changing setting values

#### ■ Reset to the default settings

The product can be returned to its factory default settings.

### ■ Reversible display mode

When the switch is used upside down, the orientation of the display can be rotated to make it easier to read by using the reversible display function.



#### ■ Zero cut-off function

When the flow is close to 0 L/min, the product will round the value down and zero will be displayed. A flow value may be displayed even when the flow rate is 0 L/min due to high pressure or depending on the installation. The zero cut-off function will force the display to zero.

### ■ Zero-clear function


The measured flow rate indication can be adjusted to zero. The adjustment range is  $\pm 5\%$  F.S. of the initial factory setting.




### Function Details **PF2M7(-L)** Series

### ■ Analog free span function

This function allows a flow that generates an output of 5 V (or 10 V when 0 to 10 V is selected) or 20 mA to be changed. The value can be changed between 10% of the max. value of the rated flow and the max. value of the display range.

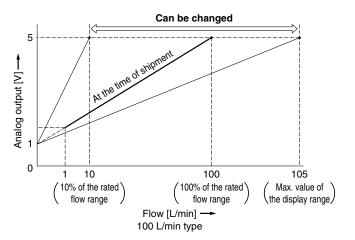

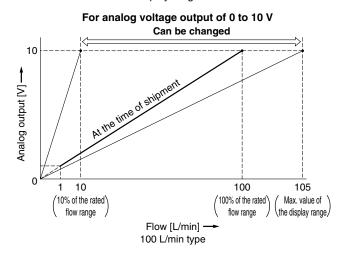

### **■** Error display function


When an error or abnormality arises, the location and contents are displayed.


| Display   | Error name                  | Description   | Action   |  |
|---|-----------------------------|---|--|--|
| Er 1  | OUT1 over current error     | The switch output (OUT1) load current of 80 mA or more flows.   | Turn the power OFF and remove the cause of the                     |  |
| Er 2  | OUT2 over current error     | The switch output (OUT2) load current of 80 mA or more flows.   | over current. Then turn the power ON again.                        |  |
| XXX   | Instantaneous flow error    | The flow has exceeded the upper limit of the flow display range.  | Decrease the flow rate.  |  |
| LLL   | instantaneous now entor     | The flow has exceeded the lower limit of the flow display range.  | Change the flow to the correct direction.                          |  |
| 2999 *** =<br>Accumulated flow is displayed. (Flashing)         | Accumulated flow error*1    | The accumulated flow has exceeded the accumulated flow range. (For accumulated increment) (The decimal point position varies depending on the flow range or measurement unit setting.)    | Reset the accumulated flow.  |  |
| Accumulated flow is displayed. (Flashing)                       | Accumulated flow error      | The accumulated flow has reached the set accumulated flow value. (For accumulated decrement) (The decimal point position varies depending on the flow range or measurement unit setting.) | (Press the SET and DOWN buttons simultaneously for 1 s or longer.) |  |
| Er 3  | Outside of zero-clear range | During zero-clear operation, the flow rate of $\pm 5\%$ F.S. or more is applied. (The mode is returned to measurement mode after 1 s.)  | Retry the zero-clear operation without applying fluid.             |  |
| Er 0<br>Er 4<br>Er 6<br>Er 7<br>Er 8<br>Er 14<br>Er 16<br>Er 40 | System error                | An internal data error has occurred.  | Turn the power OFF and turn it ON again.                           |  |
| Er 15   | Version does not match*2    | The IO-Link version does not match that of the master. The master uses version 1.0.   | Ensure that the master IO-Link version matches the device version. |  |

- \*1 A decimal point will be displayed depending on the flow range or measurement unit setting.
- \*2 Only for the IO-Link compatible products
- \* If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.

### ■ Unit display function

The unit displayed on the screen differs depending on the unit setting in measurement mode.



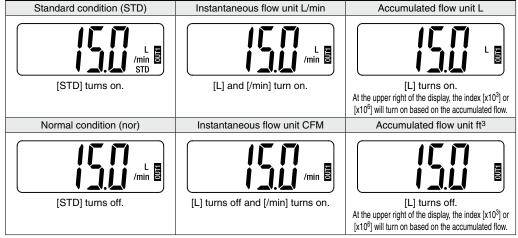



### 3-Screen Display

### **Digital Flow Monitor**

# PFG300 Series



### **How to Order**



Operation manual | Calibration certificate

0 0

0

None

### PFG 3 0 0 - RT - M - I 3 Remote type monitor unit

### Input specification

| Symbol | Description   | Applicable flow switch model |
|--------|---------------|------------------------------|
| 0      | Voltage input | PF2M7□-C/E series            |
| 1      | Current input | PF2M7□-D/F series            |

### Output specification •

| RT | 2 outputs (NPN/PNP switching type)<br>+ Analog voltage output*1, 2 |
|----|--|
| sv | 2 outputs (NPN/PNP switching type)<br>+ Analog current output*2    |
| ΧY | 2 outputs (NPN/PNP switching type)<br>+ Copy function              |

- \*1 Can switch between 1 to 5 V and 0 to 10 V
- \*2 Can be switched to external input or copy function

### Unit specification

| Nil | Units selection function*3 |  |  |  |  |
|-----|----------------------------|--|--|--|--|
| M   | SI unit only*4             |  |  |  |  |

- \*3 This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)
- \*4 Fixed unit: Instantaneous flow: L/min Accumulated flow: L

### Option 1

| Optio      | n 2                                 |             |          |  |  |
|------------|-------------------------------------|-------------|----------|--|--|
| Symbol     |                                     | Description |          |  |  |
| Nil        | None                                |             |          |  |  |
| <b>A</b> 1 | Bracket A<br>(Vertical<br>mounting) |             | ZS-46-A1 |  |  |
|            |                                     |             | ZS-46-A2 |  |  |

Option 4

Nil

K


ZS-28-C-1

connector


Option 3 Nil

| <b>A2</b> | Bracket B<br>(Horizontal<br>mounting) |
|-----------|---------------------------------------|





Panel mount D adapter + Front protection cover




| Symbol | Description  |  |  |  |  |  |
|--------|--|--|--|--|--|--|
| Nil    | Without lead wire  |  |  |  |  |  |
| L      | Power supply/output<br>connection lead wire<br>(Lead wire length: 2 m) | Power supply/output connection lead wire |  |  |  |  |

### Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

| Part no.  | Option                                       | Note   |
|-----------|--|--|
| ZS-28-C-1 | Sensor connector                             | For PFMB                                     |
| ZS-46-A1  | Bracket A                                    | Tapping screw: Nominal size 3 x 8 L (2 pcs.) |
| ZS-46-A2  | Bracket B                                    | Tapping screw: Nominal size 3 x 8 L (2 pcs.) |
| ZS-46-B   | Panel mount adapter                          |  |
| ZS-46-D   | Panel mount adapter + Front protection cover |  |
| ZS-46-5L  | Power supply/output connection lead wire     | 5-core, 2 m                                  |
| ZS-27-01  | Front protection cover                       |  |

### **Connection Example**

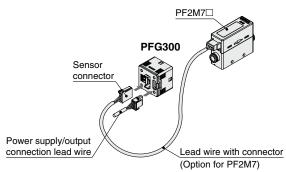

### **Specifications**

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website. Click here for details.

|                  | Model                                    |                    |   |                       |                     | PFG30                | 00 series            |                    |                       |                     |
|------------------|--|--------------------|---|-----------------------|---------------------|----------------------|----------------------|--------------------|-----------------------|---------------------|
| Applicable SMC   |  |                    | PF2M701   PF2M702   PF2M705   PF2M710   PF2M725   PF2M750   PF2M711   PF2M721   |                       |                     |                      |                      |                    |                       |                     |
| flow switch      | Rated flow rang                          | <b>a</b> *1        |   |                       |                     |                      | 0.3 to 25 L/min      |                    |                       |                     |
| non onnon        | Traced now rang                          | Instantaneous flow |   |                       |                     |                      | -1.3 to 26.3 L/min   |                    |                       |                     |
|                  | Set point range                          | Accumulated flow   | 0.00 to 1.00 Emili  | 0 to 99,999.          |                     | 0.0 10 10.0 10111111 | 1.0 to 20.0 E111111  |                    | 9,999,999 L           | 10 10 2 10 2 11111  |
|                  | Con allo at a attachia                   | Instantaneous flow |   |                       |                     |                      |                      | 0.1 L/min          | 3,333,333 L           | 1 L/min             |
| Flow             | Smallest settable increment              | Accumulated flow   | 0.01 L/min 0.1 L/min 1 L/min 1 L  |                       |                     |                      | I L/IIIIII           |                    |                       |                     |
| FIOW             |  |                    |   | 0.                    | I L                 |                      |                      |                    |                       |                     |
|                  | Accumulated volum<br>(Pulse width = 50 m |                    | 0.1 L/pulse 1 L/pulse   |                       |                     |                      | oulse                |                    |                       |                     |
|                  | Accumulated value ho                     | ,                  | Intervals of 2 or 5 minutes can be selected. The stored accumulated flow is held even when the power supply is OFF.                   |                       |                     |                      |                      |                    |                       |                     |
|                  |  |                    | intervals of 2  | or 5 minutes ca       | in be selected.     |                      |                      | is field ever wi   | ien me power s        | supply is OFF.      |
| Electrical       | Power supply voltage                     |                    | 12 to 24 VDC ±10%<br>25 mA or less  |                       |                     |                      |                      |                    |                       |                     |
| Electrical       | Current consumption                      |                    |   |                       |                     |                      |                      |                    |                       |                     |
|                  | Protection                               |                    | Polarity protection ±0.5% F.S. ± Minimum display unit (Ambient temperature of 25°C)   |                       |                     |                      |                      |                    |                       |                     |
|                  | Display accurac                          | -                  | ±0.5% F.S. (Ambient temperature of 25°C)  |                       |                     |                      |                      |                    |                       |                     |
| Accuracy         | Analog output a                          | ccuracy            |   |                       |                     |                      |                      |                    |                       |                     |
| •                | Repeatability                            |                    | ±0.1% F.S. ±1 digit<br>±0.5% F.S. (Ambient temperature: 0 to 50°C, 25°C standard)   |                       |                     |                      |                      |                    |                       |                     |
|                  | Temperature char                         | acteristics        |   | ±0.9                  |                     |                      |                      |                    | ard)                  | -                   |
|                  | Output type                              |                    |   |                       |                     |                      | P open collec        | •                  |                       |                     |
|                  | Output mode                              |                    | Select  | from Hystere          |                     |                      | Accumulated of       |                    | ulated pulse          | output,             |
|                  | · .                                      |                    |   |                       |                     | <u> </u>             | h output OFF         |                    |                       |                     |
|                  | Switch operation                         |                    |   |                       | Select              |                      | or Reversed          | output.            |                       |                     |
|                  | Max. load curre                          |                    |   |                       |                     |                      | mA                   |                    |                       |                     |
| Switch output    | Max. applied voltage                     |                    |   |                       |                     |                      | VDC                  |                    |                       |                     |
|                  | Internal voltage drop (Re                | esidual voltage)   | NPN outpu   | t: 1 V or less        | (at load curre      | nt of 80 mA),        | PNP output:          | 1.5 V or less (    | at load currer        | nt of 80 mA)        |
|                  | Response time*                           | :2                 |   |                       |                     | 3 ms                 | or less              |                    |                       |                     |
|                  | Delay time*2                             |                    | Select from 0.00  | , 0.05 to 0.1 s (inci | rement of 0.01 s),  | 0.1 to 1.0 s (increr | ment of 0.1 s), 1 to | 10 s (increment o  | f 1 s), 20 s, 30 s, 4 | 10 s, 50 s, or 60 s |
|                  | Hysteresis*4                             |                    | Variable from 0   |                       |                     |                      |                      |                    |                       |                     |
|                  | Protection                               |                    | Short circuit protection  |                       |                     |                      |                      |                    |                       |                     |
|                  |  |                    | Voltage output: 1 to 5 V, 0 to 10 V (only when the power supply voltage is 24 VDC)  |                       |                     |                      |                      |                    |                       |                     |
|                  | Output type                              |                    | Current output: 4 to 20 mA  |                       |                     |                      |                      |                    |                       |                     |
| A I              |  |                    | (0 L/min to maximum value of the rated flow)  |                       |                     |                      |                      |                    |                       |                     |
| Analog output*5  |  | Voltage output     |   |                       |                     | Output impe          | edance: 1 kΩ         |                    |                       |                     |
|                  | Impedance                                |                    | Maximum load impedance: 300 $\Omega$ (at power supply voltage of 12 V), 600 $\Omega$ (at power supply voltage of 24 VDC)              |                       |                     |                      |                      |                    |                       |                     |
|                  | Response time*                           | 2                  |   |                       |                     | 50 ms                | or less              |                    |                       |                     |
| F41!4*6          | External input                           |                    |   | Input v               | oltage: 0.4 V       | or less (Reed        | or Solid state       | e) for 30 ms or    | r longer              | -                   |
| External input*6 | Input mode                               |                    | Select from Accumulated value external reset or Peak/Bottom value reset.  |                       |                     |                      |                      |                    |                       |                     |
|                  | ·  |                    | Voltage input: 1 to 5 VDC (Input impedance: 1 MΩ), Current input: 4 to 20 mA DC (Input impedance: 51 Ω)                               |                       |                     |                      |                      |                    |                       |                     |
|                  | Input type                               |                    |   |                       |                     |                      | value of the ra      |                    | (                     | ,                   |
| Sensor input     | Connection method                        |                    |   |                       |                     | Connecto             | r (e-CON)            |                    |                       |                     |
|                  | Protection                               |                    | Over voltage protection (Up to 26.4 VDC)  |                       |                     |                      |                      |                    |                       |                     |
|                  | Display mode                             |                    | Select from Instantaneous flow or Accumulated flow.   |                       |                     |                      |                      |                    |                       |                     |
|                  |  | Instantaneous flow | L/min, cfm (ft³/min)  |                       |                     |                      |                      |                    |                       |                     |
|                  | Unit* <sup>7</sup>                       | Accumulated flow   | L, ft <sup>3</sup> , L x 10 <sup>6</sup> , ft <sup>3</sup> x 10 <sup>6</sup>  |                       |                     |                      | -                    | -                  | -                     |                     |
|                  |  | Instantaneous flow | -0.05 to 1.05 L/min   | -0.1 to 2.1 L/min     | -0.25 to 5.25 L/min | -0.5 to 10.5 L/min   | -1.3 to 26.3 L/min   | -2.5 to 52.5 L/min | -5 to 105 L/min       | -10 to 210 L/min    |
|                  | Display range                            | Accumulated flow*9 |   | 0 to 99,999,          |                     |                      |                      | 0 to 999,99        |                       |                     |
| B: 1             | Minimum                                  | Instantaneous flow |   |                       | L/min               |                      |                      | 0.1 L/min          |                       | 1 L/min             |
| Display          | display unit                             | Accumulated flow   |   |                       | <br>1 L             |                      |                      |                    | L                     |                     |
|                  | Display type                             |                    | LCD   |                       |                     |                      |                      |                    |                       |                     |
|                  | Number of displ                          | avs                | 3-screen display (Main screen, Sub screen)  |                       |                     |                      |                      |                    |                       |                     |
|                  | Display color                            | , .                | 1) Main screen: Red/Green, 2) Sub screen: Orange  |                       |                     |                      |                      |                    |                       |                     |
|                  | Number of display digits                 |                    | 1) Main screen: 5 digits (7 segments), 2) Sub screen: 9 digits (7 segments)   |                       |                     |                      |                      |                    |                       |                     |
|                  | Indicator LED                            |                    | LED ON when switch output is ON OUT1/2: Orange  |                       |                     |                      |                      |                    |                       |                     |
| Digital filter*8 |  |                    | Select from 0.00, 0.05 to 0.1 s (increment of 0.01 s), 0.1 to 1.0 s (increment of 0.1 s), 1 to 10 s (increment of 1 s), 20 s, or 30 s |                       |                     |                      |                      |                    |                       |                     |
| Enclosure        |  | IP40               |   |                       |                     |                      |                      |                    |                       |                     |
|                  |  | ne e               |   |                       |                     |                      |                      |                    |                       |                     |
| Environment      | Withstand voltage                        |                    | 1000 VAC for 1 minute between terminals and housing   |                       |                     |                      |                      |                    |                       |                     |
|                  | Insulation resistance                    |                    | 50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing  |                       |                     |                      |                      |                    |                       |                     |
|                  | Operating tempera                        |                    | Operating: 0 to 50°C, Stored: –10 to 60°C (No condensation or freezing)   |                       |                     |                      |                      |                    |                       |                     |
| Ctondoude        | Operating humidity range                 |                    | Operating/Stored: 35 to 85% RH (No condensation or freezing)  |                       |                     |                      |                      |                    |                       |                     |
| Standards        | D1                                       |                    | CE/UKCA marking (EMC directive/RoHS directive)  |                       |                     |                      |                      |                    |                       |                     |
| Weight           | Body                                     |                    | 25 g (Excluding the power supply/output connection lead wire)   |                       |                     |                      |                      |                    |                       |                     |
| -                | Lead wire with connector                 |                    | +39 g   |                       |                     |                      |                      |                    |                       |                     |


- \*1 Rated flow range of the applicable flow switch
- \*2 Value without digital filter (at 0.00 s)
- \*3 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum access limit of the memory device is 1.5 million times. If the product is operated 24 hours per day, the product life will be as follows:
  - 5 min interval: life is calculated as 5 min x 1.5 million = 7.5 million min = 14.3 years
  - $\cdot$  2 min interval: life is calculated as 2 min x 1.5 million = 3 million min = 5.7 years If the accumulated value external reset is repeatedly used, the product life will be shorter than the calculated life.
- \*4 If the flow fluctuates around the set value, the width for setting more than the fluctuating width needs to be set. Otherwise, chattering will occur.
- \*5 Setting is only possible for models with analog output.
- \*6 Setting is only possible for models with external input.
- \*7 Setting is only possible for models with the units selection function.
- \*8 The response time indicates when the set value is 90% in relation to the step input.
- 9 The accumulated flow display is the upper 6-digit and lower 6-digit (total of 12 digits) display. When the upper digits are displayed,  $\times$  10<sup>6</sup> lights up.
- Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.




### PFG300 Series

### **Internal Circuits and Wiring Examples**


- -XY
- -RT -SV
- NPN (2 outputs) + Copy function

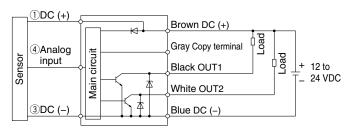


-RT: NPN (2 outputs) + Analog voltage output -SV: NPN (2 outputs) + Analog current output

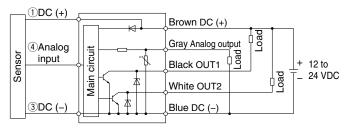


-RT: NPN (2 outputs) + External input -SV: NPN (2 outputs) + External input

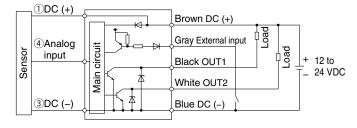


- -XY
- -RT -SV
- PNP (2 outputs) + Copy function

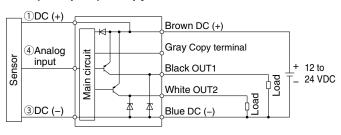


-RT: PNP (2 outputs) + Analog voltage output -SV: PNP (2 outputs) + Analog current output

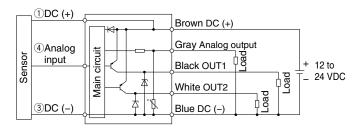


-RT: PNP (2 outputs) + External input -SV: PNP (2 outputs) + External input

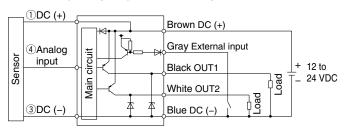

#### Accumulated pulse output wiring examples

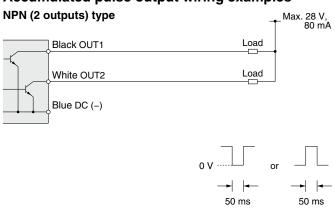



#### PNP (2 outputs) type

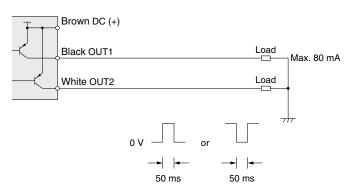


### 3-Screen Display Digital Flow Monitor **PFG300 Series**


### **Dimensions**






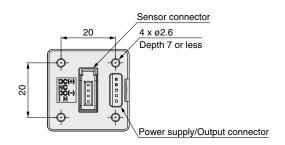


Bracket A (Part no.: ZS-46-A1)







25




 Bracket configuration allows for mounting in four orientations.


Bracket B (Part no.: ZS-46-A2)








\* Bracket configuration allows for mounting in four orientations.




### PFG300 Series


### **Dimensions**


### Panel mount adapter (Part no.: ZS-46-B)



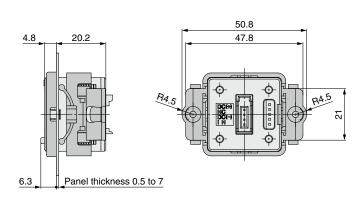


### Panel mount adapter + Front protection cover (Part no.: ZS-46-D)

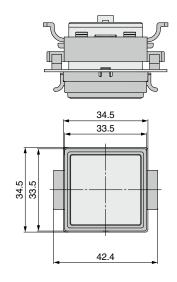

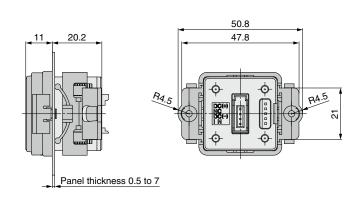

### Power supply/output connection lead wire (Part no.: ZS-46-5L)



### Sensor connector (Part no.: ZS-28-C-1)

| Pin no. | Terminal |
|---------|----------|
| 1       | DC (+)   |
| 2       | N.C.     |
| 3       | DC (-)   |
| 4       | IN*1     |

\*1 1 to 5 V or 4 to 20 mA






**Cable Specifications** 

| Cable Specifications    |                           |  |  |  |  |
|-------------------------|---------------------------|--|--|--|--|
| Conductor cross section |                           | 0.15 mm <sup>2</sup> (AWG26)             |  |  |  |
| Insulator               | Outside diameter          | 1.0 mm                                   |  |  |  |
|                         | Color                     | Brown, Blue, Black, White, Gray (5-core) |  |  |  |
| Sheath                  | Finished outside diameter | ø3.5                                     |  |  |  |




### **Dimensions**


### Panel fitting dimensions




#### Multiple (2 pcs. or more) secure mounting <Horizontal>

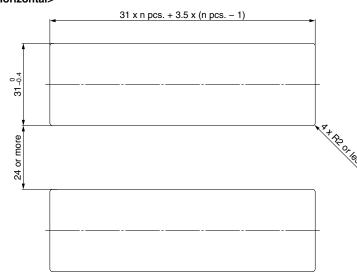


#### Panel mount example <Horizontal>

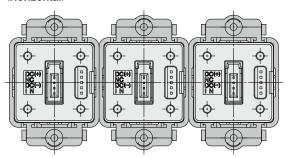

#### <Vertical>

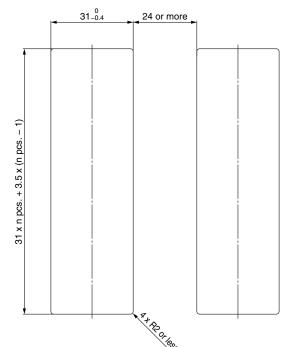

#### Panel mount example <Vertical>

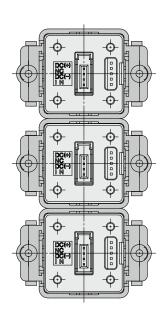



### **⚠** Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of "Caution," "Warning" or "Danger." They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)\*1), and other safety regulations.

Caution: Caution indicates a hazard with a low level of risk which, If not avoided, could result in minor or moderate injury.

-----

Warning: Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

⚠ Danger: Danger if not avoided, will result in death or serious injury. **Danger** indicates a hazard with a high level of risk which, \*1) ISO 4414: Pneumatic fluid power - General rules relating to systems.

ISO 4413: Hydraulic fluid power – General rules relating to systems.

IEC 60204-1: Safety of machinery - Electrical equipment of machines. (Part 1: General requirements)

ISO 10218-1: Manipulating industrial robots - Safety.

### **⚠Warning**

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/ equipment until safety is confirmed.

- 1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
- 2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
- 3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

#### 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

- 1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
- 2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
- 3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
- 4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

### **⚠** Caution

1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.

If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary. If anything is unclear, contact your nearest sales branch.

### Limited warranty and Disclaimer/ **Compliance Requirements**

The product used is subject to the following "Limited warranty and Disclaimer" and "Compliance Requirements".

Read and accept them before using the product.

### **Limited warranty and Disclaimer**

- 1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.\*2)
  - Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- 2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- 3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.
  - 2) Vacuum pads are excluded from this 1 year warranty.

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.

Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

#### Compliance Requirements

- 1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- 2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

### **⚠** Caution

#### SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

#### **Revision History**

- Edition B \* The PF2M701, 702, and 705 have been added.
  - \* A female thread type has been added.
  - \* The IO-Link compatible PF2M7-L series has been added.
  - \* Internal circuits and wiring examples have been revised.
  - \* A made-to-order option (Compatible with argon (Ar) and carbon dioxide (CO2) mixed gas) has been added.
  - \* Number of pages has been increased from 20 to 28.

- Edition C \* A flow adjustment valve (0.05 to 5 L/min) has been added.
  - \* A 2 to 200 L/min flow range option has been added.
  - \* A rear ported type has been added.
  - \* Number of pages has been increased from 28 to 32.

7V

↑ Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.