Compact Direct Operated

2/3-Port Solenoid Valve for Chemical Liquids






Low Particle Generation

Oil-free

Metal-free

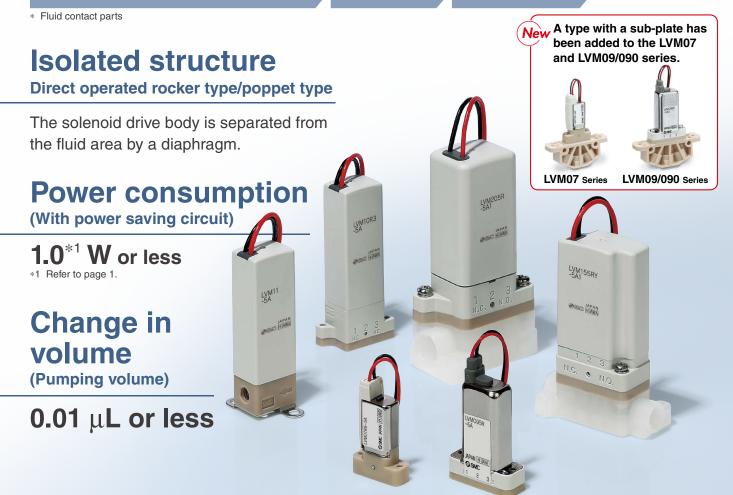







Variations/Options






LVM Series



LVM07, 09/090, 10/100, 15/150, 20/200 p.77 p.17 p.17 p.29

Isolated structure


The solenoid drive body is separated from the fluid area by a diaphragm.

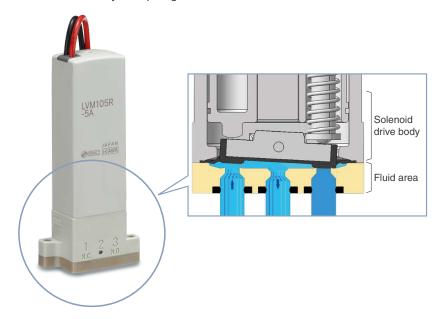

Fluid contact material (Metal-free)

PEEK

Choice of **EPDM, FKM, or** Kalrez®



- Body/Plate material*1: PEEK
- Diaphragm material: EPDM, FKM, or Kalrez®
- Interface gasket/O-ring material: EPDM, FKM, or Kalrez®
- *1 PFA can be selected for the plate material of the LVM10/100 base-mounted type.
- Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Change in volume (Pumping volume)

 $0.01~\mu$ L or less



With a normal diaphragm valve, because the valve chamber volume varies depending on the ON or OFF status, the difference in volume is discharged into the outlet side of the valve when the valve is switched from ON to OFF.

However, with a rocker type valve, there is almost no change in volume, and thus no fluid is discharged into the outlet side of the valve.

Valve chamber volume

Residual liquid is reduced by suppressing the valve chamber volume.

| | _ New | | | | |
|---------------------------|-------|-----------|-----------|-----------|-----------|
| Model | LVM07 | LVM09/090 | LVM10/100 | LVM15/150 | LVM20/200 |
| Valve chamber volume [μL] | 8 | 18 (29)*1 | 20 (28)*1 | 50 (60)*1 | 84 |
| Orifice diameter [mm] | 0.8 | 1 (1.1)*2 | 1.4 | 1.6 | 2 |


- *1 (): For R6
- *2 (): For the base-mounted type

A type with a power saving circuit can be selected.

- Holding power consumption can be reduced substantially.
- Continuous energization for extended periods of time is possible.

| Mod | el | LVM07 | LVM09/090 | LVM10/100 | LVM15/150 | LVM20/200 |
|--------------------|---------|-------|-----------|-----------|-----------|-----------|
| Power | Inrush | 2.8 | 3.3 | 2.5 | 5.5 | 4 |
| consumption [W] | Holding | 0.8 | 0.9 | 1 | 1 | 0.6 |

Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time or used with a manifold.

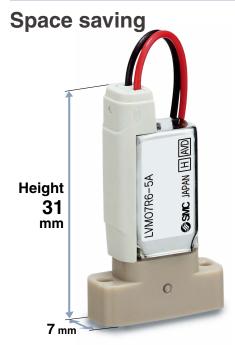


New LVM07 Series

■ Valve width: 7 mm

■ Compact & Lightweight

Volume: 3.9 cm³
Height: 31 mm
Weight: 7 g

| • weight: I | Unit: mm | |
|-------------|-------------|----------------|
| Model | Valve width | Manifold pitch |
| New LVM07 | 7 | 8 |
| LVM09/090 | 9.5 | 10.5 |
| LVM10/100 | 13 | 14 |
| LVM15/150 | 16 | 17 |
| LVM20/200 | 20 | 21 |




Required space reduced by 50%

Reduction in piping volume Manifold can be designed to suit the space

Weight reduced by 70%


Weight reduced by using resin No piping work required

No piping work required between components

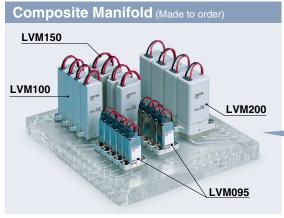

Flow passage style with high flexibility

Three-dimensional flow passage that cannot be created by machining or injection molding



New Options

Plug connector, With light/surge voltage suppressor

Applicable models

| Model | LVM07 | LVM09/090 | LVM10/100 | LVM15/150 | LVM20/200 |
|-------------------------------------|-------|-----------|-----------|-----------|-----------|
| Plug connector | _ | • | • | • | • |
| With light/surge voltage suppressor | _ | • | • | • | • |



Applicable models

| LVM07 | LVM09/090 | LVM10/100 | LVM15/150 | LVM20/200 |
|-------|-----------|-----------|-----------|-----------|
| | | | | |





Series Variations

| | | | Valve typ | | type Operating | | Orifice Volume | | Valve Weight | | Power | Options Reverse Electrical entry With light/ | | | |
|--------------|--|--------------------|-----------|----------|----------------|------------------------|----------------|------------------|---------------|-----|--|---|---------|-----------|---------------------------------|
| | | Model | N.C. | N.O. | Universal | pressure range | dia. [mm] | of valve chamber | chamber width | | consumption [W] | Reverse mounting prevention | Grommet | Plug | With light/ surge voltage |
| Base mounted | Without sub-plate With sub-plate | LVM07R6 | (2-port) | (2-port) | (3-port) | –75 kPa to 0.1 MPa | 0.8 | [μ L] | 7 | 7 | Holding: 0.8 (With power saving circuit) | pin | • | connector | suppressor |
| pa | p. 11 | LVM09R1 | • | | | | | | | | Standard: 2 Power saving | | | | |
| Body ported | AND SECOND SECON | LVM09R2 | | • | | -75 kPa to 0.2 MPa | 1 | 18 9. | 9.5 | 22 | option Holding: 0.9 | _ | • | • | • |
| B | III | LVM092R | | | • | | | | | | (With power saving circuit) | | | | |
| ted | p. 11 | LVM09R3 | • | | | –75 kPa to | | 18 | | | Standard: 2 Power saving | | | | |
| Base mounted | Control of the contro | LVM09R4 | | • | | -75 kPa to 0.2 MPa | 1.1 | | 9.5 | 20 | option Holding: 0.9 | • | • | • | • |
| Base | Without With sub-plate sub-plate | LVM09R6 | • | | | 0.2 IVIFA | | 29 | | | (With power saving circuit) | | | | |
| | p. 17 | LVM095R | | | • | | | 18 | | | | | | | |
| Body ported | / / | LVM10R1 LVM10R2 | • | • | | –75 kPa to 0.25 MPa | 1.4 | 20 | 13 | 34 | Standard: 1.5 Power saving option Holding: 1 | _ | • | • | • |
| Bod | | LVM102R | | | • | 0.23 WII U | | | | | (With power saving circuit) | | | | |
| Base mounted | D. 17 | LVM10R3 LVM10R4 | • | • | | –75 kPa to | | 20 | 10 | 0.4 | Standard: 1.5 Power saving option | | | | |
| ase m | 6 | LVM10R6 | • | | | 0.25 MPa | 1.4 | 28 | 13 | 34 | Holding: 1 (With power | | | | • |
| m | Without With sub- sub- plate plate | LVM105R | | | • | | | 20 | | | saving circuit) | | | | |
| ted | p. 24 | LVM15R3 | • | | | | | 50 | | | | | | | |
| Base mounte | 13 mm | LVM15R4 | | • | | -75 kPa to 0.25 MPa | 1.6 [1] | | 16 | 45 | Holding: 1 (With power | • | • | • | • |
| Base | Without With sub- | LVM15R6 | • | | | [Max. 0.6 MPa] | [.] | 60 | | | saving circuit) | | | | |
| | plate plate | LVM155R | _ | | • | | | 50 | | | 0 | | | | |
| rted | | LVM20R1 | • | | | 75.15 | | | | | Standard: 2.5 Power saving | | | | |
| Body ported | 20° 100° 100° 100° 100° 100° 100° 100° 1 | LVM20R2 | | • | | -75 kPa to 0.25 MPa | 2 | 84 | 20 | 80 | option Holding: 0.6 | _ | • | • | • |
| ă | 100 | LVM202R | | | • | | | | | | (With power saving circuit) | | | | |
| nted | p. 29 | LVM20R3 | • | | | | | | | 80 | Standard: 2.5 Power saving | | | | |
| Base mounted | | LVM20R4 | | • | | -75 kPa to 0.3 MPa | 2 | 84 | 20 | | option Holding: 0.6 (With power | • | • | • | • |
| Ва | Without With sub- sub- plate plate | LVM205R | | | • | | | | | | saving circuit) | | | | |

The [] indicate the values of the high-pressure type.




Piping/Mounting Variations

| Piping/ Mounting | | Base m | ounted | | |
|---------------------|--|--|-------------------|------|--|
| Model | Body ported | Without sub-plate | With sub-plate | Page | |
| LVM07 | _ | William MO o | Material: PEEK | 7 | |
| LVM09/090 | SHOWN | Dispose of the state of the sta | Material: PEEK | 11 | |
| LVM10/100 | Manual override (Option) Tubing (Provided by the customer) | Manual override (Option) Base (Provided by the vertice of the provided by t | | | |
| LVM15/150 | _ | SANCE NO. | Material: PVDF | 24 | |
| LVM20/200 | Success And the succes | Steams 1 2 3 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | Material: PVDF | 29 | |

Direct Operated Poppet Type

LVM11/13

Less clogging due to the poppet construction

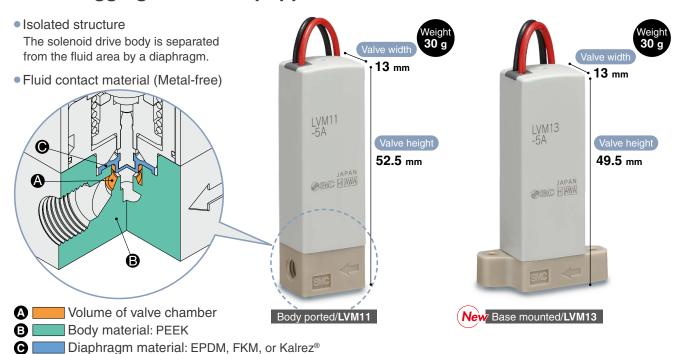

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Electrical entry





- Orifice diameter: 1.5 mm
- Volume of valve chamber

Unit: μL Model LVM11 LVM13 Volume of 11 13 valve chamber

Power saving circuit standardized

Holding power consumption can be reduced substantially. Continuous energization for extended periods of time is possible. Unit: W

| Mode | el | LVM11 | LVM13 |
|-------------|---------|-------|-------|
| Power | Inrush | 2.5 | 2.5 |
| consumption | Holding | 1 | 1 |

Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time or used with a manifold.

- With light/surge voltage suppressor
- With reverse mounting prevention pin (Option)
- Application: Liquid discharge, etc.

Series Variations

| | | Valve type Operating Orifice of valve width Weig | | | Рошок | Power | | | | | Base | | | | | | | |
|-----------------|---|--|----|------------------|------------------|---|--------------------------|-------|---------|---------------------------|----------|----------|-------------------|--------------------------------|--------|--------------------------|-----------------------|-------|
| | | Model | ty | pe | pressure | dia. | of valve | width | Weight | consumption | Reverse | Electric | al entry | With light/ | | mounted | | Page |
| | \bigcirc | Model | | N.O. (2-port) | range | [mm] | chamber [μ L] | [mm] | [g] [W] | | mounting | Grommet | Plug connector | surge voltage suppressor | ported | Without sub- plate | With sub- plate | i age |
| Body ported | CANT CONTRACT OF THE CONTRACT | LVM11 | • | | 0 to 0.25 MPa | 1.5 | 11 | 13 | 30 | Inrush: 2.5 Holding: 1 | _ | • | • | • | • | _ | _ | 20 |
| Base mounted | Diens Company | New LVM13 | • | | 0 to 0.25 MPa | 1.5 | 13 | 13 | 30 | Inrush: 2.5 Holding: 1 | • | • | • | • | _ | • | _ | 36 |

·· p. 12 • p. 13

·····p. 15 ·····p. 16

CONTENTS

Compact Direct Operated 2/3-Port Solenoid Valve for Chemical Liquids

| | OBE WATELAN |
|------------------------------|-------------|
| NOTRE-SA Darc Jewn (H)@33 | - · · · · |
| | |

| Prince and and a contract of the contract of t | Total and |
|--|---|
| | |

| Direct Operated Rocker Type LVM07 Series | 5 |
|--|------|
| How to Order ····· | p. 7 |
| Specifications ······ | p. 8 |
| Flow Rate Characteristics ····· | p. 8 |
| Construction: Base mounted | n a |



| Direct Operated Rocker Type | LVM09/090 Series |
|-----------------------------|------------------|
|-----------------------------|------------------|

Dimensions: Base mounted

| How to Order ····· |
|---|
| Specifications ····· |
| Flow Rate Characteristics · · · · · · · · · · · · · · · · · · · |
| Construction: Body ported ······ |
| Construction: Base mounted ······ |
| Dimensions: Body ported ······ |
| Dimensions: Base mounted ······ |
| |
| |





| briect Operated Hocker Type LV IVI 10/ 100 Series | |
|---|------------|
| How to Order ····· | p. 17 |
| Specifications ····· | ·····p. 18 |
| Flow Rate Characteristics ····· | p. 18 |
| Construction: Body ported ······ | p. 19 |
| Construction: Base mounted ······ | p. 20 |
| Dimensions: Body ported ····· | p. 21 |
| Dimensions: Base mounted ····· | p. 22 |
| | |



Direct Operated Rocker Type LVM15/150 Series

| How to Order ····· | p. 24 |
|-----------------------------------|-------|
| Specifications ······ | p. 25 |
| Flow Rate Characteristics ······ | p. 25 |
| Construction: Base mounted ······ | p. 26 |
| Dimensions: Base mounted ······ | p. 27 |
| | |



Direct Operated Rocker Type LVM20/200 Series

| Llow to Order | p. 29 |
|--------------------------------|------------|
| | P: = - |
| Specifications ······ | p. 30 |
| Flow Rate Characteristics ···· | p. 30 |
| Construction: Body ported ···· | ·····p. 31 |
| | p. 32 |
| Dimensions: Body ported ····· | p. 33 |
| Dimensions: Base mounted ·· | p. 34 |
| | |



Direct Operated Poppet Type LVM11/13 Series

| Specifications ····· | ·····p. 37 |
|------------------------------------|------------------|
| Flow Rate Characteristics ····· | p |
| Construction ····· | p. 38 |
| Dimensions: Body ported ······ | p. 39 |
| Dimensions: Base mounted ····· | ·····p. 40 |
| Specific Product Precautions ····· | |
| Spare Parts ····· | ·····p. 44 |
| Safety Instructions ····· | ····· Back cover |


p. 36



Compact Direct Operated [Option] 2-Port Solenoid Valve for Chemical Liquids

LVM07 Series

How to Order



Without sub-plate Base mounted

With sub-plate Base mounted

Number of ports, Valve type

| | | <u> </u> | , · · · · / / · · |
|--------|-----------------|------------|--------------------------|
| Symbol | Number of ports | Valve type | |
| 07R6 | 2 | N.C. | IN IN OUT |

2 Power saving circuit Nil None (Standard type)

3 Coil voltage Voltage 24 VDC 6 12 VDC

4 Fluid contact material Body Diaphragm PEEK **EPDM** Α В PEEK FKM **PEEK** Kalrez®

5 Sub-plate material/port size, Reverse mounting prevention pin

| Symbol | Sub-plate | | Reverse mounting | |
|----------|-----------|-----------|--------------------------------------|--|
| Cyllibol | Material | Port size | prevention pin | |
| Nil | | | None | |
| Р | N | lone | Yes Reverse mounting prevention pin | |
| 3 | PEEK | M6 | None | |
| 3U | FEEN | 1/4-28UNF | None | |

* A sub-plate cannot be mounted for "P" (With reverse mounting prevention pin).

| Nil | 150 mm |
|-----|--------|
| 3 | 300 mm |
| 6 | 600 mm |

6 Lead wire length CE/UKCA-compliant

| Nil | No |
|-----|-------------------|
| Q | CE/UKCA-compliant |
| | |

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

For the type without a sub-plate, mounting screws are included. (2 pcs.)

M1.6 x 8.5/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.

Specifications




Without sub-plate Base mounted



With sub-plate Base mounted

- Base mounted Model LVM07R6 Valve construction Direct operated rocker type Valve type N.C. Number of ports 2 Fluid*1 Air, Water, DI water (Pure water), Diluent, or Cleaning fluid Operating pressure range -75 kPa to 0.1 MPa Orifice diameter 0.8 mm Response time*8 10 ms or less (at pneumatic pressure) Zero leakage, both internal or external (at water pressure) Leakage Proof pressure*2 0.15 MPa Ambient temperature*9 0 to 50°C (No condensation) Fluid temperature*9 0 to 50°C Volume of valve chamber*3 8 μL Mounting orientation*4 Free **Enclosure** IP40 or equivalent Weight 7 g (Without sub-plate), 11 g (With sub-plate) Rated voltage 12, 24 VDC Allowable voltage fluctuation*5 ±10% of rated voltage Type of coil insulation Class B 2.8 W Power Standard type (0.12 A)*6 consumption With (When rated 2.8 W power Inrush voltage is at (0.12 A)saving 24 V) circuit Holding 0.8 W Coil switching noise*7 50 dB
- *1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.
- *2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test
- *3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted
- *4 When residual liquid needs to be taken into consideration, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.
- *5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
- *6 The LVM07R6 (standard type) requires power saving control. Conduct power saving control according to the figure below.



- *7 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.
- *8 In compliance with JIS B 8419:2010 (Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)
 - The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.
- *9 When the diaphragm material is Kalrez[®], the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).

Flow Rate Characteristics

| Water | | Air | |
|-------|-------|------|-----|
| Κv | Cv | С | b |
| 0.004 | 0.005 | 0.02 | 0.2 |

The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.


* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



LVM07 Series

Construction

Base mounted LVM07R6

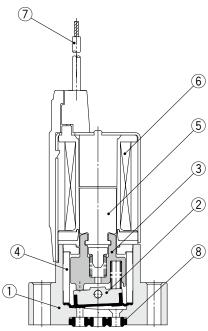

Component Parts


| No. | Description | Material | |
|-----|------------------------|---------------------|--|
| 1 | Body | PEEK | |
| 2 | Diaphragm assembly | EPDM/FKM/Kalrez® | |
| 3 | Slide bushing assembly | PPS/Stainless steel | |
| 4 | Bushing | PPS | |
| 5 | Armature | _ | |
| 6 | Coil assembly | _ | |
| 7 | Lead wire | _ | |
| 8 | Interface gasket | EPDM/FKM/Kalrez® | |

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



Dimensions

Base mounted LVM07R6

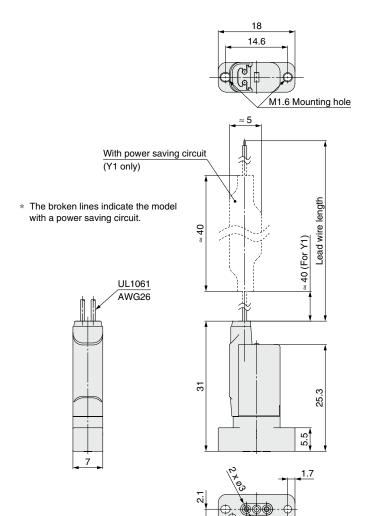

ø1.8 depth 3

For Option "P" (With reverse mounting prevention pin): ø1.3, height 2

When using a positioning pin for mounting, the size should be Ø1.5, and the height should be 2 or less. For Option "P" (With reverse mounting prevention pin), the size should be Ø1.5, and the depth should be 2.3 or more. 14.6 ±0.1 13 ±0.1 4.7 4.95 2 x M1.6 x 0.35 Effective thread length 3 or more


4.95



10 A

LVM07 Series

Dimensions

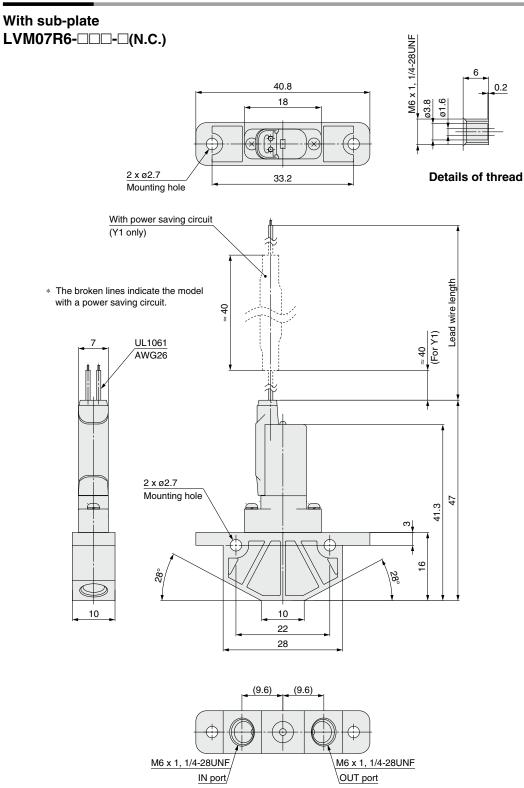





Without sub-plate

Base mounted

Symbol

В

С



With sub-plate Base mounted

Diaphragm

EPDM


FKM

Kalrez®

Compact Direct Operated [Option] 2/3-Port Solenoid Valve for Chemical Liquids

LVM09/090 Series



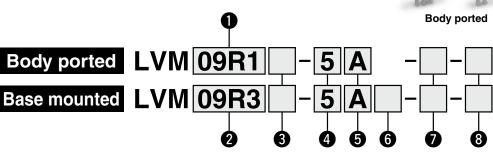

Number of ports, Valve type

| Symbol | Number of ports | | Valve type |
|--------|-----------------|-----------|-------------------|
| 09R1 | 2 | N.C. | IN OUT (Symbol 2) |
| 09R2 | | N.O. | IN OUT (Symbol 2) |
| 092R | 3 | Universal | 1 2 |

2 Number of ports, Valve type

| | O Itamber of porte, valve type | | | | |
|--------|--------------------------------|-----------|-------------------|--|--|
| Symbol | Number of ports | | Valve type | | |
| 09R3 | | N.C. | IN OUT (Symbol 2) | | |
| 09R4 | 2 | N.O. | IN OUT (Symbol 2) | | |
| 09R6 | | N.C. | IN OUT (Symbol 3) | | |
| 095R | 3 | Universal | 1 2 | | |

CE/UKCA-compliant

| Nil | No |
|-----|-------------------|
| Q | CE/UKCA-compliant |

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Power saving circuit

| | • | | |
|-------------------------|----------------------|--|--|
| Nil None (Standard type | | | |
| Υ | Yes (Plug connector) | | |
| Y1 | Yes (Grommet) | | |
| | | | |

A Coil voltage

| | U Con voitage | |
|--------|---------------|--|
| Symbol | Voltage | |
| 5 | 24 VDC | |
| 6 | 12 VDC | |

Sub-plate material/port size,

| Reverse mounting prevention pin | | | | |
|---------------------------------|------------------------------|-----------|-----------------------|--|
| Symbol | Sub-plate Material Port size | | Reverse mounting | |
| Symbol | | | prevention pin | |
| Nil | | | None | |
| Р | None | | Yes Reverse mounting | |
| | | | prevention pin | |
| 3 | PEEK | M6 | None | |
| 3U | I LLIX | 1/4-28UNF | None | |

* A sub-plate cannot be mounted for "P" (With reverse

mounting prevention pin).

Fluid contact material Plate

PEEK

PEEK

PEEK

Flectrical entry. Lead wire length, Light/surge voltage suppressor

| Liectifical entry, Lead wife length, Light/Surge voltage suppliessor | | | |
|--|------------------------------------|---|------------|
| Symbol | Electrical entry, Lead wire length | Light/surge voltage sup | pressor |
| Nil | Grommet, 150 mm | | |
| 3 | Grommet, 300 mm | Cannot be selected | |
| 6 | Grommet, 600 mm | | |
| K | Plug connector, 300 mm | None | L I |
| КО | Plug connector, Without connector | None | II I |
| KZ | Plug connector, 300 mm | Yes * Power saving circuit "Y" is | |
| KOZ | Plug connector, Without connector | equipped with a light/surge voltage suppressor. | |

- "3" or "6" must be selected for power saving circuit "Y1" (grommet). "Nil" cannot be selected.
- * The plug connector is included but does not come assembled.
- * If a lead wire length of 600 mm or more is required, select "KO \square " (Without connector) and then add the connector part number shown below under the valve part number when ordering.

Plug connector part no.: SY100 - 30 - 4A -

Lead wire length

| 6 | 600 mm | |
|----|---------|--|
| 10 | 1000 mm | |
| 30 | 3000 mm | |

Mounting screws are included with the base-mounted type (Without sub-plate). (2 pcs.) M2 x 11/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.



Specifications



Body ported



Body ported



Without sub-plate Base mounted



Without sub-plate Base mounted



With sub-plate Base mounted

- Body ported (Tube connection type) Base mounted Model LVM09R1 LVM09R2 LVM092R LVM09R3 LVM09R4 LVM09R6 LVM095R Valve construction Direct operated rocker type Valve type N.C N.O. Universal N.C. N.O N.C Universal **Number of ports** 2 2 3 Fluid*1 Air, Water, DI water (Pure water), Diluent, or Cleaning fluid Operating pressure range -75 kPa to 0.2 MPa Orifice diameter Response time*7 10 ms or less (at pneumatic pressure) Leakage Zero leakage, both internal or external (at water pressure) Proof pressure*2 0.3 MPa Ambient temperature*8 0 to 50°C Fluid temperature*8 0 to 50°C (No freezing) Volume of valve chamber*3 18 μL 18 uL 29 μL 18 μL Mounting orientation*4 Free **Enclosure** IP40 or equivalent Weight 22 g 20 g (Without sub-plate), 24 g (With sub-plate) Rated voltage 12, 24 VDC Allowable voltage fluctuation*5 ±10% of rated voltage Type of coil insulation Class B 2 W Standard type (0.08 A)consumption With (When rated 3.3 W power Inrush voltage is at (0.14 A). saving 24 V) circuit Holding 0.9 W Coil switching noise*6 50 dB
- *1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.
- *2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test
- *3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted
- *4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.
- 5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
- *6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.
- *7 In compliance with JIS B 8419:2010 (Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)
 - The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.
- *8 When the diaphragm material is Kalrez®, the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).
- * Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.

Flow Rate Characteristics

| Water | | Α | ir |
|-------|-------|------|-----|
| Kv | Cv | С | b |
| 0.015 | 0.018 | 0.06 | 0.2 |


The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.


^{*} Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM09/090 Series


Construction

Body ported LVM09R1

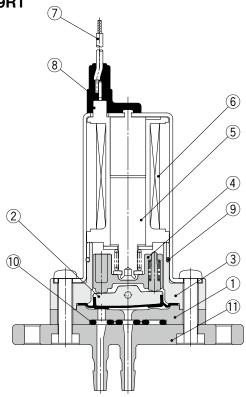

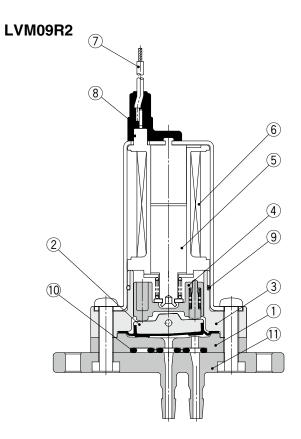

LVM092R

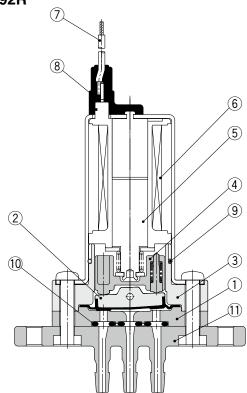

Component Parts: LVM09R1, 09R2, 092R


| No. | Description | Material |
|-----|------------------------|---------------------|
| 1 | Plate | PEEK |
| 2 | Diaphragm assembly | EPDM/FKM/Kalrez® |
| 3 | Body | PBT |
| 4 | Slide bushing assembly | PPS/Stainless steel |
| 5 | Armature assembly | _ |
| 6 | Coil assembly | _ |
| 7 | Lead wire | _ |
| 8 | Mold | PET |
| 9 | O-ring | NBR |
| 10 | Interface gasket | EPDM/FKM/Kalrez® |
| 11 | Piping plate | PEEK |
| | | |

^{*} Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.




Construction




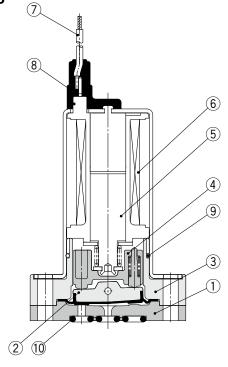


LVM09R4

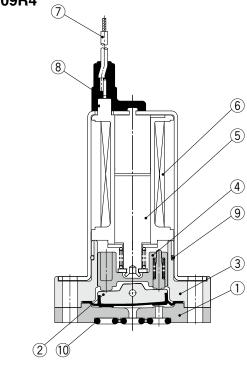

LVM09R6

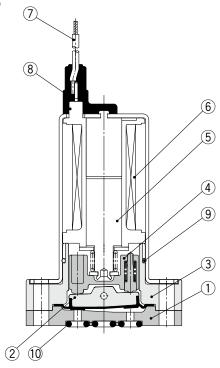

LVM095R

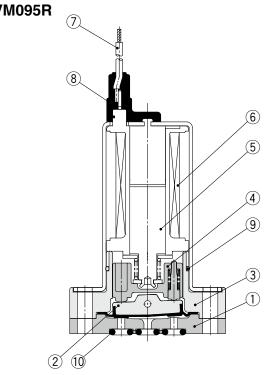

Component Parts: LVM09R3, 09R4, 09R6, 095R

| Description | Material |
|------------------------|--|
| Plate | PEEK |
| Diaphragm assembly | EPDM/FKM/Kalrez® |
| Body | PBT |
| Slide bushing assembly | PPS/Stainless steel |
| Armature assembly | _ |
| | Plate Diaphragm assembly Body Slide bushing assembly |

| No. | Description | Material |
|-----|------------------|------------------|
| 6 | Coil assembly | _ |
| 7 | Lead wire | _ |
| 8 | Mold | PET |
| 9 | O-ring | NBR |
| 10 | Interface gasket | EPDM/FKM/Kalrez® |





LVM09/090 Series

Dimensions

Body ported LVM09R1 LVM09R2




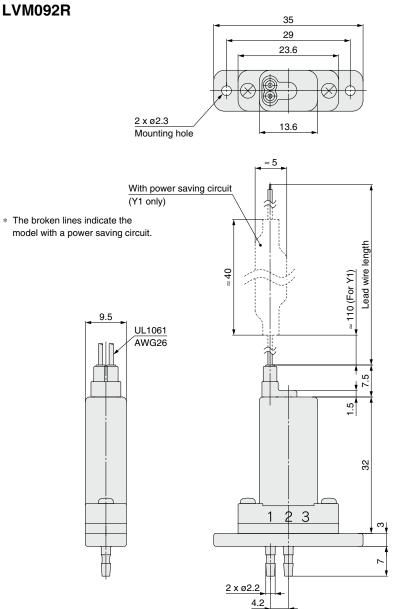

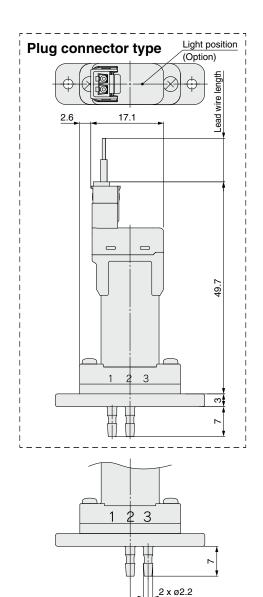


LVM09R2

4.2



LVM09R1



Dimensions

With sub-plate


LVM09R3-□□-□(N.C.)


LVM09R4-□□□-□(N.O.)


LVM09R6-□□□-□(N.C.)


LVM095R-□□□-□(Universal)



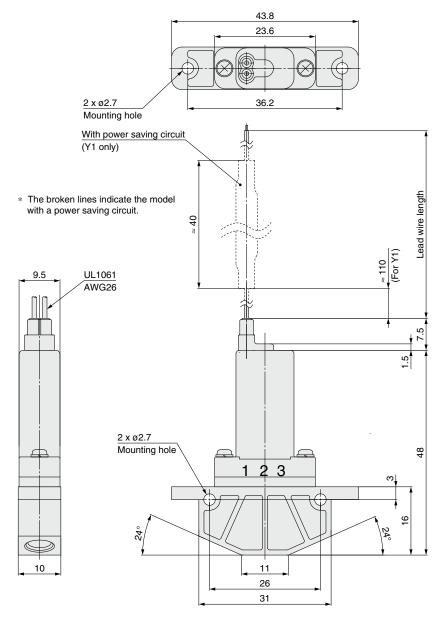

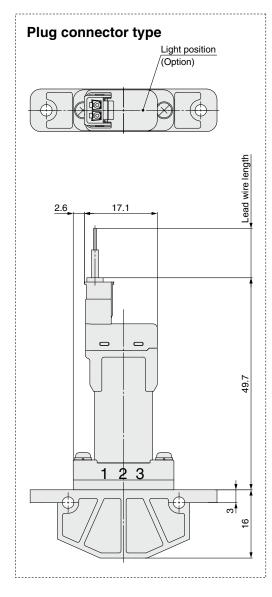

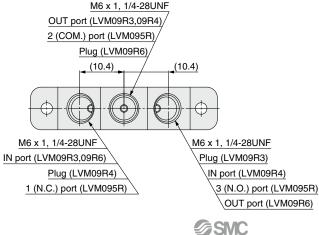






Details of thread





Dimensions

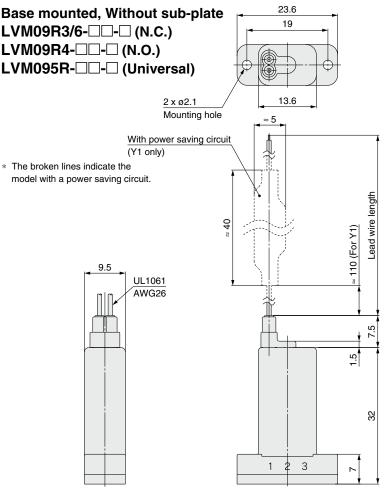


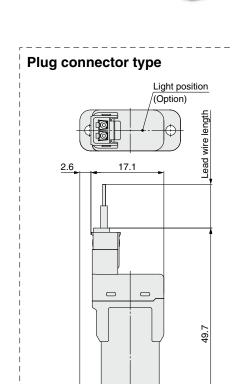










3

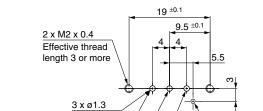

C0.2 or less

2 (COM.), OUT

3 (N.O.), OUT

Not required for the LVM09R6

Not required for the LVM09R3


1 (N.C.), IN

When using a positioning pin for mounting, the size should be ø1, and the height should be 1.5 or less. For Option "P" (With reverse mounting prevention pin), the size should be ø1.7, and the depth should be 2.3 or more.

When using a positioning pin for mounting, the size should be ø1, and the height should be 1.5 or less.

For Option "P" (With reverse mounting prevention pin), the size should be ø1.7, and the depth should be 2.3 or more.

2 x M2 x 0.4 Effective thread length 3 or more



9.5 ±0.1

4

 $19~^{\pm0.1}$

5.5

LVM09R4

LVM09R3, 09R6, 095R

Recommended interface dimensions * Surface roughness = Rz3.2 or less






Compact Direct Operated 2/3-Port Solenoid Valve for Chemical Liquids

LVM10/100 Series

How to Order

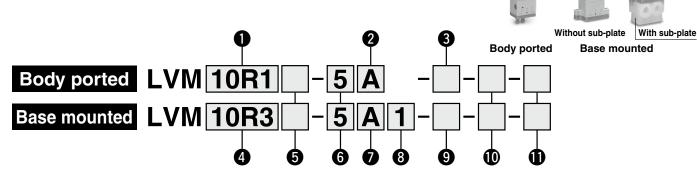

Number of ports, Valve type

| | | 0.10, | arro typo |
|--------|-----------------|-----------|---------------------------|
| Symbol | Number of ports | | Valve type |
| 10R1 | 2 | N.C. | (Symbol 1) OUT (Symbol 2) |
| 10R2 | 2 | N.O. | IN OUT (Symbol 2) |
| 102R | 3 | Universal | 1 1 2 2 W |

4 Number of ports, Valve type

| | ilibei oi p | • • • • • | |
|--------|-----------------|-----------|---------------------------|
| Symbol | Number of ports | | Valve type |
| 10R3 | | N.C. | (Symbol 1) OUT (Symbol 2) |
| 10R4 | 2 | N.O. | IN OUT (Symbol 2) |
| 10R6 | | N.C. | (Symbol 1) OUT (Symbol 3) |
| 105R | 3 | Universal | 1 1 3 W |

5 Power saving circuit

| Nil | None (Standard type) |
|-----|----------------------|
| Υ | Yes |

6 Coil voltage

| Symbol | Voltage |
|--------|---------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| | |

2 Fluid contact material

| Symbol | Plate | Diaphragm |
|--------|-------|---------------------|
| Α | PEEK | EPDM |
| В | PEEK | FKM |
| С | PEEK | Kalrez [®] |

7 Fluid contact material

| Symbol | Plate | Diaphragm |
|--------|-------|---------------------|
| Α | PEEK | EPDM |
| В | PEEK | FKM |
| С | PEEK | Kalrez [®] |
| Е | PFA | EPDM |
| F | PFA | FKM |
| G | PFA | Kalrez [®] |

9 Option

| Nil | None | |
|-----|--------------------------|--|
| 1 | Bracket | |
| 2 | Manual override | |
| 3 | Bracket, Manual override | |

^{*} Without a sub-plate, a bracket cannot be attached.

Option

| Nil | None |
|-----|--------------------------|
| 1 | Bracket |
| 2 | Manual override |
| 3 | Bracket, Manual override |

8 Sub-plate material/port size, Reverse mounting prevention pin

| Nil None Prevention pin None None Reverse mounting prevention pin | | oree means | оп рит | |
|--|----------|------------|-----------|------------------|
| None None None None None Reverse mounting prevention pin | Symbol | Sub-plate | | Reverse mounting |
| P None Yes Reverse mounting prevention pin | Syllibol | Material | Port size | prevention pin |
| P None Reverse mounting prevention pin | Nil | | | None |
| P None Reverse mounting prevention pin | | | | Yes |
| | Р | None | | Reverse mounting |
| 1 PVDF M6 | 1 | DVDE | M6 | |
| 1U 1/4-28UNF None | 1U | FVDF | 1/4-28UNF | None |
| PFA M6 | 2 | DEV | M6 | INOTIE |
| 2U 1/4-28UNF | 2U | 1 17A | 1/4-28UNF | |

- * "P," "1," and "1U" cannot be selected if the wetted parts material is "E," "F," or "G."
- * A sub-plate cannot be mounted for "P" (With reverse mounting prevention pin).

Electrical entry, Lead wire length, Light/surge voltage suppressor

| Symbol | Electrical entry, Lead wire length | Light/surge voltage suppre | ssor |
|--------|------------------------------------|---|------|
| Nil | Grommet, 300 mm | | |
| 6 | Grommet, 600 mm | Cannot be selected | |
| 10 | Grommet, 1000 mm | | |
| K | Plug connector, 300 mm | None | П |
| ко | Plug connector, Without connector | None | |
| KZ | Plug connector, 300 mm | Yes | |
| KOZ | Plug connector, Without connector | * Power saving circuit "Y" is equipped with a light/surge voltage suppressor. | |

- * The plug connector is included but does not come assembled.
- * If a lead wire length of 600 mm or more is required, select "KO_" (Without connector) and then add the connector part number shown below under the valve part number when ordering.

Plug connector part no.: AXT661 - 14A -

Lood wire longth

| | Lead wire length | |
|----|------------------|--|
| 6 | 600 mm | |
| 10 | 1000 mm | |
| 20 | 2000 mm | |
| 30 | 3000 mm | |

Mounting screws are included with the base-mounted type (without sub-plate). (2 pcs.) M2 x 11/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.

CE/UKCA-compliant

No

CE/UKCA-compliant

Kalrez[®] is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Specifications



Body ported



Without sub-plate
Base mounted



Base mounted

| Model | | Body ported | d (Tube conn | ection type) | | Base m | nounted | | |
|---------------------------------------|------------------------|-------------|---|-----------------------------|-----------------|-------------------|-----------------|-------------|-----------|
| | | | LVM10R2 | | LVM10R3 | LVM10R4 | LVM10R6 | LVM105R | |
| Valve constru | ction | | | Direct operated rocker type | | | | | |
| Valve type | | | N.C. | N.O. | Universal | N.C. | N.O. | N.C. | Universal |
| Number of por | rts | | 2 | 2 | 3 | | 2 | | 3 |
| Fluid*1 | | | | Air, Wate | r, DI water (P | ure water), D | iluent, or Clea | aning fluid | |
| Operating pres | ssure ra | nge | | | -75 | kPa to 0.25 I | MРа | | |
| Orifice diamet | er | | | | | 1.4 mm | | | |
| Response time | e* ⁷ | | | | 10 ms or les | s (at pneuma | tic pressure) | | |
| Leakage | | | | Zero leak | kage, both inte | ernal or exter | nal (at water | pressure) | |
| Proof pressure | e*2 | | | | | 0.38 MPa | | | |
| Ambient temp | erature* | ₹8 | | | | 0 to 50°C | | | |
| Fluid tempera | ture*8 | | 0 to 50°C (No freezing) | | | | | | |
| Volume of val | ve cham | ber*3 | 20 μL | | | | | | |
| Mounting orientation*4 | | :4 | Free | | | | | | |
| Enclosure | | | IP40 or equivalent | | | | | | |
| Weight | | | 34 g (Without sub-plate) 42 g (With sub-plate) | | | | | | |
| Rated voltage | | | 12, 24 VDC | | | | | | |
| Allowable voltage | ge fluctu | ation*5 | ±10% of rated voltage | | | | | | |
| Type of coil insulation | | 1 | Class B | | | | | | |
| Power Stand | | rd type | | | | 1.5 W (0.06 A) | | | |
| (When rated voltage is at 24 V) | With power saving | Inrush | | | | 2.5 W (0.1 A) | | | |
| , | circuit | | | | | 1 W | | | |
| Coil switching | Coil switching noise*6 | | 50 dB | | | | | | |

- *1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.
- *2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test
- *3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted
- *4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.
- *5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
- *6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.
- 7 In compliance with JIS B 8419:2010 (Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)
- The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.
- *8 When the diaphragm material is Kalrez®, the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).
- Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.

Flow Rate Characteristics

| Water | А | ir | |
|-------|------|-----|-----|
| Kv | Cv | С | b |
| 0.025 | 0.03 | 0.1 | 0.2 |

The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.




^{*} Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.


LVM10/100 Series

Construction


Body ported LVM10R1

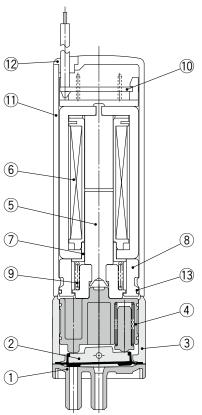

LVM10R2

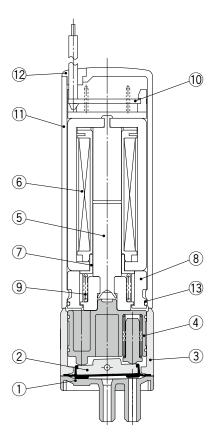

LVM102R

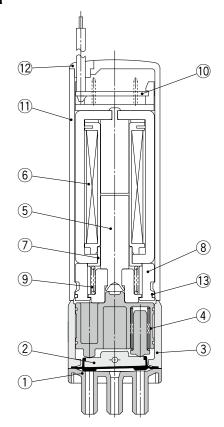


Component Parts: LVM10R1, 10R2, 102R


| No. | Description | Material |
|-----|------------------------|---------------------|
| 1 | Plate | PEEK |
| 2 | Diaphragm assembly | EPDM/FKM/Kalrez® |
| 3 | Body | PBT |
| 4 | Slide bushing assembly | PPS/Stainless steel |
| 5 | Armature assembly | Stainless steel/PBT |
| 6 | Coil assembly | _ |
| 7 | Sleeve | SUY (Iron) |
| 8 | Spacer | PBT |
| 9 | Return spring | Stainless steel |
| 10 | Board assembly | _ |
| 11 | Casing | PBT |
| 12 | Plug | NBR |
| 13 | O-ring | NBR |
| | | |

^{*} Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.




Construction




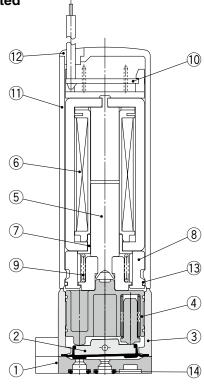


LVM10R4

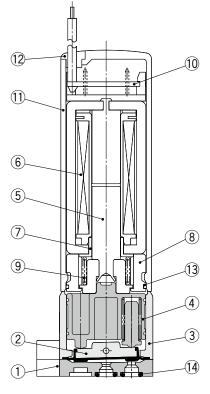

LVM10R6

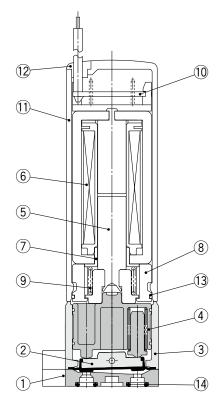

LVM105R

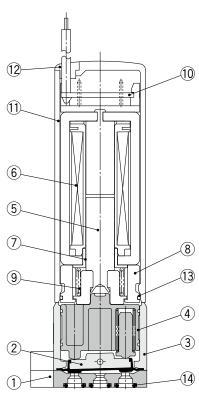

Component Parts: LVM10R3, 10R4, 10R6, 105R

| No. | Description | Material |
|-----|------------------------|---------------------|
| 1 | Plate | PEEK/PFA |
| 2 | Diaphragm assembly | EPDM/FKM/Kalrez® |
| 3 | Body | PBT |
| 4 | Slide bushing assembly | PPS/Stainless steel |
| 5 | Armature assembly | Stainless steel/PBT |
| 6 | Coil assembly | _ |
| 7 | Sleeve | SUY (Iron) |
| | | |

| Description | Material |
|----------------|--|
| Spacer | PBT |
| Return spring | Stainless steel |
| Board assembly | _ |
| Casing | PBT |
| Plug | NBR |
| O-ring | NBR |
| O-ring | EPDM/FKM/Kalrez® |
| | Spacer Return spring Board assembly Casing Plug O-ring |

Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM10/100 Series

Dimensions


Body ported


LVM10R1-□□-□ (N.C.)

LVM10R2-□□-□ (N.O.)


LVM102R-□□-□ (Universal)



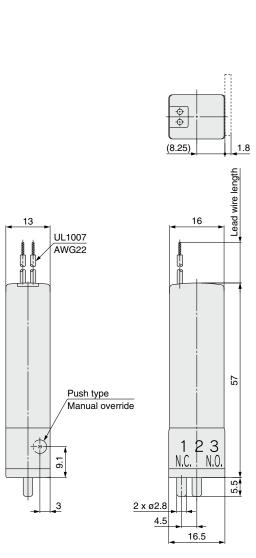


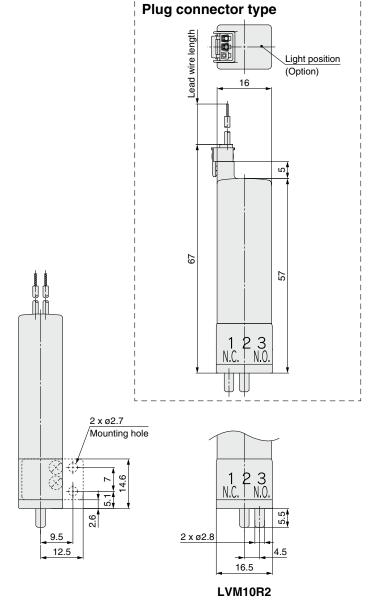

* The broken lines indicate the model with a bracket.




Dimensions




LVM10R4-□□-□ (N.O.)

LVM10R6-□□-□ (N.C.)


LVM105R-□□-□ (Universal)

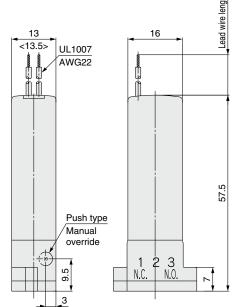






ø1.5, height 2

LVM10R4

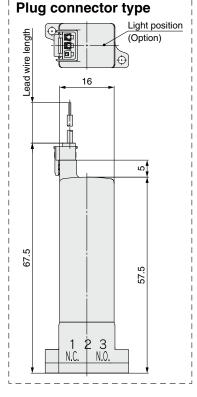








* The figures in brackets < > indicate the values when PFA is selected as the plate material (wetted parts material "E," "F," or "G"). When PFA is selected as the plate material (wetted parts material "E," "F," or "G"), there is no ø1.6 positioning hole or ø1.5 reverse mounting prevention pin.

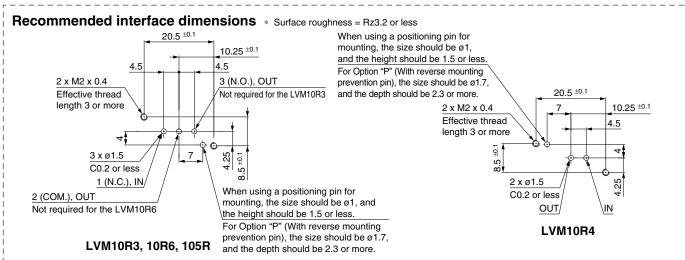

LVM10/100 Series

Dimensions


Base mounted, With sub-plate


LVM10R3-□□-□ (N.C.)


LVM10R4-□□□-□ (N.O.)


LVM10R6-□□□-□ (N.C.)


LVM105R-□□□-□ (Universal)

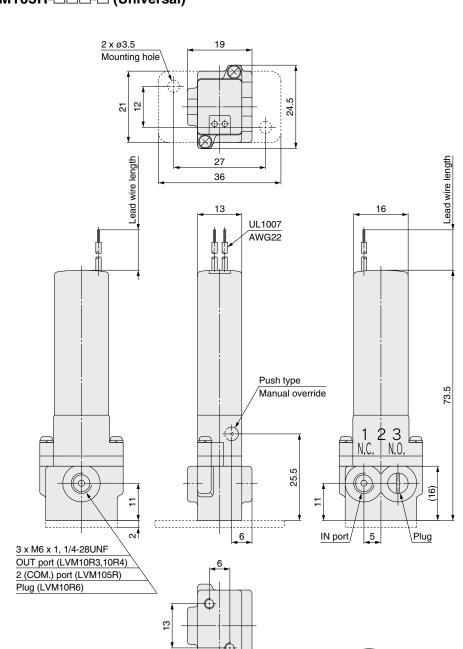

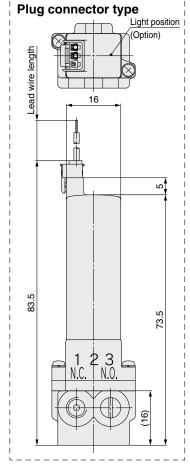








2 x M3 x 0.5 thread length 5 For direct mounting





* The broken lines indicate the model with a bracket.




M6 x 1, 1/4-28UNF ø3.8

Compact Direct Operated [Option] 2/3-Port Solenoid Valve for Chemical Liquids

LVM15/150 Series







Without sub-plate With sub-plate

Coil voltage

Voltage

24 VDC

12 VDC

Symbol

5

6

Number of ports, Valve type

| Symbol | Number of ports | - | Valve type |
|--------|-----------------|-----------|-------------------|
| 15R3 | | N.C. | IN OUT (Symbol 2) |
| 15R4 | 2 | N.O. | IN OUT (Symbol 2) |
| 15R6 | | N.C. | IN OUT (Symbol 3) |
| 155R | 3 | Universal | 1 2 |

Max. operating pressure, Power saving circuit

| Symbol | Max. operating pressure | Power saving circuit |
|--------|------------------------------|----------------------|
| Υ | 0.25 MPa (Standard type) | Yes |
| HY | 0.6 MPa (High-pressure type) | Yes |

4 Fluid contact material

| Symbol | Plate | Diaphragm |
|--------|-------|---------------------|
| Α | PEEK | EPDM |
| В | PEEK | FKM |
| С | PEEK | Kalrez [®] |

5 Sub-plate material/port size, Reverse mounting prevention pin

| Symbol | Sub-plate | | Reverse mounting |
|--------|-----------|-----------|------------------|
| Symbol | Material | Port size | prevention pin |
| Nil | | | None |
| | | None | |
| Р | No | | |
| 1 | PVDF | M6 | None |
| 1U | FVDF | 1/4-28UNF | inone |

^{*} A sub-plate cannot be mounted for "P" (With reverse mounting prevention pin).

6 Electrical entry, Lead wire length, Light/surge voltage suppressor

| Symbol | Electrical entry, Lead wire length | Light/surge voltage suppressor | |
|--------|------------------------------------|--------------------------------|--|
| Nil | Grommet, 300 mm | Cannot be selected | |
| 6 | Grommet, 600 mm | | |
| 10 | Grommet, 1000 mm | | |
| KZ | Plug connector, 300 mm | Yes | |
| кох | Plug connector, Without connector | tes | |

CE/UKCA-compliant

| Nil | No |
|-----|-------------------|
| Q | CE/UKCA-compliant |

The plug connector is included but does not come assembled.

If a lead wire length of 600 mm or more is required, select "KOZ" (Without connector) and then add the connector part number shown below under the valve part number when ordering.

Plug connector part no.: AXT661 - 14A -

Lead wire length

| | Lead wife length |
|----|------------------|
| 6 | 600 mm |
| 10 | 1000 mm |
| 20 | 2000 mm |
| 30 | 3000 mm |

Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Mounting screws are included for models without sub-plate. (2 pcs.) M2.5 x 14/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.



LVM15/150 Series

Specifications



Without sub-plate



With sub-plate

| | | | | Base m | ounted | |
|---------------------------------------|----------------------|-----------|---|-------------------------|---------------------------|-----------|
| Model | | LVM15R3 | LVM15R4 | LVM15R6 | LVM155R | |
| Valve construction | | | | Direct operate | ed rocker type | |
| Valve type | | | N.C. | N.O. | N.C. | Universal |
| Number of po | rts | | | 2 | | 3 |
| Fluid*1 | | | Air, W | ater, DI water (Pure wa | ter), Diluent, or Cleanin | g fluid |
| Operating | Standa | rd type | | -75 kPa to | 0.25 MPa | |
| pressure range | High-pres | sure type | | Max. 0.6 | 6 MPa*7 | |
| Orifice | Standa | rd type | | 1.6 | mm | |
| diameter | High-pres | sure type | | 1 n | nm | |
| Response tim | e*8 | | | 15 ms or less (at p | neumatic pressure) | |
| Leakage | | | Zero leakage, both internal or external (at water pressure) | | | |
| Proof | Standa | rd type | 0.38 MPa | | | |
| pressure*2 | High-pres | sure type | 0.9 MPa | | | |
| Ambient temp | erature | *9 | 0 to 50°C | | | |
| Fluid tempera | ture*9 | | 0 to 50°C (No freezing) | | | |
| Volume of val | ve chan | nber*3 | 50 | μL | 60 μL | 50 μL |
| Mounting orie | ntation ³ | ¥4 | Free | | | |
| Enclosure | | | IP40 or equivalent | | | |
| Weight | | | 45 g (Without sub-plate), 56 g (With sub-plate) | | | |
| Rated voltage | | | 12, 24 VDC | | | |
| Allowable voltage fluctuation*5 | | ation*5 | ±10% of rated voltage | | | |
| Type of coil insulation | | n | Class B | | | |
| Power consumption (When rated voltage | | Inrush | 5.5 W (0.23 A) | | | |
| is at 24 V) | ugo | Holding | | 1 W | | |
| Coil switching noise*6 | | | 60 dB | | | |
| Con switching noise | | | | 00 | <u> </u> | |

- *1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.
- *2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test
- *3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted
- *4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.
- *5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
- *6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.
- *7 The high-pressure type can also be used at a pressure level of up to -75 kPa. However, set the maximum operating pressure so that a difference in operating pressure becomes 0.6 MPa or less.

 Example) When the valve is used at -50 kPa, the maximum operating pressure is up to 0.55 MPa.
- *8 In compliance with JIS B 8419:2010 (Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)
 - The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.
- *9 When the diaphragm material is Kalrez[®], the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).
- * Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.

Flow Rate Characteristics


| Wate | А | ir | |
|------------------|-----------------|----------------|---------------|
| Kv | Cv | С | b |
| 0.034 [0.012] | 0.04 [0.015] | 0.13 [0.05] | 0.22 [0.2] |

The [] indicate the values of the high-pressure type.

* The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.


^{*} Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



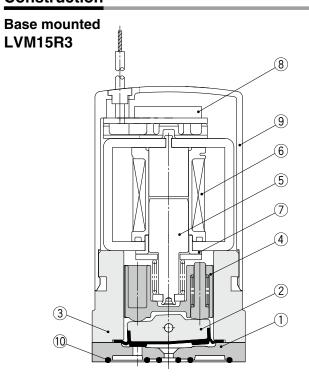

EVM15R4 8 9 6 7 7 10

8 9 9 6 5 7

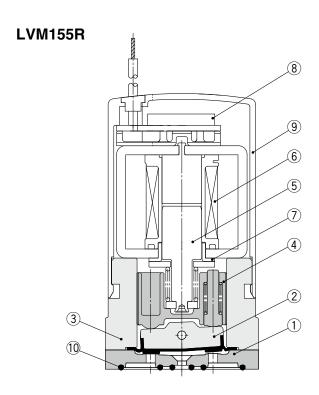

Component Parts: LVM15R3, 15R4, 15R6, 155R

| | P | , , |
|-----|------------------------|---------------------|
| No. | Description | Material |
| 1 | Plate | PEEK |
| 2 | Diaphragm assembly | EPDM/FKM/Kalrez® |
| 3 | Body | PBT |
| 4 | Slide bushing assembly | PPS/Stainless steel |
| 5 | Armature assembly | _ |
| 6 | Coil assembly | _ |
| 7 | Sleeve | SUY (Iron) |
| 8 | Board assembly | _ |
| 9 | Casing | PBT |
| 10 | Interface gasket | EPDM/FKM/Kalrez® |
| | | |

Kalrez[®] is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



LVM15/150 Series

Dimensions Base mounted, Without sub-plate Plug connector type **LVM15R3-**□□-□ (N.C.) **LVM15R4-**□□-□ (N.O.) wire length **LVM15R6-**□□**-**□ (N.C.) LVM155R-□□-□ (Universal) 27 21.5 Light position (Option) 2 x ø2.7 Mounting hole 6 -ead wire length 16 59.7 UL1007 48.6 AWG22 N.C. N.O. 48.6 ø1.4 depth 2.3 For Option "P" (With reverse mounting prevention pin): ø2, height 2 \otimes +N.O. Max. 9 Max. 9 Min. 5.5 Min. 5.5 LVM15R6 ø1.4 depth 2.3 ø1.4 depth 2.3 ø1.4 depth 2.3 For Option "P" For Option "P" For Option "P" (With reverse mounting (With reverse mounting (With reverse mounting prevention pin): prevention pin): prevention pin): ø2, height 2 ø2, height 2 ø2, height 2 . 2.5 Max. ; Max. 9 Max. 9 Max. 9 Max. 9 Min. 5.5 Min. 5.5 Min. 5.5 Min. 5.5 LVM155R LVM15R3 LVM15R4 Recommended interface dimensions * Surface roughness = Rz3.2 or less 21.5 ±0.1 21.5 ±0.1 10.75 ±0.1 10.75 ±0.1 Max. 9 Max. 9 Max. 9 . 2.5 Min. 5.5 Min. 5.5 2 x M2.5 x 0.45 Min. 5.5 0 10.5 Effective thread Max. Min. 2 x M2.5 x 0.45 Αij. 5.25 length 4 or more Effective thread length 4 or more 6 5.25 3 x ø2.1 4.5 /3 (N.O.), OUT 2 x ø2.1 /IN 4.5 C0.2 or less Not required for the LVM15R3 C0.2 or less 1 (N.C.), IN \2 (COM.), OUT Not required for the LVM15R6 When using a positioning pin for mounting, the size When using a positioning pin for mounting, the size

be 2.3 or more.

should be ø1.2, and the height should be 2 or less.

For Option "P" (With reverse mounting prevention

pin), the size should be ø2.2, and the depth should

LVM15R4

be 2.3 or more.

should be Ø1.2, and the height should be 2 or less.

For Option "P" (With reverse mounting prevention

pin), the size should be ø2.2, and the depth should

LVM15R3, 15R6, 155R

Dimensions


Base mounted, With sub-plate


LVM15R3-□□-□ (N.C.)


LVM15R4-□□□-□ (N.O.)


LVM15R6-□□□-□ (N.C.)


LVM155R-□□□-□ (Universal)

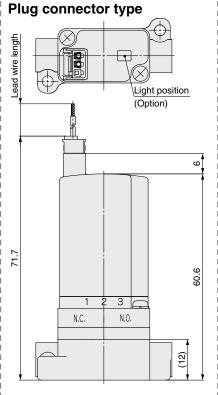





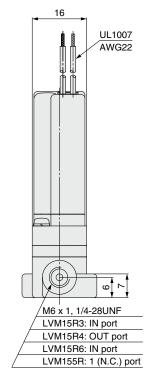



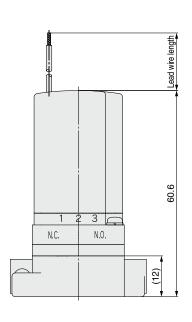



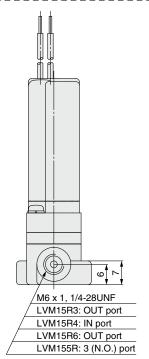


C E UK



Compact Direct Operated [Option] 2/3-Port Solenoid Valve for Chemical Liquids

LVM20/200 Series

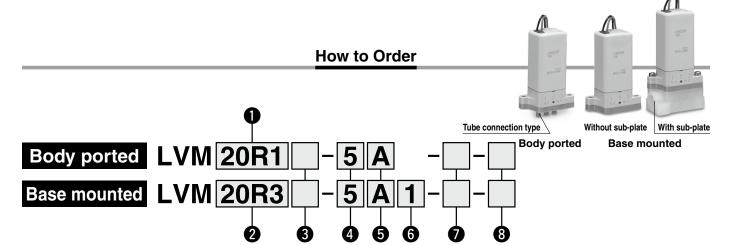

Number of ports, Valve type

| | | | - 71 |
|--------|-----------------|-----------|-------------------|
| Symbol | Number of ports | | Valve type |
| 20R1 | 2 | N.C. | IN OUT (Symbol 2) |
| 20R2 | | N.O. | IN OUT (Symbol 2) |
| 202R | 3 | Universal | 1 2 |

2 Number of ports, Valve type

| Symbol | Number of ports | | Valve type |
|--------|-----------------|-----------|---------------------------|
| Symbol | Number of ports | | valve type |
| 20R3 | 2 | N.C. | IN OUT (Symbol 2) |
| 20R4 | | N.O. | (Symbol 3) OUT (Symbol 2) |
| 205R | 3 | Universal | 1 2 |

Power saving circuit

| Nil | None (Standard type) |
|-----|----------------------|
| Υ | Yes |

4 Coil voltage

| S | Symbol | Voltage |
|---|--------|---------|
| | 5 | 24 VDC |
| | 6 | 12 VDC |

5 Fluid contact material

| Plate | Diaphragm |
|-------|---------------------|
| PEEK | EPDM |
| PEEK | FKM |
| PEEK | Kalrez [®] |
| | PEEK PEEK |

6 Sub-plate material/port size, Reverse mounting prevention pir

| Re | Reverse mounting prevention pin | | | | |
|--------|---------------------------------|---------------------------------|----------------|--|--|
| Symbol | Sub- | Reverse mounting | | | |
| Symbol | Material | Port size | prevention pin | | |
| Nil | | None | | | |
| | | | Yes | | |
| P | No | Reverse mounting prevention pin | | | |
| 1 | | Rc1/8 | | | |
| 1F | PVDF | G1/8 | None | | |
| 1N | | NPT1/8 | | | |

* A sub-plate cannot be mounted for "P" (With reverse mounting prevention pin).

8 CE/UKCA-compliant

| C C C C C C C C C C C C C C C C C C C | | |
|---------------------------------------|-------------------|--|
| Nil | No | |
| Q | CE/UKCA-compliant | |

Telectrical entry, Lead wire length, Light/surge voltage suppressor

| | 2 ioonical chay, 2caa in chongan, 2ging cargo venago cappi cocci | | | |
|--------|--|---|---------|--|
| Symbol | Electrical entry, Lead wire length | Light/surge voltage sup | pressor | |
| Nil | Grommet, 300 mm | | | |
| 6 | Grommet, 600 mm Cannot be selected | | ed | |
| 10 | Grommet, 1000 mm | | | |
| K | Plug connector, 300 mm | None | | |
| ко | Plug connector, Without connector | None | m | |
| KZ | Plug connector, 300 mm | Yes * Power saving circuit "Y" is | | |
| KOZ | Plug connector, Without connector | equipped with a light/surge voltage suppressor. | | |

* The plug connector is included but does not come assembled.

* If a lead wire length of 600 mm or more is required, select "KO□" (Without connector) and then add the connector part number shown below under the valve part number when ordering

Plug connector part no.: AXT661 − 14A − 🔲

Lead wire length

| 6 | 600 mm |
|----|---------|
| 10 | 1000 mm |
| 20 | 2000 mm |
| 30 | 3000 mm |


Mounting screws are included with the base-mounted type (without sub-plate). (2 pcs.) M3 x 14/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.

Kalrez[®] is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



Specifications





Without sub-plate Base mounted



| Model | | Body ported (Tube connection type) | | | Base mounted | | | |
|--|-------------------|---|---------|-----------|---|---------|-----------|--|
| | | LVM20R1 | LVM20R2 | LVM202R | LVM20R3 | LVM20R4 | LVM205R | |
| Valve construction | | Direct operated rocker type | | | | | | |
| Valve type | | N.C. | N.O. | Universal | N.C. | N.O. | Universal | |
| Number of ports | | 2 | | 3 | 2 3 | | 3 | |
| Fluid*1 | | Air, Water, DI water (Pure water), Diluent, or Cleaning fluid | | | | | | |
| Operating pressure range | | -75 kPa to 0.25 MPa | | | -75 kPa to 0.3 MPa | | | |
| Orifice diameter | | 2 mm | | | | | | |
| Response time*7 | | 20 ms or less (at pneumatic pressure) | | | | | | |
| Leakage | | Zero leakage, both internal or external (at water pressure) | | | | | | |
| Proof pressure*2 | | 0.38 MPa | | | 0.45 MPa | | | |
| Ambient temperature*8 | | 0 to 50°C | | | | | | |
| Fluid temperature*8 | | 0 to 50°C (No freezing) | | | | | | |
| Volume of valve chamber*3 | | 84 μL | | | | | | |
| Mounting orientation*4 | | Free | | | | | | |
| Enclosure | | IP40 or equivalent | | | | | | |
| Weight | | 80 g | | | 80 g (Without sub-plate), 94 g (With sub-plate) | | | |
| Rated voltage | | 12, 24 VDC | | | | | | |
| Allowable voltage fluctuation*5 | | ±10% of rated voltage | | | | | | |
| Type of coil insulation | | Class B | | | | | | |
| Power | Standard type | 2.5 W | | | | | | |
| consumption (When rated voltage is at 24 V) | Standard type | (0.1 A) | | | | | | |
| | With power Inrush | 4 W | | | | | | |
| | saving | (0.17 A) | | | | | | |
| | circuit Holding | 0.6 W | | | | | | |
| Coil switching noise*6 | | 60 dB | | | | | | |

- *1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.
- *2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test
- *3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted
- *4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.
- *5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
- *6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.
- *7 In compliance with JIS B 8419:2010 (Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)
 - The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.
- *8 When the diaphragm material is Kalrez®, the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).
- * Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.

Flow Rate Characteristics

| Water | Air | | |
|-------|-------|------|------|
| Kv | Cv | С | b |
| 0.055 | 0.065 | 0.23 | 0.27 |


The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.




^{*} Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.


LVM20/200 Series

Construction

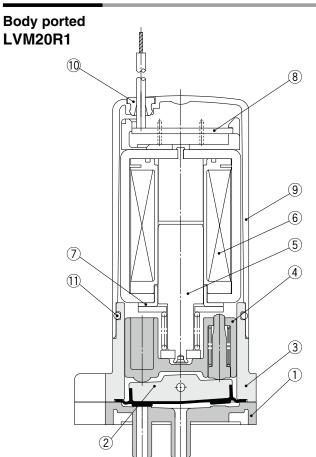

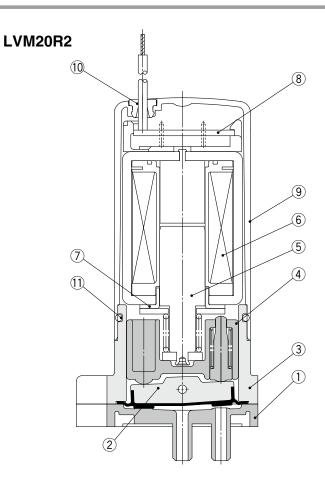

LVM202R

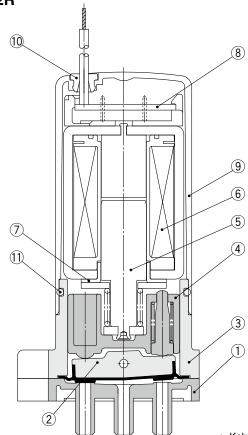


Component Parts: LVM20R1, 20R2, 202R


| | | , - , - |
|-----|------------------------|---------------------|
| No. | Description | Material |
| 1 | Plate | PEEK |
| 2 | Diaphragm assembly | EPDM/FKM/Kalrez® |
| 3 | Body | PBT |
| 4 | Slide bushing assembly | PPS/Stainless steel |
| 5 | Armature assembly | _ |
| 6 | Coil assembly | _ |
| 7 | Sleeve | SUY (Iron) |
| 8 | Board assembly | _ |
| 9 | Casing | PBT |
| 10 | Plug | NBR |
| 11 | O-ring | NBR |
| | | |

 $\ast\;$ Kalrez $\!\!^{\text{@}}$ is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



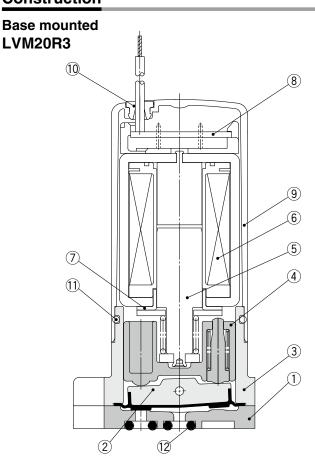

LVM205R

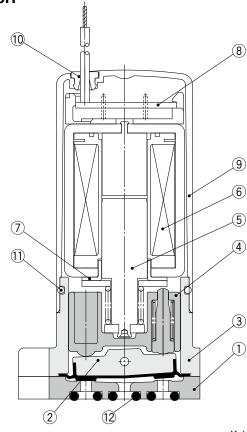

Component Parts: LVM20R3, 20R4, 205R

| No. | Description | Material | |
|-----|------------------------|---------------------|--|
| 1 | Plate | PEEK | |
| 2 | Diaphragm assembly | EPDM/FKM/Kalrez® | |
| 3 | Body | PBT | |
| 4 | Slide bushing assembly | PPS/Stainless steel | |
| 5 | Armature assembly | _ | |
| 6 | Coil assembly | _ | |
| 7 | Sleeve | SUY (Iron) | |
| 8 | Board assembly | _ | |
| 9 | Casing | PBT | |
| 10 | Plug | NBR | |
| 11 | O-ring | NBR | |
| 12 | O-ring | EPDM/FKM/Kalrez® | |
| | | - | |

 $\ast\;$ Kalrez $\!\!^{\otimes}\!\!$ is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



LVM20/200 Series

Dimensions


Body ported


LVM20R1-□□-□ (N.C.)


LVM20R2-□□-□ (N.O.)


LVM202R-□□-□ (Universal)



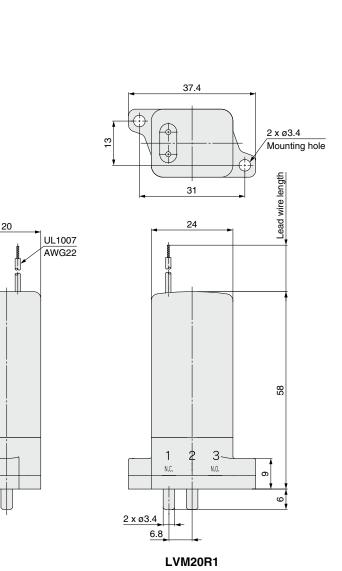

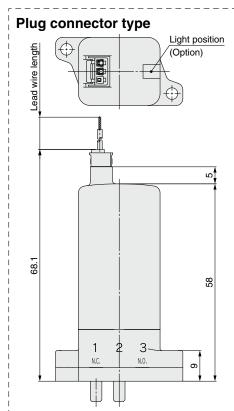





LVM202R


Dimensions


Base mounted, Without sub-plate


LVM20R3-□□-□ (N.C.)

LVM20R4-□□-□ (N.O.)




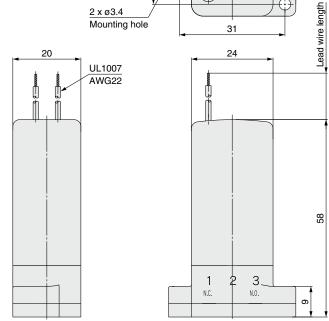

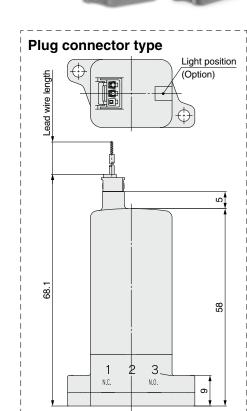




LVM205R





ø2 depth 3
For Option "P"
(With reverse mounting prevention pin):

LVM20R4

ø2.5. height 2



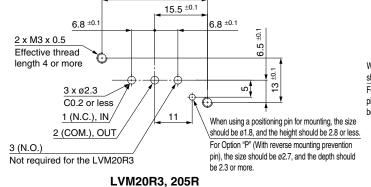

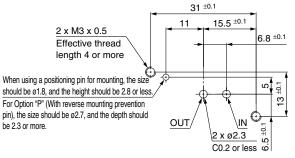

LVM20R4

LVM20/200 Series

Dimensions

Base mounted, With sub-plate

LVM20R3-□□-□ (N.C.)

LVM20R4-□□□-□ (N.O.)

20


1/8 (Rc/G/NPT)

LVM20R3: IN port

LVM20R4: OUT port

UL1007 AWG22


LVM205R-□□□-□ (Universal)





Lead wire length


74

(20)

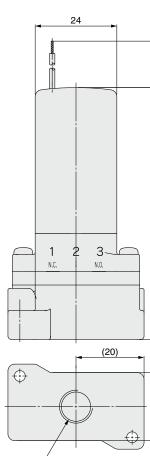

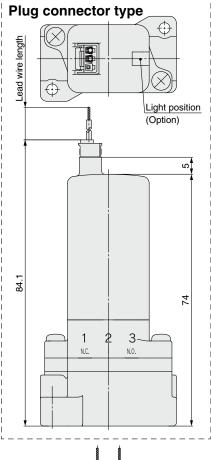

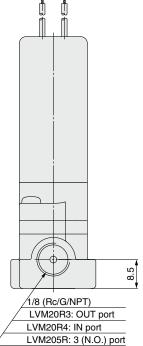

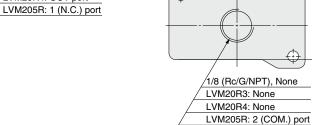






Compact Direct Operated 2/3-Port Solenoid Valve for Chemical Liquids with Power Saving Circuit

LVM11/13 Series

How to Order



Body ported Base mounted

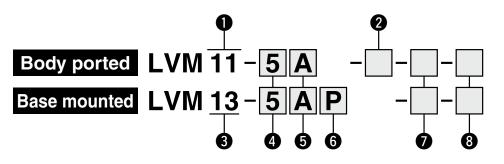

Number of ports, Valve type

| Symbol | Number of ports | Valve type | |
|--------|-----------------|------------|--------|
| 11 | 2 | N.C. | OUT IN |

2 Option

| Nil | None | |
|-----|---------|--|
| 1 | Bracket | |

3 Number of ports, Valve type

| Symbol | Number of ports | Valve type | | |
|--------|-----------------|------------|-----|--|
| 13 | 2 | N.C. | OUT | |

4 Coil voltage

| Symbol | Voltage |
|--------|---------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| | |

5 Fluid contact material

| Body | Diaphragm |
|------|---------------------|
| PEEK | EPDM |
| PEEK | FKM |
| PEEK | Kalrez [®] |
| | PEEK PEEK |

6 Reverse mounting prevention pin

| Nil | None | | |
|-----|---------------------------------|--|--|
| | Yes | | |
| Р | Reverse mounting prevention pin | | |

Electrical entry, Lead wire length, Light/surge voltage suppressor

| Sym | ibol | Electrical entry, Lead wire length | Light/surge voltage suppressor | | |
|-----|-----------------------------------|------------------------------------|--------------------------------|--|--|
| N | il | Grommet, 300 mm | | | |
| 6 | ; | Grommet, 600 mm | Cannot be selected | | |
| 10 | 0 | Grommet, 1000 mm | <u> </u> | | |
| K | Z | Plug connector, 300 mm | Yes | | |
| КС | Plug connector, Without connector | | tes | | |

- * The plug connector is included but does not come assembled.
- * If a lead wire length of 600 mm or more is required, select "KOZ" (Without connector) and then add the connector part number shown below under the valve part number when ordering.

Plug connector part no.: AXT661 − 14A − □

Lead wire length

| 6 | 600 mm |
|----|---------|
| 10 | 1000 mm |
| 20 | 2000 mm |
| 30 | 3000 mm |

Mounting screws are included with the base-mounted type. (2 pcs.) M2 x 11/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.

Kalrez[®] is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



LVM07

1VM09/090

_VM10/100

LVM15/150

LVM20/200

8 CE/UKCA-compliant

No CE/UKCA-compliant

LVM11/13

LVM11/13 Series

Specifications



Body ported



Base mounted

| | | | 5.1 | | |
|---------------------------------------|-----------------|---------|---|--------------------------------|--|
| Mod | del | | Body ported | Base mounted | |
| | | | LVM11 | LVM13 | |
| Valve construction | | | Direct operated poppet type | | |
| Valve type | | | N.C. | | |
| Number of ports | | | 2 | | |
| Fluid*1 | | | Air, Water, DI water (Pure water), Diluent, or Cleaning fluid | | |
| Operating pres | ssure ra | nge | 0 to 0.2 | 25 MPa | |
| Orifice diamete | er | | 1.5 | mm | |
| Response time | e* ⁷ | | 10 ms or less (at pr | neumatic pressure) | |
| Leakage | | | Zero leakage, both internal o | r external (at water pressure) | |
| Proof pressure | e *2 | | 0.38 MPa | | |
| Ambient tempe | erature* | :8 | 0 to 50°C | | |
| Fluid temperat | ture*8 | | 0 to 50°C (No freezing) | | |
| Volume of valv | ve cham | ber*3 | 11 μL | 13 μL | |
| Mounting orientation*4 | | | Fr | ee | |
| Enclosure | | | IP40 or e | quivalent | |
| Weight | | | 30 g | | |
| Rated voltage | | | 12, 24 VDC | | |
| Allowable voltag | ge fluctu | ation*5 | ±10% of rated voltage | | |
| Type of coil in | sulation | 1 | Class B | | |
| Power | With | | 2.5 | W | |
| consumption | power | Inrush | (0.1 | A) | |
| (When rated voltage is at 24 V) | saving circuit | Holding | 1 | w | |
| Coil switching noise*6 | | | 50 dB | | |

- *1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.
- *2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test
- *3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted
- *4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.
- *5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
- *6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.
- *7 In compliance with JIS B 8419:2010 (Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)
- The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.

 8 When the diaphragm material is Kalrez[®], the valve changeover time will be significantly longer at ambient and fluid
- temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).

 * Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.


Flow Rate Characteristics

| Water | А | ir | |
|-------|------|------|------|
| Kv | Cv | С | b |
| 0.034 | 0.04 | 0.13 | 0.22 |

The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.



^{*} Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

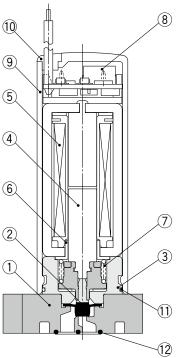

Component Parts: LVM11

| Description | Material | | | |
|--------------------|--|--|--|--|
| Body | PEEK | | | |
| Diaphragm assembly | EPDM/FKM/Kalrez® | | | |
| Spacer | PBT | | | |
| Armature assembly | Stainless steel/POM | | | |
| Coil assembly | _ | | | |
| Sleeve | SUY (Iron) | | | |
| Return spring | Stainless steel | | | |
| Board assembly | _ | | | |
| Casing | PBT | | | |
| Plug | NBR | | | |
| O-ring | NBR | | | |
| | Body Diaphragm assembly Spacer Armature assembly Coil assembly Sleeve Return spring Board assembly Casing Plug | | | |

Component Parts: LVM13

| Joinpondit Farto: Evilino | | | | |
|---------------------------|--------------------|---------------------|--|--|
| No. | Description | Material | | |
| 1 | Body | PEEK | | |
| 2 | Diaphragm assembly | EPDM/FKM/Kalrez® | | |
| 3 | Spacer | PBT | | |
| 4 | Armature assembly | Stainless steel/POM | | |
| 5 | Coil assembly | _ | | |
| 6 | Sleeve | SUY (Iron) | | |
| 7 | Return spring | Stainless steel | | |
| 8 | Board assembly | _ | | |
| 9 | Casing | PBT | | |
| 10 | Plug | NBR | | |
| 11 | O-ring | NBR | | |
| 12 | Gasket | EPDM/FKM/Kalrez® | | |

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



LVM11/13 Series

Dimensions Body ported LVM11-□□-□ (N.C.) ф Ф 25.4 Plug connector type 9 Lead wire length 2 x ø3.2 Lead wire length Mounting hole Light position (Option) UL1007 AWG22 62.5 52.5 52.5 M5 x 0.8 x 3.5 M5 x 0.8 x 3.5 OUT port IN port $\langle \neg$

coche 47


16

Dimensions


Base mounted


LVM13-□□-□ (N.C.)







28

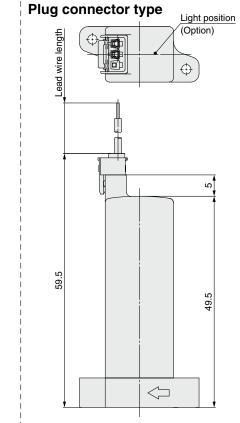

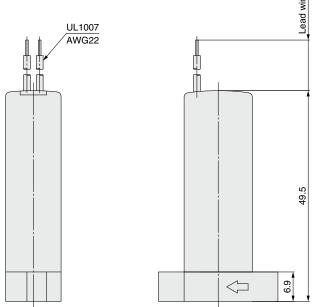




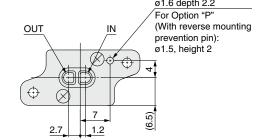





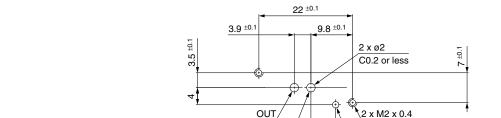

IN, 5.8 ±0.1

Recommended interface dimensions * Surface roughness = Rz3.2 or less

Effective thread length 3 or more When using a positioning pin for mounting, the size should be ø1, and the height should be 1.5 or less.

For Option "P" (With reverse mounting prevention pin), the size should be ø1.7, and the depth should be 2.3 or more.

SMC



LVM Series Specific Product Precautions 1

Be sure to read this before handling the products. Please contact SMC when it is used in conditions other than the specifications.

Design / Selection

⚠ Warning

1. Do not use this product in applications which may adversely affect human life (e.g. medical equipment connected to the human body for drip infusion).

2. Confirm the specifications.

Give careful consideration to the operating conditions, such as the application, fluid, and environment, and use within the specified operating ranges indicated in the catalog.

3. Fluid

Be sure to confirm the compatibility between the component material and the fluid.

4. Ensure sufficient space for maintenance activities.

When installing the products, allow access for maintenance and inspection.

5. Fluid pressure range

Fluid pressure should be within the allowable pressure range.

6. Ambient environment

Use within the allowable ambient temperature range. Be sure that the liquid or corrosive gas does not touch the external surface of the product.

7. Countermeasures against static electricity

Take measures to prevent static electricity since some fluids can cause static electricity.

8. Pressure (including vacuum) holding

It is not usable for an application such as holding the pressure (including vacuum) inside of a pressure vessel because air leakage is entailed in a valve.


9. Cannot be used as an emergency shut-off valve, etc.

The valves presented in this catalog are not designed for safety applications such as an emergency shut-off valve. If the valves are used in this type of system, other reliable safety assurance measures should also be adopted.

10. Extended periods of continuous energization

If solenoid valves are to be continuously energized for extended periods of time, use valves with power saving circuits to minimize the amount of heat released by the coil.

Power saving circuit waveform (example)

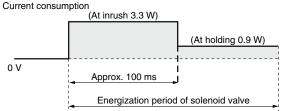

- * Power consumption for the waveform shown above is that of the LVM09/090.
- For the LVM15/150, the type with power saving circuit is standard.
- * For the LVM10/100, the inrush is 50 ms.

When a solenoid valve without a power saving circuit is continuously energized for long periods of time, temperature increase from coil heat release can result in worsening performance and shortened service life of the solenoid valve, as well as adverse effects on peripheral equipment in the vicinity. For this reason, when valves are to be continuously energized for extended periods, use a fan or take other measures to disperse heat and keep valve surface temperatures at $70\,^{\circ}\text{C}$ or less.

The table below shows reference values for continuously energized valves (single unit) when surface temperature is 70°C or less.

| Model | LVM09/090 | LVM10/100 | LVM20/200 |
|-----------------------------------|----------------|-----------------|-----------------|
| Period of continuous energization | 5 min. or less | 30 min. or less | 30 min. or less |
| Duty ratio | 50% or less | | |
| Ambient temperature | | 25°C or less | |
| Power saving circuit | | None | |

- * Duty ratio: ON time/(ON time + OFF time)
- * For the LVM15/150, the type with power saving circuit is standard.

Please use a fan or take other measures to disperse heat and keep temperatures within the specified range when mounting the solenoid valves inside control panels, etc. Be especially careful when using three or more adjacent valves with manifolds and keeping them continuously energized for extended period, as this may result in dramatic increases in temperature.

11. Low temperature environments

Be aware that the valve changeover time becomes extremely long when the ambient and fluid temperature becomes 15°C or less as a reference when compared to the valve changeover time at room temperature (approx. 25°C). Diaphragm material: Kalrez®

 Kalrez[®] is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Selection

⚠ Caution

1. Leakage voltage

The leakage voltage should be 2% or less of the rated voltage. If the leakage voltage exceeds this value, solenoid valve may not turn OFF.

Valves with a power saving circuit (PWM circuit built-in type)

Valves with a power saving circuit (PWM circuit built-in type) perform the high-speed switching operation with the PWM control circuit inside the valve after the rated power has been applied for several tens of ms to reduce the power consumption. The problems shown below may occur in this type of valve due to the switch or drive circuit system by the PWM control. Be sure to check the operation with the customer's machine sufficiently when selecting the product.

- 1) The valve does not turn ON.
 - If the PWM circuit built-in type valve is driven by a mechanical relay, etc., and chattering occurs during the several tens of ms necessary for the valve to reach its rated voltage, the valve may not turn ON correctly.
 - If a filter, etc., is connected between the power supply and the PWM circuit built-in type valve, the current necessary to drive the valve lowers due to the effects of the filter, and then the valve may not turn ON correctly.
- 2) The valve does not turn OFF.

If the PWM circuit built-in type valve is driven by the photo coupler, the photo coupler cannot turn OFF and the valve is kept in an ON state. Therefore, take great care when using the photo coupler built-in SSR (solid state relay) or drive circuit.





LVM Series Specific Product Precautions 2

Be sure to read this before handling the products. Please contact SMC when it is used in conditions other than the specifications.

Mounting

∧ Caution

1. Always tighten threads with the proper tightening torque.

When mounting the solenoid valve, tighten it with the proper tightening torque shown below.

Tightening Torque for Base Mounting

| Location | Model | Thread size | Proper tightening torque [N·m] |
|----------|---------------------------|-------------|--------------------------------|
| | LVM07R6 | M1.6 | 0.06 to 0.1 |
| Base | LVM09R3, 09R4, 09R6, 095R | M2 | 0.1 to 0.14 |
| mounted, | LVM13 | M2 | 0.15 to 0.2 |
| Body | LVM10R3, 10R4, 10R6, 105R | M2 | 0.15 to 0.2 |
| mounting | LVM15R3, 15R4, 15R6, 155R | M2.5 | 0.25 to 0.35 |
| | LVM20R3, 20R4, 205R | МЗ | 0.4 to 0.6 |

- 2. Mount the solenoid valve on the horizontal surface.

 Applicable model: All models
- Remove dust from the solenoid valve mounting surface completely. The surface roughness of the mounting surface should be Rz3.2 or less.

Applicable model: Base mounted

4. When mounting the solenoid valves next to each other, the valve pitch should be the value or more shown in the table below.

| Model | LVM07 | LVM09/090 | LVM13 | LVM10/100 | LVM15/150 | LVM20/200 |
|-------------|-------|-----------|-------|-----------|-----------|-----------|
| Valve pitch | 8 | 10.5 | 14 | 14 | 17 | 21 |

Applicable model: All models

⚠ Warning

If air leakage increases or equipment does not operate properly, stop operation.

After mounting, perform suitable function and leak tests to confirm that the mounting is correct.

Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended.

When residual liquid need not be taken into consideration, any mounting orientation is available.

Piping

⚠ Caution

1. Preparation before piping

Before piping is connected, it should be thoroughly blown out with air (flushing) or washed to remove chips, cutting oil, and other debris from inside the pipe.

Piping

⚠ Caution

2. When tubing is connected to the body-ported solenoid valve, insert the tubing straight to the end of the tube inlet for a complete fit.

Select appropriate tubing while referring to the table below.

| Model | | Tubing outside diameter (O.D.) (after mounting) |
|---------------------|--------------|---|
| LVM09R1, 09R2, 092R | ø1.9 or less | ø4.2 or less |
| LVM10R1, 10R2, 102R | ø2.5 or less | ø4.5 or less |
| LVM20R1, 20R2, 202R | ø3.1 or less | ø6.8 or less |

The holding force varies by the tubing material. Be sure to confirm the holding force of each material before operation. After connecting the tubing, care should be taken not to put excessive force (tensile force, compression, bending, etc.) on the tubing. If an external force of 20 N or more is applied to the tube inlet, the inlet may become damaged, and leakage or breakage could occur.

When the tubing is long or according to the operating conditions, tubing may thrash about, causing damage to the tube inlet of the solenoid valve, or the tubing to come off or deteriorate.

In this case, secure the tubing to prevent its uncontrolled movement.

4. When piping the fitting to the solenoid valve, the installation method and tightening torque value may vary depending on the seal structure (shape) or material of the fitting to be used. Check the methods and precautions recommended by the fitting manufacturer to be used, and be sure to check for leakage.

The table below shows the tightening method using the KQ2 series.

| Model | Location | Thread size | Tightening method | Tightening torque [N·m] (Reference) |
|--|--|-----------------------|---|--|
| LVM11 | Body | M5 | After tightening by hand, tighten 1/6 to 1/4 turn with a tightening tool. | Material PEEK: 0.5 to 0.7 |
| LVM07R6, LVM09R3, 09R4, 09R6, 095R | | M6 or 1/4-28UNF | After tightening by hand, tighten 1/6 to 1/4 turn with a tightening tool. | Material PEEK: 0.5 to 0.6 |
| LVM10R3, 10R4, 10R6, 105R | | M6 or 1/4-28UNF | After tightening by hand, tighten 1/6 to 1/4 turn with a tightening tool. | Material PVDF: 0.6 to 0.8 Material PFA: 0.2 to 0.25 |
| LVM15R3, 15R4, 15R6, 155R | Base mounted (With sub-plate) | M6 or 1/4-28UNF | After tightening by hand, tighten 1/6 to 1/4 turn with a tightening tool. | Material PVDF: 0.6 to 0.8 |
| LVM20R3, | | Rc1/8 or NPT1/8 | Tighten approximately 4 turns. | Material PVDF: 0.5 to 0.6 |
| 20R4, 205R | | G1/8 | After tightening by hand, tighten 1/3 to 1/2 turn with a tightening tool. | Material PVDF: 0.4 to 0.6 |



LVM Series Specific Product Precautions 3

Be sure to read this before handling the products. Please contact SMC when it is used in conditions other than the specifications.

Wiring

⚠ Caution

- 1. Use electrical circuits which do not generate chattering in their contacts.
- 2. Use voltage which is within ±10% of the rated voltage. However, when response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
- 3. Apply the correct voltage.

Applying incorrect voltage may cause a malfunction or a burned coil.

Connect the wires so that an external force of 10 N or more is not applied to the lead wire.

Otherwise, the coil will burn.

5. Units with power saving circuits use polarized electrical connections.

Red (+), Black (-)



Fluid Properties

⚠ Warning

Liquid (chemicals)

Component crystallizes or clots depending on its nature. Leakage will occur when a crystallized or clotted component is caught between the sealing parts.

Take measures to clean such component if necessary.

Water

Install a filter strainer of about 100 mesh on the inlet side of the piping.

Air

Compressed air filtered with a filter with filtration rating of 5 μm or less, which is mounted on the inlet side of the piping, should be used.

Operating Environment

<u> M</u> Warning

- 1. Do not use the product in a place where there is contact with corrosive gases, chemicals or liquids.
- 2. Do not use in explosive atmospheres.
- Do not use in locations subject to excessive vibration or impact.

Impact resistance of this solenoid valve is 150 m/s². Vibration resistance of this solenoid valve is 30 m/s².

4. Do not use in locations where radiated heat will be received from nearby heat sources.

Maintenance

⚠ Warning

1. Removing the product

Shut off the fluid supply and release the fluid pressure in the system. Shut off the power supply. Remove the product.

- 2. Before operating, remove residual chemicals and completely replace it with pure water, air, etc.
- 3. Do not disassemble the product.

Products which have been disassembled cannot be guaranteed. If disassembly is necessary, please contact SMC.

How to Use Plug Connector


⚠ Caution


Attaching connectors

Hold the lever and connector unit between your fingers and insert straight onto the pins of the solenoid valve so that the lever's pawl is pushed into the groove and locks.

Detaching connectors

Remove the pawl from the groove by pushing the lever downward with your thumb, and pull the connector straight out.





LVM Series Spare Parts

■ Mounting Screw (Base mounted, For Body mounting)

| Applicable model | Part number | Qty. |
|---------------------------|--------------|------|
| LVM07R6 | LVM070-SC | 20 |
| LVM09R3, 09R4, 09R6, 095R | LVM090-SC | 20 |
| LVM13 | 1)////100 CC | 00 |
| LVM10R3, 10R4, 10R6, 105R | LVM100-SC | 20 |
| LVM15R3, 15R4, 15R6, 155R | LVM150-SC | 20 |
| LVM20R3, 20R4, 205R | LVM200-SC | 20 |

■ Sub-plate (Base mounted, Option)

| Applicable model | Part number | | Qty. |
|---|---------------|---------------------------|------|
| LVM07R6 (Material: PEEK) | LVM070-S2-3-□ | | 1 |
| LVM09R3, 09R4, 09R6 (Material: PEEK) | LVM090-S2-3-□ | | 1 |
| LVM095R (Material: PEEK) | LVM090-S1-3-□ | □: Port size | 1 |
| LVM10R3, 10R4, 10R6 (Material: PVDF) | LVM100-S2-1-□ | M6: M6 x 1 | 1 |
| LVM10R3, 10R4, 10R6 (Material: PFA) | LVM100-S2-2-□ | 28: 1/4-28UNF | 1 |
| LVM105R (Material: PVDF) | LVM100-S1-1-□ | | 1 |
| LVM105R (Material: PFA) | LVM100-S1-2-□ | | 1 |
| LVM15R3, 15R4 | LVM150-S2-1-□ | □: Port size | 1 |
| LVM15R6 | LVM150-S6-1-□ | M6: M6 x 1 | 1 |
| LVM155R | LVM150-S1-1-□ | 28: 1/4-28UNF | 1 |
| LVM20R3, 20R4 | LVM200-S2-1-□ | ☐: Port size 01: Rc1/8 | 1 |
| LVM205R | LVM200-S1-1-□ | F1: G1/8 N1: NPT1/8 | 1 |

■ Gasket, O-ring (Base mounted, For Interface mounting)


| Applicable model | Part number | | Qty. |
|---------------------------|-------------|--|------|
| LVM07R6 | LVM070-GS-□ | | 10 |
| LVM09R3, 09R4, 09R6, 095R | LVM090-GS-□ | ☐: Material A: EPDM B: FKM C: Kalrez® | 10 |
| LVM13 | LVM13-GS-□ | | 10 |
| LVM10R3, 10R4, 10R6, 105R | LVM100-OR-□ | | 30 |
| LVM15R3, 15R4, 15R6, 155R | LVM150-GS-□ | | 10 |
| LVM20R3, 20R4, 205R | LVM200-OR-□ | | 30 |

■ Bracket (Option)

| Bracket (Option) | | | | | |
|------------------------|--------------|------|----------------------|--|--|
| Applicable model | Part number | Qty. | Note | | |
| LVM11 | LVM10-14A-1 | 1 | | | |
| LVM10R1, 10R2, 102R | LVM100-10A-1 | 1 | With mounting screws | | |
| LVM10R3 10R4 10R6 105R | LVM100-18A-1 | 1 | | | |

■ Plug Connector

| Applicable model | Part number | | Qty. |
|-------------------------------|---------------|--|------|
| LVM09/090 | SY100-30-4A-□ | ☐: Lead wire length Nil: 300 mm 6: 600 mm 10: 1000 mm 30: 3000 mm | 1 |
| LVM11/13/10/100/15/150/20/200 | AXT661-14A-□ | ☐: Lead wire length Nii: 300 mm 6: 600 mm 10: 1000 mm 20: 2000 mm 30: 3000 mm | 1 |





⚠ Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of "Caution," "Warning" or "Danger." They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)*1), and other safety regulations.

Caution: Caution indicates a hazard with a low level of risk which, If not avoided, could result in minor or moderate injury.

Warning: Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

⚠ Danger: Danger if not avoided, will result in death or serious injury. **Danger** indicates a hazard with a high level of risk which, *1) ISO 4414: Pneumatic fluid power - General rules relating to systems.

ISO 4413: Hydraulic fluid power – General rules relating to systems.

IEC 60204-1: Safety of machinery - Electrical equipment of machines. (Part 1: General requirements)

ISO 10218-1: Manipulating industrial robots - Safety.

⚠Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/ equipment until safety is confirmed.

- 1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
- 2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
- 3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

- 1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
- 2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
- 3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
- 4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

⚠ Caution

1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.

If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary. If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/ **Compliance Requirements**

The product used is subject to the following "Limited warranty and Disclaimer" and "Compliance Requirements".

Read and accept them before using the product.

Limited warranty and Disclaimer

- 1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.*2)
 - Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- 2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- 3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.
 - 2) Vacuum pads are excluded from this 1 year warranty.

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.

Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

- 1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- 2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

⚠ Caution

SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

Revision History

LU

- Edition B * The LVM09/090, LVM15/150, and LVM20/200 series have been added.
 - * The model numbers of the LVM10/100 series have been changed.
 - * Number of pages has been increased from 12 to 28.

- Edition C * The LVM07 series has been added.
 - * The body-ported type and new variations have been added to the LVM09 series.
 - * New variations have been added to the LVM15 series.
 - * Various options have been added.
 - * Number of pages has been increased from 28 to 48.

↑ Safety Instructions | Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.